INCH-POUND


MS51500G
w/ AMENDMENT 1
8 July 2026
SUPERSEDING
MS51500G
21 July 2020

DETAIL SPECIFICATION SHEET

FITTINGS, HYDRAULIC TUBE, FLARED 37 DEGREE AND FLARELESS, ADAPTER, STRAIGHT, MALE PIPE END TO TUBE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18866.

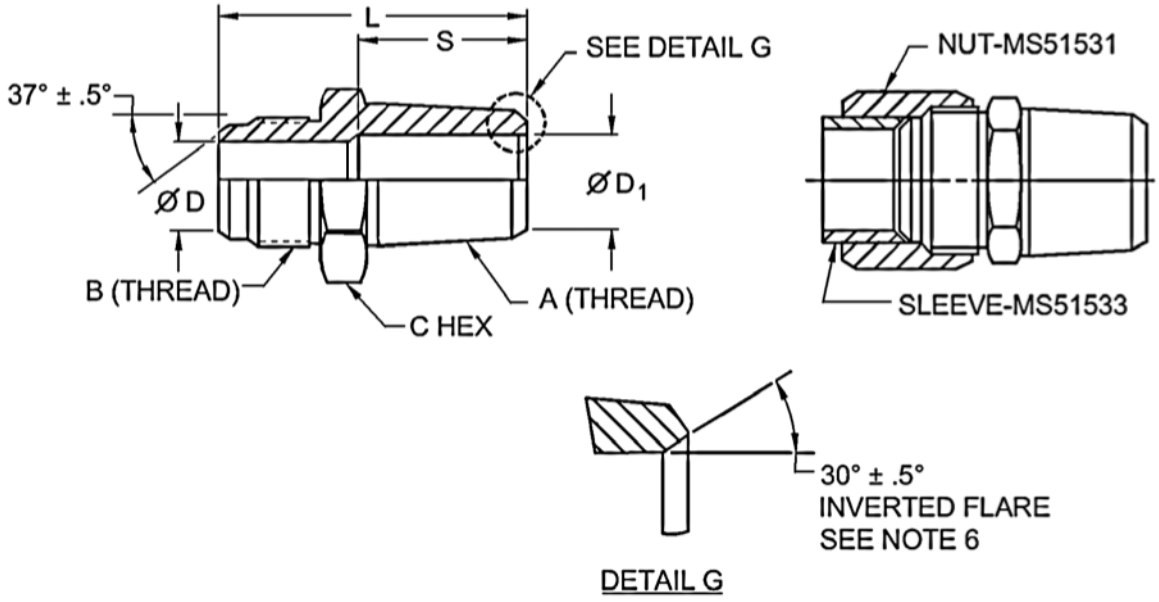

See notes at end of figure.

FIGURE 1. Male connector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

Suffix designator		Tube O.D. Nom	A Pipe Thread NPTF	B Straight thread	C Hex flat nom
Assembly 4/	Body				
A2	B2	0.1250 (3.175)	0.125 -27	0.3125-24 UNF-2A	7/16
A3	B3	0.1875 (4.763)	0.125 -27	0.3750-24 UNF-2A	7/16
A4	B4	0.2500 (6.350)	0.125 -27	0.4375-20 UNF-2A	1/2
A4-4	B4-4	0.2500 (6.350)	0.250 - 18	0.4375-20 UNF-2A	9/16
A5	B5	0.3125 (7.938)	0.125 -27	0.5000-20 UNF-2A	9/16
A5-4	AB5-4	0.3125 (7.938)	0.250 - 18	0.5000-20 UNF-2A	9/16
A6-2	B6-2	0.3750 (9.525)	0.125 -27	0.5625-18 UNF-2A	5/8
A6	B6	0.3750 (9.525)	0.250 - 18	0.5625-18 UNF-2A	5/8
A6-6	B6-6	0.3750 (9.525)	0.375 - 18	0.5625-18 UNF-2A	3/4
A6-8	B6-8	0.3750 (9.525)	0.500 - 14	0.5625-18 UNF-2A	7/8
A8-4	B8-4	0.5000 (12.700)	0.250 - 18	0.7500-16 UNF-2A	13/16
A8	B8	0.5000 (12.700)	0.375 - 18	0.7500-16 UNF-2A	13/16
A8-8	B8-8	0.5000 (12.700)	0.500 - 14	0.7500-16 UNF-2A	7/8
A8-12	B8-12	0.5000 (12.700)	0.750 - 14	0.7500-16 UNF-2A	1 1/8
A10-6	B10-6	0.6250 (15.875)	0.375 - 18	0.8750-14 UNF-2A	15/16
A10	B10	0.6250 (15.875)	0.500 - 14	0.8750-14 UNF-2A	15/16
A12-8	B12-8	0.7500 (19.050)	0.500 - 14	1.0625-12 UN-2A	1 1/8
A12	B12	0.7500 (19.050)	0.750 - 14	1.0625-12 UN-2A	1 1/8
A14	B14	0.8750 (22.225)	0.750 - 14	1.1875-12 UN-2A	1 1/4
A16-12	B16-12	1.0000 (25.400)	0.750 - 14	1.3125-12 UN-2A	1 3/8
A16	B16	1.0000 (25.400)	1.000 - 11 1/2	1.3125-12 UN-2A	1 3/8
A20	B20	1.2500 (31.750)	1.250 - 11 1/2	1.6250-12 UN-2A	1 11/16
A24	B24	1.5000 (38.100)	1.500 - 11 1/2	1.8750-12 UN-2A	2
A32	B32	2.0000 (50.800)	2.000 - 11 1/2	2.500-12 UN-2A	2 5/8

See notes at end of figure.

FIGURE 1. Male connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

Suffix designator		D dia.		D_1 dia. inches (mm)	L inches (mm) ±0.020	S max inches (mm)
Assembly 4/	Body	Basic inches (mm)	Tolerance inches (mm)			
A2	B2	0.062 (1.57)	±0.003 (0.08)	0.188 (4.78)	1.110 (28.19)	0.490 (12.45)
A3	B3	0.125 (3.18)	±0.003 (0.08)	0.188 (4.78)	1.140 (28.96)	0.490 (12.45)
A4	B4	0.172 (4.37)	±0.003 (0.08)	0.188 (4.78)	1.220 (30.99)	0.490 (12.45)
A4-4	B4-4	0.172 (4.37)	±0.003 (0.08)	0.281 (7.14)	1.420 (36.07)	0.690 (17.53)
A5	B5	0.234 (5.94)	±0.003 (0.08)	0.188 (4.78)	1.220 (30.99)	0.640 (16.26)
A5-4	B5-4	0.234 (5.94)	±0.003 (0.08)	0.281 (7.14)	1.420 (36.07)	0.690 (17.53)
A6-2	B6-2	0.297 (7.54)	±0.004 (0.10)	0.188 (4.78)	1.240 (31.50)	0.480 (12.19)
A6	B6	0.297 (7.54)	±0.004 (0.10)	0.281 (7.14)	1.430 (36.32)	0.670 (17.02)
A6-6	B6-6	0.297 (7.54)	±0.004 (0.10)	0.406 (10.31)	1.430 (36.32)	0.580 (14.73)
A6-8	B6-8	0.297 (7.54)	±0.004 (0.10)	0.531 (13.49)	1.690 (42.93)	0.710 (18.03)
A8-4	B8-4	0.391 (9.93)	±0.004 (0.10)	0.281 (7.14)	1.530 (38.86)	0.680 (17.27)
A8	B8	0.391 (9.93)	±0.004 (0.10)	0.406 (10.31)	1.530 (38.86)	0.680 (17.27)
A8-8	B8-8	0.391 (9.93)	±0.004 (0.10)	0.531 (13.49)	1.790 (45.47)	0.810 (20.57)
A8-12	B8-12	0.391 (9.93)	±0.004 (0.10)	0.719 (18.26)	1.850 (46.99)	0.730 (18.54)
A10-6	B10-6	0.484 (12.29)	±0.004 (0.10)	0.406 (10.31)	1.700 (43.18)	0.720 (18.29)
A10	B10	0.484 (12.29)	±0.004 (0.10)	0.531 (13.49)	1.890 (48.01)	0.910 (23.11)
A12-8	B12-8	0.609 (15.47)	±0.005 (0.13)	0.531 (13.49)	2.060 (52.32)	0.940 (23.88)
A12	B12	0.609 (15.47)	±0.005 (0.13)	0.719 (18.26)	2.060 (52.32)	0.940 (23.88)
A14	B14	0.718 (18.24)	±0.005 (0.13)	0.719 (18.26)	2.090 (53.09)	---
A16-12	B16-12	0.844 (21.44)	+0.007 (0.18) -0.005 (0.13)	0.719 (18.26)	2.110 (53.59)	0.940 (23.88)
A16	B16	0.844 (21.44)	+0.007 (0.18) -0.005 (0.13)	0.938 (23.83)	2.300 (58.42)	1.130 (28.70)
A20	B20	1.078 (27.38)	+0.008 (0.20) -0.005 (0.13)	1.250 (31.75)	2.450 (62.23)	1.200 (30.48)
A24	B24	1.312 (33.32)	+0.010 (0.25) -0.005 (0.13)	1.500 (38.10)	2.680 (68.07)	1.270 (32.26)
A32	B32	1.781 (45.24)	+0.010 (0.25) -0.005 (0.13)	1.938 (49.23)	3.110 (78.99)	1.370 (34.80)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Break all sharp edges and remove all burrs and slivers.
4. Assemblies are only furnished to this specification (body, nut, and sleeve). Bodies are not to be stocked stored or issued.
5. At manufacturers option, through passages may conform with the smaller diameter specified or the appropriate end may be counter-bored to the larger diameter for depth “S”.
6. When specified in the Part or Identifying Number (PIN), provide a 30 degree inverted flare seating surface on the inside edge of the “A” pipe thread end.
7. Dimensions and tolerances not shown shall be in accordance with SAE-J514/1 for 37 degree flared fittings.

FIGURE 1. Male connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Fittings shall be specified on figure 1 and in table I.

Components of the assemblies shall be of the same material and finish.


Materials shall be in accordance with MIL-DTL-18866.

Finish and finish designators shall be in accordance with MIL-DTL-18866.

Unless otherwise specified in MIL-DTL-18866, all plating's shall be capable of meeting 96-hour salt spray test in accordance with ASTM B117. The fittings shall show no evidence of red corrosion after 96 hours of salt spray. Fluid passages, other openings, and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.

Maximum operating pressure. Maximum operating pressure shall be in accordance with SAE-J514/1.

PIN: The PIN consists of the letters "MS", the specification number, a letter for assembly or body number for nipple size, blank or letter for material/finish designator and "blank" or the number 1 for an inverted flare.

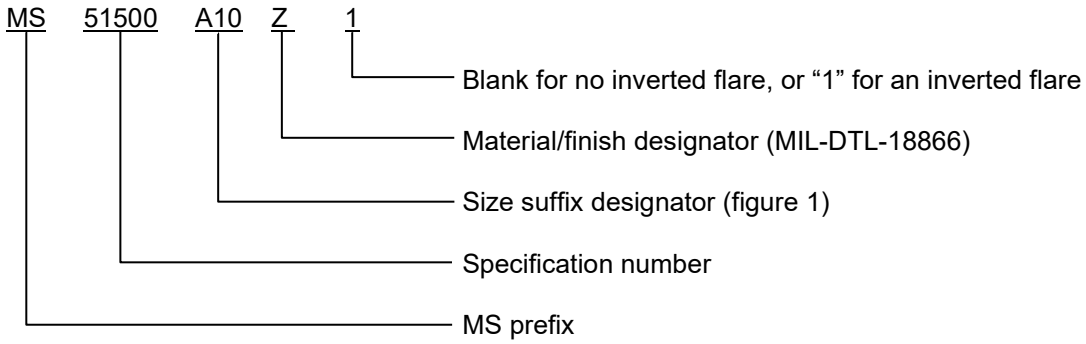

PIN example: MS51500A10Z1 indicates an adapter, straight, 0.8750-14 UNF-2A tube to 0.5000 -14 NPTF, steel with zinc plating, inverted flare.

Marking shall be in accordance with MIL-DTL-18866.

Class I and II ozone depleting substances (ODS) shall not be used in MS51500 or any referenced procedures.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Phosphate coating finish "P" has been replaced by "KA".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

NOTE: The following restrictions do not apply to manufactures of the fittings and is applicable only to OEM's and users.

Tapered pipe thread connections are generally prohibited in high shock applications.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Army and Marine ground forces zinc plating's. PIN codes FC, FD, Z, and ZC finishes have a chromate conversion coating which includes hexavalent chromium and are not recommended for Army and Marine ground systems. The use of coatings depositing hexavalent chromium for Army vehicles is prohibited unless otherwise explicitly stated in the contract as a requirement. For new designs PIN codes FC, FD, Z, and ZC are not to be supplied to Army and Marine ground forces. MIL-PRF-32647 Type KA is intended as a hazardous free plating material and is a direct replacement for zinc plating with a hexavalent chromium conversion coating. KA has an equivalent torque/tension as the plating's replaced.

Army and Marine ground vehicles. The use of cadmium plating for Army and Marine ground vehicles is prohibited unless otherwise explicitly stated in the contract as a requirement.

Army ground vehicle applications cadmium plating. Pin code J or KB may be substituted for cadmium ("Blank" PIN code) for Army ground vehicle applications. MIL-PRF-32647 Type KB is intended as a hazardous free plating material and is a direct replacement for cadmium plating ("Blank" PIN code). KB has an equivalent torque/tension as cadmium.

NAVSEA shipboard owned equipment. Cadmium is prohibited from use in NAVSEA-owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2, unless otherwise approved by NAVSEA.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

MIL-PRF-32647	ASTM B117
MS51531	SAE-J514/1
MS51533	T9070-AL-DPC-020/077-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - SH
Air Force - 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2026-046)

Review activities:
Army - AR, AV, MI
Navy - AS, CG, SA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.