
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new applications and design applications and for repetitive use shall be made from this document, when applicable.

FED. SUP. CLASS 4720

CONFIGURATION AND MATERIAL


CORROSION RESISTANT STEEL (450° F)

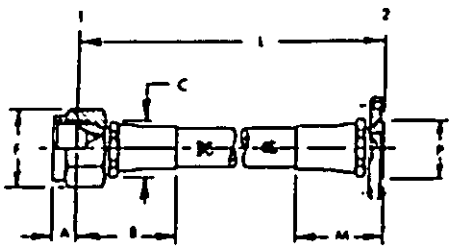

STYLE "A"

Army - AV
Navy -
Air Force -
DLA -


User Activities:

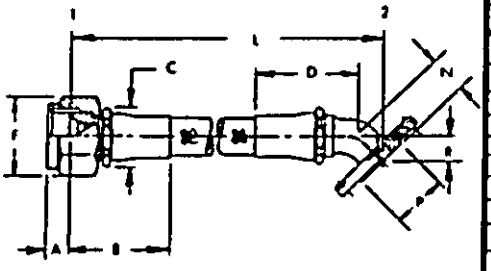


STYLE "B"

Army - AV
Navy -
Air Force -
DLA - CS

Review Activities:

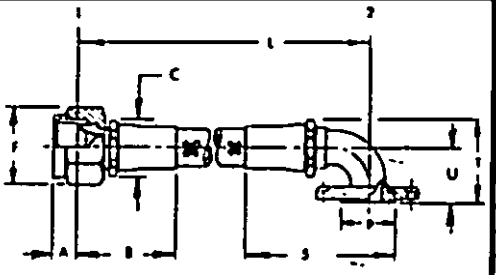

STYLE "C"

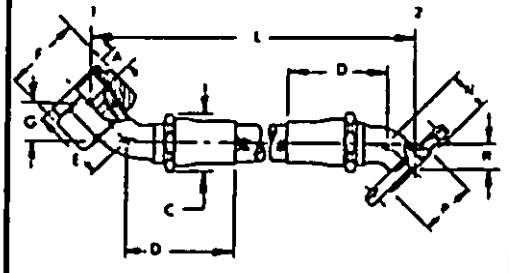

STYLE "D"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"M" MAX.	"P" MAX.	"P" MAX.
STRAIGHT	STRAIGHT							
		-8C	.438	1.465	.880	1.560	1.016	.875
		-10C	.515	1.680	.967	1.570	1.158	1.000
		-12C	.570	1.727	1.122	1.640	1.447	1.250
		-16C	.620	2.101	1.480	1.750	1.736	1.500
		-20C	.640	2.255	1.750	1.990	2.328	1.844
		-24C	.765	2.400	2.150	2.260	2.621	2.125

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"D" MAX.	"M" MAX.	"P" MAX.	"R" MIN.	"R" MAX.	"F" MAX.
STRAIGHT	45 DEG										
		-8C	.438	1.466	.880	1.722	.606	.875	.303	.428	1.016
		-10C	.515	1.680	.967	2.037	.658	1.000	.340	.465	1.158
		-12C	.570	1.727	1.122	2.368	.789	1.250	.433	.558	1.447
		-16C	.620	2.101	1.480	2.583	.929	1.500	.470	.657	1.736
		-20C	.640	2.255	1.750	2.946	1.020	1.844	.539	.721	2.328
		-24C	.765	2.400	2.150	3.210	1.186	2.125	.589	.839	2.621

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.	"F" MAX.
STRAIGHT	90 DEG										
		-8C	.438	1.465	.880	.875	2.320	1.422	.857	.982	1.016
		-10C	.515	1.680	.967	1.000	2.875	1.499	.861	1.015	1.158
		-12C	.570	1.727	1.122	1.250	3.606	1.807	1.032	1.246	1.447
		-16C	.620	2.101	1.480	1.500	3.981	2.174	1.156	1.434	1.736
		-20C	.640	2.255	1.750	1.844	4.435	2.590	1.344	1.715	2.328
		-24C	.765	2.400	2.150	2.125	5.075	3.103	1.516	2.028	2.621

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG	45 DEG							
		-8C	.438	.880	1.722	1.332	1.016	.445
		-10C	.515	.967	2.037	1.488	1.158	.501
		-12C	.570	1.122	2.368	1.667	1.447	.564
		-16C	.620	1.480	2.583	1.879	1.736	.609
		-20C	.640	1.750	2.946	2.058	2.328	.697
		-24C	.765	2.150	3.210	2.400	2.621	.785

HOSE SIZE	"G" MAX.	"N" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
-8C	.632	.606	.875	.303	.428
-10C	.688	.658	1.000	.340	.465
-12C	.775	.789	1.250	.433	.558
-16C	.857	.929	1.500	.470	.657
-20C	1.017	1.020	1.844	.539	.721
-24C	1.127	1.186	2.125	.589	.839

Ⓑ ENTIRE STANDARD REVISED.

APPROVED 16 AUG 71 REVISED Ⓐ 15 DEC 76 Ⓑ 30 June 1985


P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MILITARY STANDARD MS 8007
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 1 of 10 FSC 4720

Project No. 4720-0538

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL
CORROSION RESISTANT STEEL (450° F)


FED. SUP. CLASS 4720

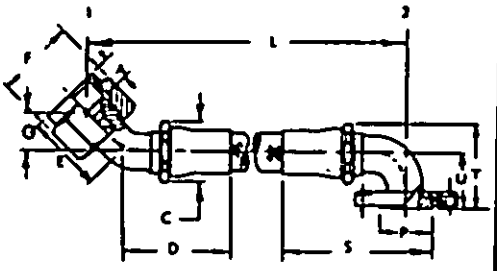

STYLE "E"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG	90 DEG							
		-8C	.438	.880	1.722	1.332	1.014	.445
		-10C	.515	.967	2.037	1.488	1.158	.501
		-12C	.570	1.122	2.368	1.667	1.447	.564
		-16C	.620	1.480	2.583	1.879	1.736	.609
		-20C	.640	1.750	2.946	2.058	2.328	.697
		-24C	.765	2.150	3.210	2.400	2.621	.785

HOSE SIZE	"G" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.		
-8C	.632	.875	2.320	1.422	.857	.982		
-10C	.688	1.000	2.875	1.499	.861	1.015		
-12C	.775	1.250	3.606	1.807	1.032	1.246		
-16C	.857	1.500	3.981	2.174	1.156	1.434		
-20C	1.017	1.844	4.435	2.590	1.344	1.715		
-24C	1.127	2.125	5.075	3.103	1.516	2.028		

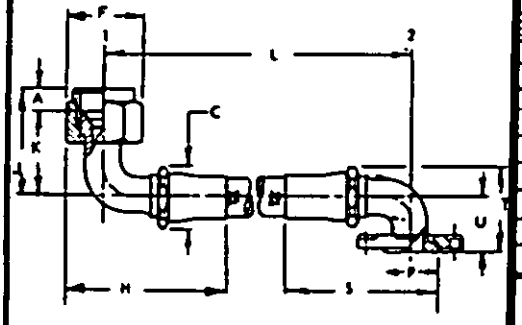

STYLE "F"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.	"K" MIN.
90 DEG	90 DEG							
		-8C	.438	.880	1.014	2.495	1.946	.810
		-10C	.515	.967	1.158	2.955	2.340	1.056
		-12C	.570	1.122	1.447	3.705	2.722	1.341
		-16C	.620	1.480	1.736	4.100	3.254	1.465
		-20C	.640	1.750	2.328	4.835	3.727	1.747
		-24C	.765	2.150	2.621	5.480	4.212	1.997

HOSE SIZE	"K" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.		
-8C	1.092	.875	2.320	1.422	.857	.982		
-10C	1.341	1.000	2.875	1.499	.861	.986		
-12C	1.591	1.250	3.606	1.807	1.032	1.246		
-16C	1.840	1.500	3.981	2.174	1.156	1.434		
-20C	2.233	1.844	4.435	2.590	1.344	1.715		
-24C	2.372	2.125	5.075	3.103	1.516	2.028		

Army - AV
Navy - AS
Air Force - 11
DLA - CS

User Activities:

Review Activities:

Army - AV
Navy - AS
Air Force - 11
DLA - CS

APPROVED 16 AUG 71 REVISED 15 DEC 76 30 June 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MS 8007
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 2 of 10 FSC 4720


Project No. 4720-0538

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL

CORROSION RESISTANT STEEL (450° F)


FED. SUP. CLASS 4720

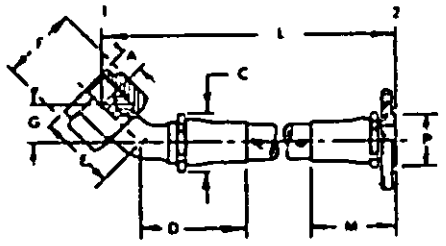

STYLE "G"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.
45 DEG	STRAIGHT						
		-8C	.438	.880	1.722	1.332	1.019
		-10C	.515	.967	2.037	1.488	1.158
		-12C	.570	1.122	2.368	1.667	1.447
		-16C	.620	1.480	2.583	1.879	1.736
		-20C	.640	1.750	2.946	2.058	2.328
		-24C	.765	2.150	3.210	2.400	2.621

HOSE SIZE	"G" MIN.	"G" MAX.	"M" MAX.	"P" MAX.
-8C	.445	.632	1.560	.875
-10C	.501	.688	1.570	1.000
-12C	.564	.775	1.640	1.250
-16C	.609	.857	1.750	1.500
-20C	.697	1.017	1.990	1.844
-24C	.785	1.127	2.260	2.125

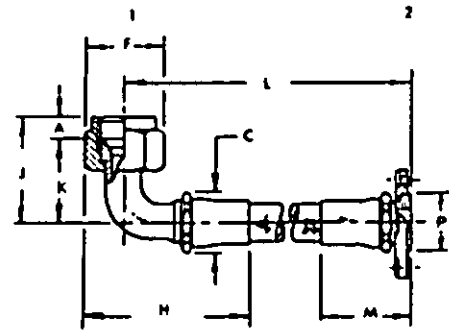

STYLE "H"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
90 DEG	STRAIGHT						
		-8C	.438	.880	1.014	2.495	1.946
		-10C	.515	.967	1.158	2.955	2.340
		-12C	.570	1.122	1.447	3.705	2.722
		-16C	.620	1.480	1.736	4.100	3.254
		-20C	.640	1.750	2.328	4.835	3.727
		-24C	.765	2.150	2.621	5.480	4.212

HOSE SIZE	"K" MIN.	"K" MAX.	"M" MAX.	"P" MAX.
-8C	.810	1.092	1.560	.875
-10C	1.056	1.341	1.570	1.000
-12C	1.341	1.591	1.640	1.250
-16C	1.465	1.840	1.750	1.500
-20C	1.747	2.233	1.990	1.844
-24C	1.997	2.372	2.260	2.125

APPROVED 16 AUG 71 REVISED A 15 DEC 76 B 30 June 1983

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - DS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Aeronautical Systems Division, ATTN: ENSSP, Wright-Patterson AFB, OH 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES	

MILITARY STANDARD

MS 8007

SHEET 3 of 10 FSC 4720


Project No. 4720-0538

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL

CORROSION RESISTANT STEEL (450° F)

FED. SUP. CLASS 4720

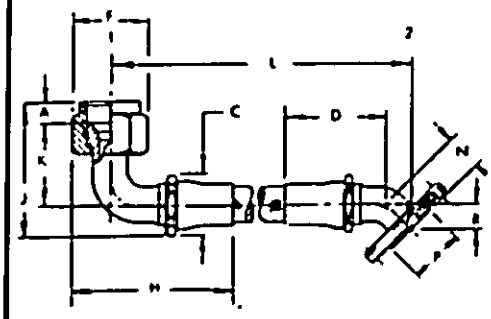

STYLE "J"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
90 DEG	45 DEG							
		-8C	.438	.880	1.722	1.014	2.495	1.946
		-10C	.515	.967	2.037	1.158	2.955	2.340
		-12C	.570	1.122	2.368	1.447	3.705	2.722
		-16C	.620	1.480	2.583	1.736	4.100	3.254
		-20C	.640	1.750	2.946	2.328	4.835	3.727
		-24C	.765	2.150	3.210	2.621	5.480	4.212

HOSE SIZE	"K" MIN.	"K" MAX.	"N" MAX.	"P" MAX.	"R" MIN.	"R" MAX.		
-8C	.810	1.092	.606	.875	.303	.428		
-10C	1.056	1.341	.658	1.000	.340	.465		
-12C	1.341	1.591	.789	1.250	.433	.558		
-16C	1.465	1.840	.929	1.500	.470	.657		
-20C	1.747	2.233	1.020	1.844	.534	.721		
-24C	1.997	2.372	1.186	2.125	.589	.839		

User Activities: Army - AV, Navy - AS, Air Force - 11, DLA - CS

Review Activities: Army - AV, Navy - AS, Air Force - 11, DLA - CS

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (B) 30 June 1985.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MS 8007
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 4 of 10 FSC 4720


Project No. 4720-0538

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL


COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (275° F)

FED. SUP. CLASS 4720

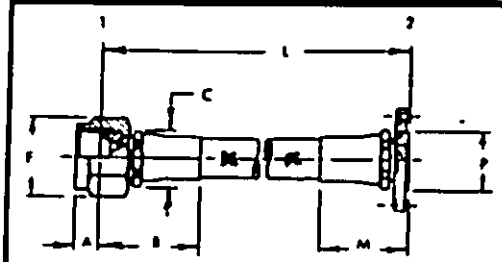


STYLE "K"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"M" MAX.	"F" MAX.	"P" MAX.
STRAIGHT	STRAIGHT							
		-8	.438	1.465	.880	1.560	1.014	.875
		-10	.515	1.680	.957	1.570	1.158	1.000
		-12	.570	1.777	1.122	1.640	1.447	1.250
		-16	.620	2.101	1.480	1.750	1.736	1.500
		-20	.640	2.255	1.750	1.990	2.328	1.864
		-24	.765	2.400	2.150	2.260	2.621	2.125

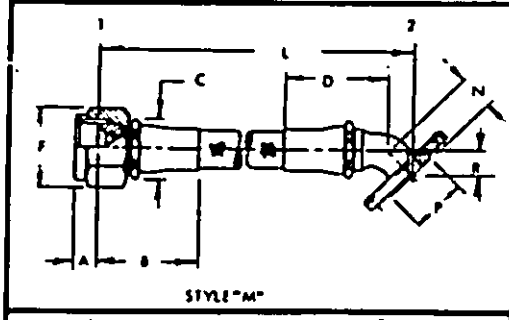


STYLE "M"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"D" MAX.	"M" MAX.	"P" MAX.	"R" MIN.	"R" MAX.	"F" MAX.
STRAIGHT	45 DEG.										
		-8	.438	1.465	.880	1.722	.606	.875	.303	.428	1.014
		-10	.515	1.680	.957	2.057	.658	1.000	.340	.465	1.158
		-12	.570	1.777	1.122	2.368	.789	1.250	.433	.558	1.447
		-16	.620	2.102	1.480	2.583	.929	1.500	.490	.657	1.736
		-20	.640	2.255	1.750	2.946	1.020	1.864	.534	.721	2.328
		-24	.765	2.400	2.150	3.210	1.186	2.125	.589	.839	2.621

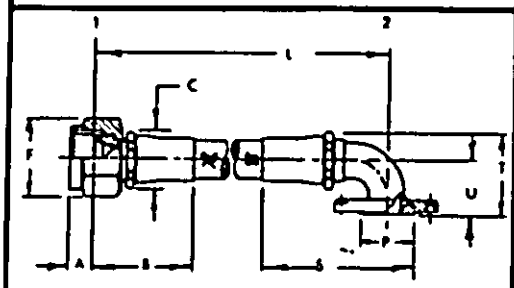

STYLE "N"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.	"F" MAX.
STRAIGHT	90 DEG.										
		-8	.438	1.465	.880	.875	2.320	1.422	.857	.982	1.014
		-10	.515	1.680	.957	1.000	2.875	1.499	.861	1.015	1.158
		-12	.576	1.777	1.122	1.250	3.606	1.807	1.082	1.246	1.447
		-16	.620	2.101	1.480	1.500	3.981	2.174	1.156	1.434	1.736
		-20	.640	2.255	1.750	1.864	4.435	2.590	1.344	1.715	2.328
		-24	.765	2.400	2.150	2.125	5.075	3.103	1.516	2.028	2.621

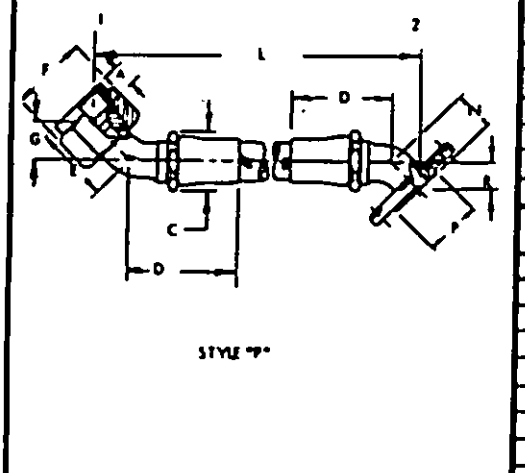

STYLE "P"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG.	45 DEG.							
		-8	.438	.880	1.722	1.332	1.014	.446
		-10	.515	.957	2.057	1.488	1.158	.501
		-12	.570	1.122	2.368	1.667	1.447	.564
		-16	.620	1.480	2.583	1.879	1.736	.609
		-20	.640	1.750	2.946	2.058	2.328	.697
		-24	.765	2.150	3.210	2.400	2.621	.785

HOSE SIZE	"G" MAX.	"M" MAX.	"P" MAX.	"R" MIN.	"R" MAX.			
-8	.632	.606	.875	.303	.428			
-10	.688	.658	1.000	.340	.465			
-12	.775	.789	1.250	.433	.558			
-16	.857	.929	1.500	.490	.657			
-20	1.017	1.020	1.864	.534	.721			
-24	1.127	1.186	2.125	.589	.839			

APPROVED 16 AUG 71 — REVISED 15 DEC 76 — 30 June 1983

Army - Navy - Air Force - DLA - DS

User Activities:

Army - Navy - Air Force - DLA - GS

Review Activities:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.


P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MILITARY STANDARD
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	MS 8007
			SHEET 5 of 10 PSC 4720

Project No. 4720-0538

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL
COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (775° F)


FED. SUP CLASS 4720

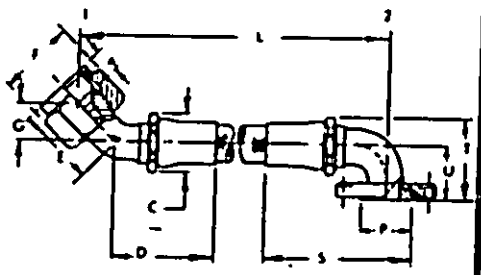

STYLE "B"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG.	90 DEG.							
		-8	.438	.880	1.722	1.352	1.014	.445
		-10	.515	.967	2.037	1.488	1.158	.501
		-12	.570	1.122	2.368	1.667	1.447	.564
		-16	.620	1.480	2.583	1.809	1.736	.609
		-20	.640	1.750	2.946	2.058	2.328	.697
		-24	.765	2.150	3.210	2.400	2.621	.785

HOSE SIZE	"G" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
-8	.632	.875	2.320	1.422	.857	.982
-10	.688	1.000	2.875	1.699	.861	1.015
-12	.775	1.250	3.606	1.807	1.052	1.246
-16	.857	1.500	3.981	2.174	1.156	1.434
-20	1.017	1.844	4.435	2.590	1.344	1.715
-24	1.127	2.125	5.075	3.103	1.516	2.028

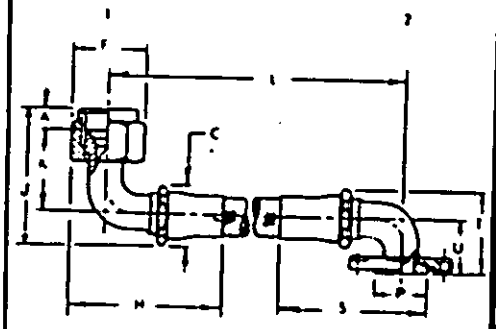

STYLE "S"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"E" MAX.	"F" MAX.	"J" MAX.	"K" MIN.
90 DEG.	90 DEG.							
		-8	.438	.880	1.014	2.495	1.946	.810
		-10	.515	.967	1.158	2.955	2.340	1.066
		-12	.570	1.122	1.447	3.705	2.772	1.341
		-16	.620	1.480	1.736	4.100	3.254	1.466
		-20	.640	1.750	2.328	4.835	3.727	1.747
		-24	.765	2.150	2.621	5.480	4.212	1.997

HOSE SIZE	"K" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
-8	1.092	.875	2.320	1.422	.857	.982
-10	1.341	1.000	2.875	1.699	.861	1.015
-12	1.591	1.250	3.606	1.807	1.052	1.246
-16	1.840	1.500	3.981	2.174	1.156	1.434
-20	2.233	1.844	4.435	2.590	1.344	1.715
-24	2.372	2.125	5.075	3.103	1.516	2.028

User Activities: Army - ; Navy - ; Air Force - DLA - CS

Review Activities: Army - ; Navy - ; Air Force - DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all end engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 16 AUG 71 REVISED 15 DEC 76 30 June 1985


P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MILITARY STANDARD MS 8007
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 6 of 10 FSC 4720

Project No. 4720-0538

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL
COMBINATION ALUMINUM AND
CORROSION RESISTANT STEEL (275° F)


FED. SUP CLASS — 4720

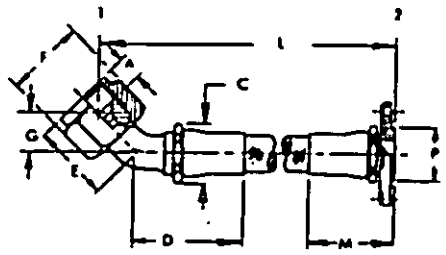

STYLE "T"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.
45 DEG.	STRAIGHT						
		-8	.438	.880	1.722	1.332	1.014
		-10	.515	.967	2.037	1.488	1.158
		-12	.570	1.122	2.368	1.667	1.447
		-16	.620	1.480	2.583	1.879	1.736
		-20	.640	1.750	2.946	2.058	2.328
		-24	.765	2.150	3.210	2.400	2.621

HOSE SIZE	"G" MIN.	"G" MAX.	"M" MAX.	"P" MAX.
-8	.446	.632	1.560	.875
-10	.501	.688	1.570	1.000
-12	.564	.775	1.640	1.250
-16	.609	.857	1.750	1.500
-20	.687	1.017	1.930	1.875
-24	.735	1.127	2.260	2.125

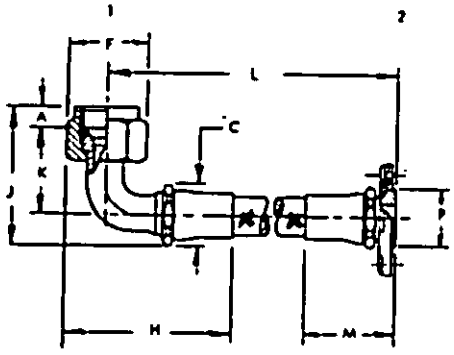

STYLE "U"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
90 DEG.	STRAIGHT						
		-8	.438	.880	1.014	2.495	1.946
		-10	.515	.967	1.158	2.955	2.340
		-12	.570	1.122	1.447	3.705	2.772
		-16	.620	1.480	1.736	4.100	3.254
		-20	.640	1.750	2.328	4.835	3.777
		-24	.765	2.150	2.621	5.480	4.212

HOSE SIZE	"K" MIN.	"K" MAX.	"M" MAX.	"P" MAX.
-8	.810	1.092	1.560	.875
-10	1.056	1.341	1.570	1.000
-12	1.341	1.591	1.640	1.250
-16	1.665	1.840	1.750	1.500
-20	1.747	2.233	1.930	1.875
-24	1.997	2.372	2.260	2.125

User Activities: Army - Navy - Air Force - DLA - DS

Review Activities: Army - Navy - Air Force - DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 16 AUG 71 — REVISED @ 15 DEC 76 @ 30 June 1985


P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MS 8007
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 7 of 10 FSC 4720

Project No. 4720-0538

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL
COMBINATION ALUMINUM AND
CORROSION RESISTANT STEEL (275° F)

FED. SUP CLASS
4720

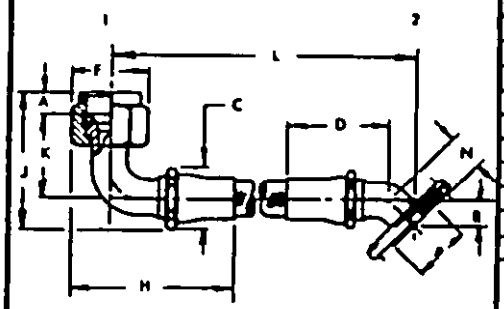

STYLE "V"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" DIM.	"C" MAX.	"D" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
90 DEG.	45 DEG.							
		-8	.438	.880	1.722	1.014	2.495	1.946
		-10	.515	.967	2.057	1.153	2.955	2.340
		-12	.570	1.122	2.368	1.447	3.705	2.772
		-16	.620	1.430	2.583	1.736	4.110	3.254
		-20	.640	1.750	2.946	2.328	4.835	3.777
		-24	.765	2.150	3.210	2.621	5.480	4.212

HOSE SIZE	"K" MIN.	"K" MAX.	"N" MAX.	"P" MAX.	"R" MIN.	"R" MAX.		
-8	.810	1.092	.606	.875	.383	.428		
-10	1.056	1.341	.658	1.000	.340	.465		
-12	1.341	1.591	.789	1.250	.433	.553		
-16	1.465	1.840	.929	1.500	.470	.657		
-20	1.747	2.233	1.020	1.844	.534	.721		
-24	1.997	2.372	1.186	2.125	.589	.186		

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CS

APPROVED 16 AUG 71 REVISED Ⓐ 15 DEC 76 Ⓑ 30 June 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MILITARY STANDARD MS 8007
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 8 of 10 FSC 4720

Project No. 4720-0538

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.


NOTES:

1. CONFIGURATION:

HOSE SIZE IN HOSE ASSEMBLIES IS DESCRIBED BY LETTER INSTEAD OF NUMBER (SEE TABLE BELOW). FOR DOUBLE ELBOW HOSE ASSEMBLIES, ANGULAR ORIENTATION BETWEEN THE ELBOWS IS EXPRESSED IN THREE DIGITS. THE ANGLE IS MEASURED IN DEGREES COUNTERCLOCKWISE FROM THE CENTERLINE OF THE NEAREST FITTING WHEN THIS FITTING IS POSITIONED AT 6 O'CLOCK TO THE CENTERLINE OF THE OTHER FITTING AS SHOWN IN THE FIGURE. IF THE DESIRED ORIENTATION IS ZERO DEGREES, SPECIFY AS 000.

LETTER DESIGNATION FOR HOSE SIZE DASH NUMBERS

HOSE ASSEMBLY SIZE	-8	-10	-12	-16	-20	-24
LETTER DESIGNATION	H	J	K	M	N	P



2. E MAX, J MAX, N MAX, AND T MAX ARE INSTALLATION DIMENSIONS AND NOT DESIGN DIMENSIONS.

3. STYLES K, M, N, P, R, S, T, U, AND V HAVE COMBINATION CRES AND ALUMINUM FITTINGS.

4. FOR "IDENTIFICATION OF PRODUCT", SEE PROCUREMENT SPECIFICATION.

THE SWIVEL NUT AND CONE SEAT SHALL MATE WITH MS33656 FITTINGS.
THE SWIVEL NUT THREADS SHALL CONFORM TO MIL-S-8879.

THE SWIVEL FLANGE SHALL CONFORM TO MS28756.

LENGTH "L" TO BE MEASURED BETWEEN CENTER OF NIPPLE AND CENTER OF FLANGE SEALING SURFACE ALONG A STRAIGHT LINE PARALLEL TO HOSE LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT.

HOSE IN ACCORDANCE WITH MIL-H-27267.

HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:

UNDER 12 INCHES LONG, NOT LESS THAN 1/8 INCH. TOLERANCE ± 1/8.
12 TO 18 INCHES LONG, NOT LESS THAN 1/4 INCH. TOLERANCE ± 1/8.
OVER 18 INCHES LONG, NOT LESS THAN 1/2 INCH.
TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES ± 1/4.
TOLERANCE FOR LENGTHS FROM 36 TO 50 INCHES ± 1/2.
TOLERANCE FOR LENGTHS OVER 50 INCHES ± 1%.

5. THE PART NUMBER SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE O.D., LENGTH, STYLE AND ANGLE BETWEEN ELBOWS, AS APPLICABLE.

MS8007H1807*030

- H = SIZE -8 OR 1/2 INCH TUBE O.D.
- 07 = LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, 07, ETC.)
- 18 = LENGTH IN EIGHTHS (1/8) OF AN INCH
- 07 = STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 THRU 8)
- * = CODE LETTER SEE BELOW
- 030 = ANGLE BETWEEN ELBOWS IN DEGREES (NOT REQUIRED FOR STYLES A, B, C, G, H, AND J)

HOSE ASSEMBLY FOR 1/2 INCH TUBE O.D., 18 INCHES IN LENGTH, 30° BETWEEN ELBOWS.

MS8007J0209*

- J = SIZE -10 OR 5/8 INCH TUBE O.D.
- 09 = LENGTH IN INCHES
- 2 = LENGTH IN EIGHTS (1/8) OF AN INCH
- 07 = STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 THRU 8)
- * = CODE LETTER SEE BELOW

HOSE ASSEMBLY FOR 5/8 INCH TUBE O.D., 9-1/4 INCHES IN LENGTH.

* ADD CODE AS FOLLOWS FOR ADDITIONAL FEATURES (IF REQUIRED)

"A" AS1072 SLEEVE, FIRE PROTECTION, SILICONE COVERED, -65°F (-54°C) THRU +500°F (+260°C) SECURED WITH CRES BANDS AS REQUIRED.
"B" AS1073 - CODE B SLEEVE, ABRASION PROTECTION, HEAT SHRINKABLE, BLACK POLYOLEFIN, -65°F (-54°C) THRU +250°F (+121°C).
"C" AS1291 - CODE A SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS WHITE TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"D" AS1291 - CODE C SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS TRANSPARENT FEP, -65°F (-54°C) THRU +350°F (+177°C) SECURED WITH CRES BANDS AS REQUIRED.
"E" AS1298 SLEEVE, HEAVY WALL CHAFE GUARD, EXTRUDED SEAMLESS BLACK TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"L" LOCKWIRE HOLE
"F" CODE A + L
"G" CODE B + L
"H" CODE C + L
"J" CODE D + L
"K" CODE E + L

APPROVED 16 AUG 71 REVISED 15 DEC 76 30 June 1983

User Activities: Army - AV, Navy - AS, Air Force - 11, DLA - CS
Review Activities: Army - AV, Navy - AS, Air Force - 11, DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Activities for all applications and for repetitive use shall be made from this document, when applicable.

Preparing Activity: AIR FORCE-11 Other Custodians: ARMY - AV, NAVY - AS	INTERNATIONAL INTEREST	TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MILITARY STANDARD MS 8007
PROCUREMENT SPECIFICATION: MIL-H-25579	SUPERSEDES:		SHEET 9 of 10 FSC 4720

Project No. 4720-0538

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

6. A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN THE ANGLE OF THE BEND OF THE END FITTING ELBOW. HOWEVER, OVALITY SHALL NOT EXCEED 7-1/2 PERCENT OF THE NOMINAL TUBING O.D. DIMENSIONS FOR THE BALL WHICH MUST PASS THROUGH THE ENTIRE LENGTH OF THE ELBOW ARE LISTED BELOW FOR THE VARIOUS SIZES AS INDICATED.

HOSE ASSEMBLY SIZE	-8	-10	-12	-16	-20	-24
BALL SIZE IN INCHES	.313	.391	.515	.750	.969	1.188

7. DIMENSIONS IN INCHES.

8. THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE THE ASBESTOS/FIBERGLASS, SHALL BE COATED WITH RTV RUBBER.

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 16 AUG 71 REVISED Ⓐ 15 DEC 76 Ⓑ 30 June 1983

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MILITARY STANDARD MS 8007
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES		SHEET 10 of 10 FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.