MIL-C-17376/2
14 September 1973
SUPERSEDING
MS39217
8 January 1969


MILITARY SPECIFICATION SHEET

CAPS AND FLANGES COMPRESSED-GAS CYLINDER:

FLANGES, LOW PRESSURE

The complete requirements for procuring the flange described herein shall consist of this document and the issue in effect of specification MIL-C-17376.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

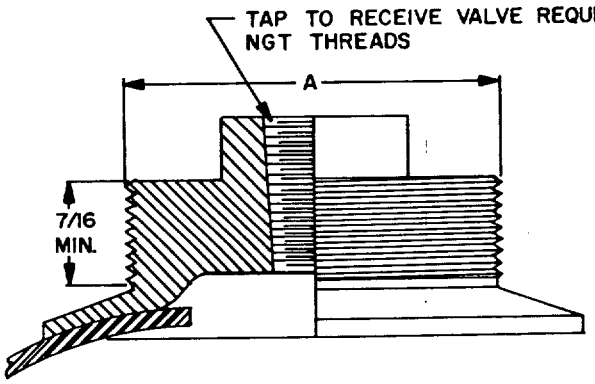


CLASSIFICATION NO.	A
C17376/2-1	3-1/8-11UNS-1
C17376/2-2	3-1/2-11UNS-1

DIMENSIONS ARE IN INCHES

FIGURE 1. FLANGE

X-2401A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:05Z
Check the source to verify that this is the current version before use.

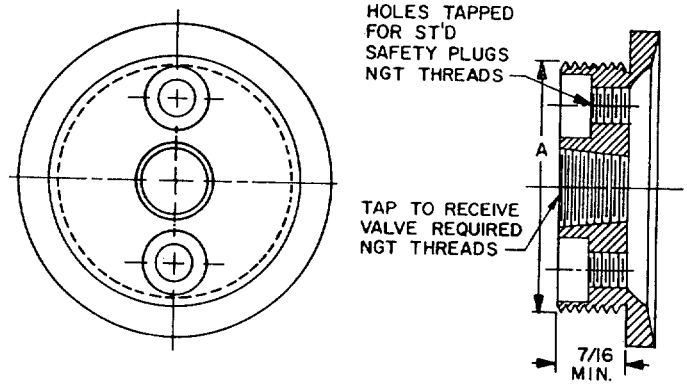

CLASSIFICATION NO.	A
C17376/2-3	3-1/8-11 UNS-1
C17376/2-4	3-1/2-11 UNS-1

DIMENSIONS ARE IN INCHES

FIGURE 2. FLANGE WITH SAFETY

X-2403A

REQUIREMENTS:

1. Material:

Steel shall have a carbon content not greater than 0.25 percent, or shall be composition AISI 5130 of FED. STD. No. 66.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:05Z
Check the source to verify that this is the current version before use.

2. Configuration and method of attaching to cylinder are representative and may be varied provided dimensions of threaded portions are as shown.

INTENDED USE:

The flanges covered by this specification sheet are intended to provide anchorage for cylinder protective caps to the shoulder of a cylinder. The flanges are attached to the cylinder by welding of similar metals and are for low pressure application. The flange provides inlet valve threads for cylinder valves and when required, threaded holes for cylinder safety devices for acetylene.

Custodians:

Army - ME
Navy - SH
Air Force - 68

Review activity:

Army - MD

User activities:

Navy - YD, CG

Preparing activity:

Army - ME

Project No. 8120-0319

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:05Z
Check the source to verify that this is the current version before use.