NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-8805/41A
6 June 1972
SUPERSEDING
MIL-S-8805/41
11 October 1965

PERFORMANCE SPECIFICATION SHEET

SWITCH, SENSITIVE, DPDT, PLUNGER, 5 AMPERES, HERMETIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.


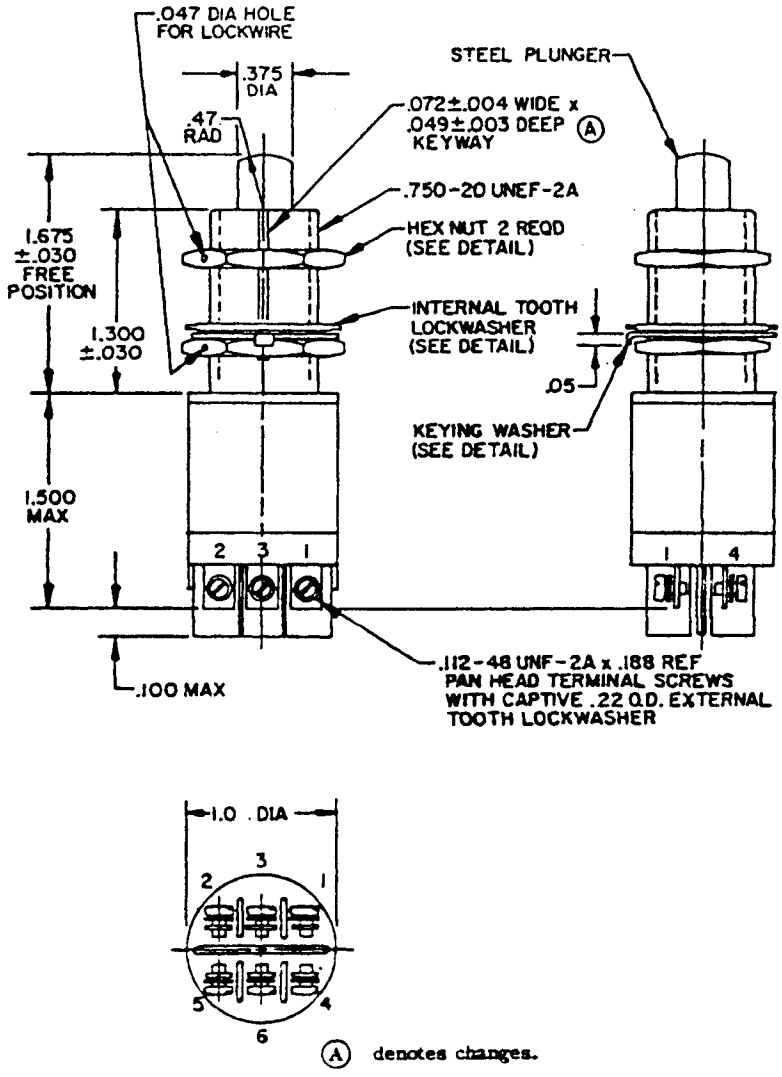


FIGURE 1. Configuration and dimensions.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.

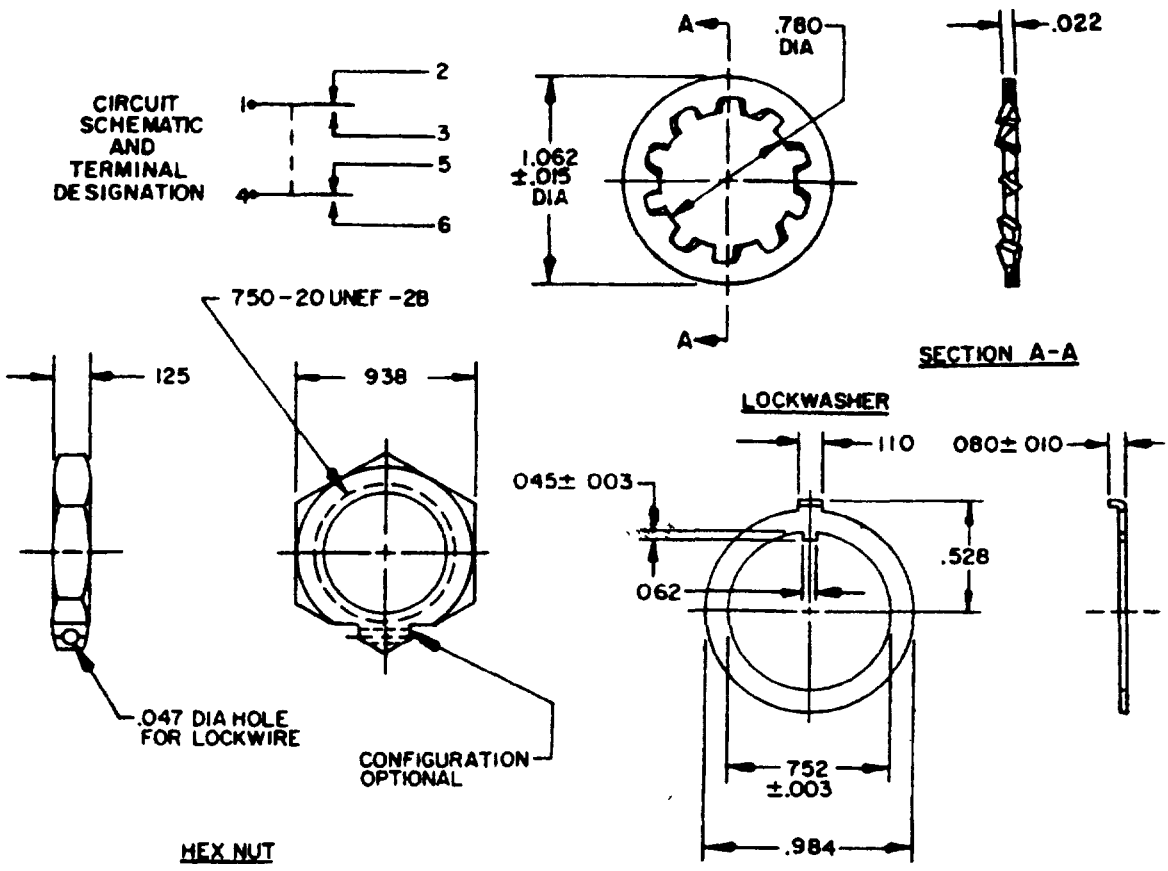

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.049	1.24	.125	3.18	.780	19.81
.004	.10	.05	1.27	.188	4.78	.938	23.83
.010	.25	.062	1.57	.22	5.59	.984	24.99
.015	.38	.072	1.83	.375	9.53	1.0	25.40
.022	.56	.080	2.08	.47	11.94	1.062	26.97
.030	.76	.100	2.54	.528	13.41	1.300	33.02
.045	1.14	.110	2.79	.750	19.05	1.500	38.10
.047	1.19	.112	2.84	.752	19.10	1.675	42.55

NOTES:
1. **Dimensions are in inches.**
2. **Unless otherwise specified, tolerance is ±.030(.76 mm) for one place decimals, ±.015 (.38 mm) for two place decimals, and ±.005(.13 mm) for three place decimals.**
3. **Exact shape of switch optional provided dimensions specified are not exceeded.**
4. **The circuit and terminal designation shall be permanently and legibly marked on switch case.**
5. **Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.**

Figure 1 (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration	See figure 1
Enclosure design:	5 (Hermetic)
Temperature characteristic.	-65° to +315° C.
Ⓐ Shock type:	M(100G).
Vibration grade	1 (10 to 500 Hz)
Weight:	4.50 ounces maximum.
Operating characteristics.	
Actuating force	9.0 ± 3.0 pounds } ± 20 percent variation
Movement differential	.015 inch maximum } from specified values
Pretravel:	.050 inch maximum } acceptable after test.
Overtravel:	.250 inch minimum }
Strength of plunger pin and pin stop:	35 pounds.
Terminal strength:	15 pounds.
Material	Hex nut, lockwasher, washer, keyway-stainless steel. Base potted with ceramic.
Contact resistance:	Not applicable.
Moisture resistance.	1 megohm.
Ⓐ Dielectric withstanding voltage	
Sea level	1,000 Vrms, 500 microampere leakage current. After electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.
Ⓐ Seal test:	Watertight test not applicable.
Mechanical endurance:	25,000 cycles.
Short circuit:	10 amperes.
Electrical endurance:	25,000 cycles
Electrical ratings:	See table I.
Quality assurance:	
Group C:	Explosion test not applicable.
Part number:	MS24594-1.

TABLE I. Electrical ratings.

Load	Sea level 28 Vdc
	(amperes)
Resistive	(amperes) 5
Inductive	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU
Navy - SH, AS, OS
Air Force - 11, 17, 80
DSA - ES

User activities:
Army -
Navy - MC
Air Force - 14, 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5930-0827-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.