INCH-POUND
MIL-PRF-8805/41D
25 May 2022
SUPERSEDING
MIL-PRF-8805/41C
20 June 2006

PERFORMANCE SPECIFICATION SHEET

SWITCHES, SENSITIVE, DPDT, PLUNGER, 5 AMPERE, HERMETIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-PRF-8805.


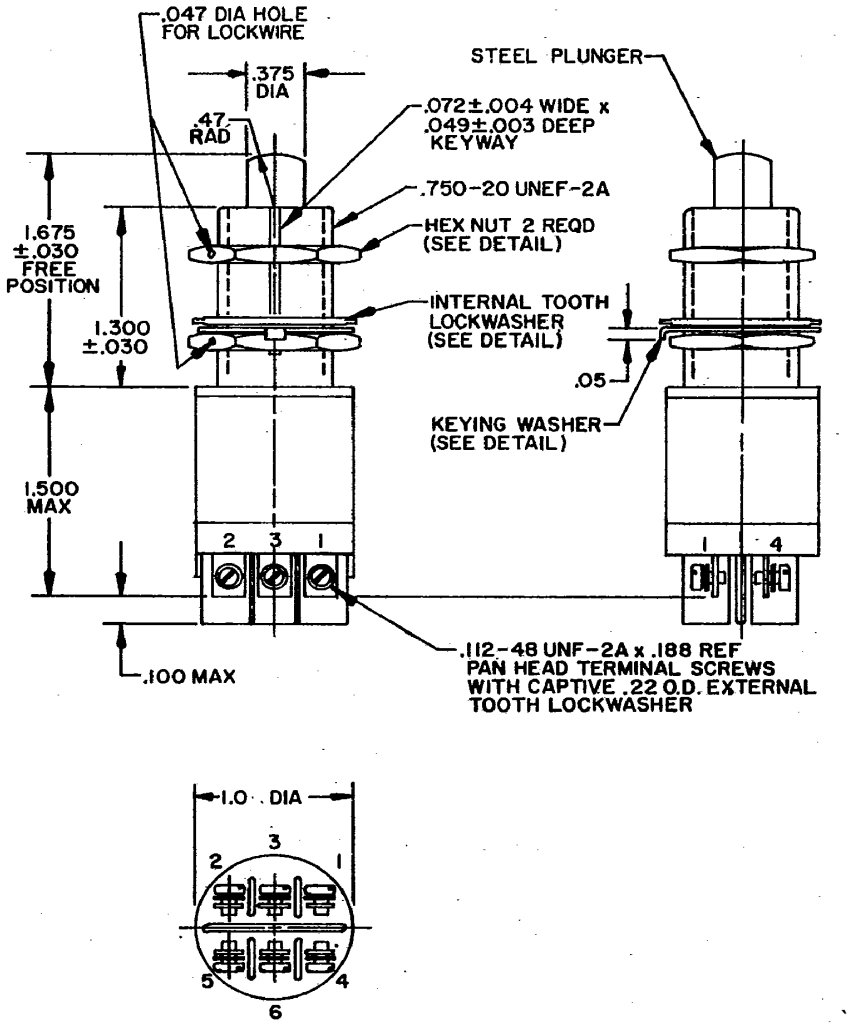


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.

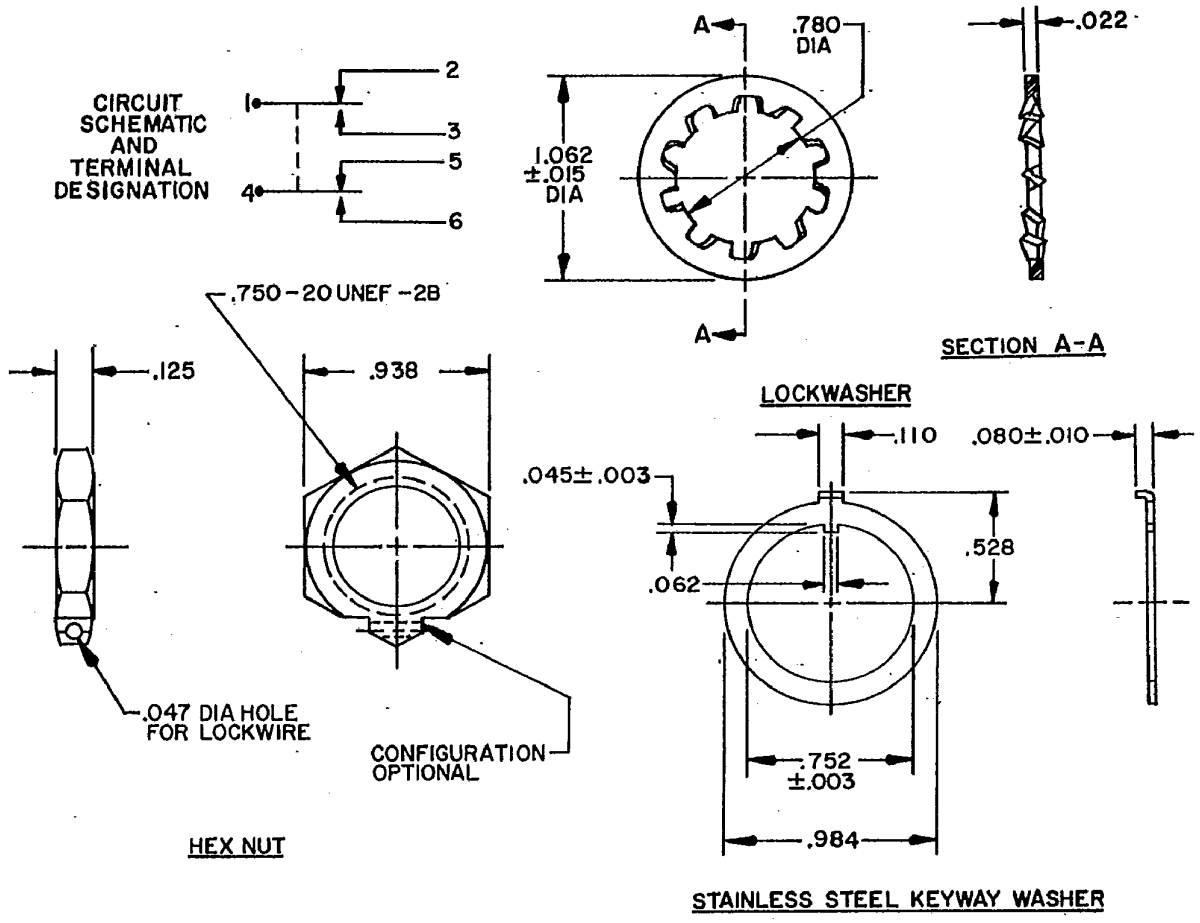

inches	mm	inches	mm	inches	mm	Inches	mm
.003	.08	.049	1.24	.125	3.18	.780	19.81
.004	.10	.05	1.27	.188	4.78	.938	23.83
.010	.25	.062	1.57	.22	5.59	.984	24.99
.015	.38	.072	1.83	.375	9.53	1.0	25.40
.022	.56	.080	2.03	.47	11.94	1.062	26.97
.030	.76	.100	2.54	.528	13.41	1.300	33.02
.045	1.14	.110	2.79	.750	19.05	1.500	38.10
.047	1.19	.112	2.84	.752	19.10	1.675	42.55

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .030 (0.76 mm) for one place decimals, .± .015 (0.38 mm) for two place decimals, and ± .005 (0.13 mm) for three place decimals.
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. The circuit and terminal designation shall be permanently and legibly marked on switch case.
5. Metric equivalents are given for general information only and are based on 1 inch = 25.4 mm..

FIGURE 1. Dimensions and configuration - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Enclosure design: 5 (Hermetic).

Temperature characteristic: 3 (-65° to +315°C).

Shock type: M (100 g).

Vibration grade: 1 (10 to 500 Hz).

Weight: 4.50 ounces maximum.

Operating characteristics: 1/
Actuating force: 9.0 ±3.0 pounds.
Pretravel: .050 inch maximum.
Movement differential: .015 inch maximum.
Overtravel: .250 inch minimum.

Strength of pin and pin stop: 35 pounds.
Terminal strength: 15 pounds

Hardware: Hex nut; lockwasher; washer, keyway-corrosion resistant metal.

Contact resistance: Not applicable.
Moisture resistance: 1 megohm.

Dielectric withstanding voltage:
Sea level: 1,000 Vrms; 500 microampere leakage current. After electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.

Seal test: Watertight test not applicable.

Mechanical endurance: 25,000 cycles.

Short circuit: 10 amperes.

Electrical endurance: 25,000 cycles.

Electrical ratings: See table I.

Quality assurance:
Group C: Explosion test not applicable.
Part or Identifying Number (PIN): MS24594-1. 2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Load	Sea level 28 V dc
	amperes
Resistive	5
Inductive	2

1/ ± 20 percent variation from specified values acceptable after test.
2/ Military Standard Drawing MS24594 is canceled and superseded by MIL-PRF-8805/41.

Referenced document
MIL-PRF-8805

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2022-047)

Review activities:
Navy – MC, SH
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.