NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-8805/44D
3 July 1974
SUPERSEDING
MIL-S-8805/44C
18 April 1972

PERFORMANCE SPECIFICATION SHEET

SWITCHES, SENSITIVE, SPDT, 5 AMPERES, RESILIENT SEAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

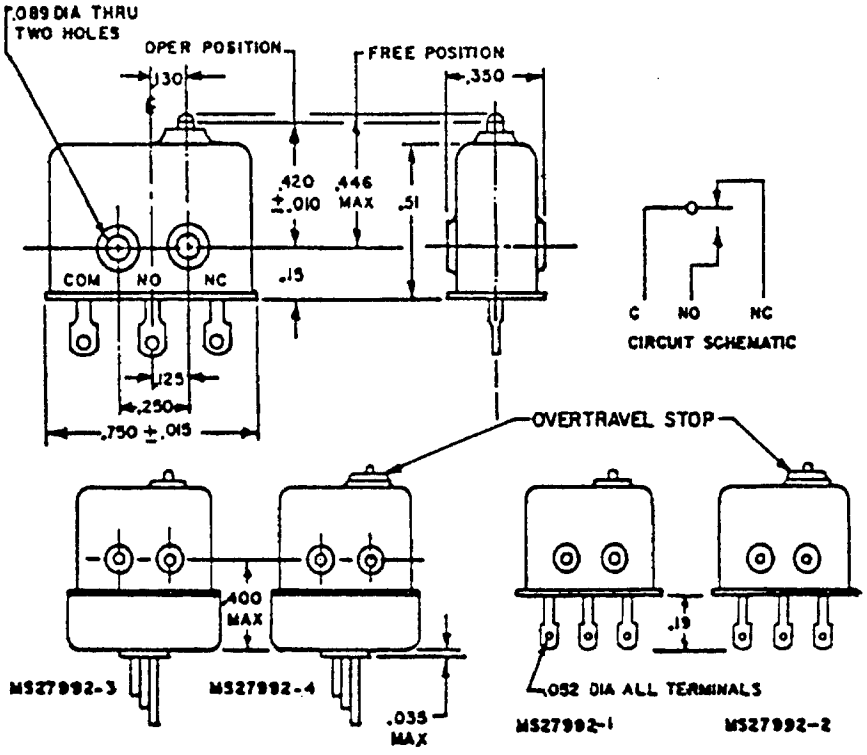

Inches	mm
.005	.13
.010	.25
.015	.38
.02	.51
.035	.89
.052	1.32
.089	2.26
.125	3.18
.130	3.30
.15	3.81
.19	4.83
.250	6.35
.350	8.89
.400	10.16
.420	10.67
.446	11.33
.51	12.95
.750	19.05

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.02 (.51 mm) for 2 place decimals and ±.005 (.13 mm) for 3 place decimals.
3. Switch configuration optional provided dimensions specified are not exceeded.
4. Insulated conductors in accordance with M5086/1-22-*, 18 inches long.
5. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch =25.4 mm.

(D) denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:	See figure.
Enclosure design:	4 (Resilient).
Temperature characteristic:	
MS27992-1:	1 (-55° to +125°C).
MS27992-2:	1 (-55° to +125°C).
MS27992-3:	1 (-55° to +85°C).
MS27992-4:	1 (-55° to +85°C).
Shock type:	M (100G, test condition I, method 213 of MIL-STD-202)
Vibration grade:	2 (10 to 2,000 Hertz (Hz)).
Operating characteristics:	See table I.
Contact resistance:	80 milliohms maximum
Dielectric withstanding voltage:	
Sea level:	1,000 Vrms.
Seal test:	Only water tight test shall be performed in group "A".
Mechanical endurance:	100,000 cycles.
Electrical endurance:	50,000 cycles.
Electrical ratings:	See table II.
Military part numbers:	See table I.
Quality assurance:	Group B inspection - See table IV.

TABLE I. Part numbers and operating characteristics.

Part number	Actuating force (D)	Releasing force	Movement differential	Over-travel	Weight	Weight with wire	Termination
MS27992-1	10oz. max.	2oz. min.	.005 inch max	.007 inch max. 1/	.02 pound max.	-	Solder
MS27992-2	10oz. max.	2oz. min.	.005 inch max	.006 inch min. .010 inch max.	.02 pound	-	Solder
MS27992-3	10oz. max.	2oz. min.	.005 inch max	.007 inch max. 1/	-	.0616 pound max.	Leadwire
MS27992-4	10oz. max.	2oz. min.	.005 inch max	.006 inch min. .010 inch max.	-	.0616 pound max	Leadwire

(D) 1/ Overtravel stop not provided. In use, do not exceed

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:09Z
Check the source to verify that this is the current version before use.

TABLE II Electrical ratings

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 400 Hz	28 Vdc
	Amperes	Amperes	Amperes
Resistive	5	5	5
Inductive	3	3	3
Lamp	1.5	1.5	1.5

Qualification:
Group submission — See table III.

TABLE III. Qualification group submission.

Examination or test	Basic test	Other switch samples	Extent of approval
Qualification inspection table of MIL-S-8805 groups I thru VIII inclusive	MS27992-2 (All sample units)	MS27992-1,-3, -4 (3 sample units) visual and mechanical inspection	All

TABLE IV Group B inspection

Examination or test	Basic switch	Other switches
Group B inspection table of MIL-S-8805 group I thru IV	MS27992-2 (All sample units)	MS27992-1,-3,-4 (3 sample units) visual and mechanical inspection

Custodians
Army - EL
Navy - EC
Air Force - 11

Review activities
Army - SL
Navy - OS, SH
Air Force - 17, 80, 85
DSA - ES

User activities:
Army - MI, AV, WC
Navy - MC, AS

Preparing activity
Navy - EC

Agent
DSA - ES

(Project 5930-0964)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:09Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department of the Navy
Washington DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:09Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:09Z
Check the source to verify that this is the current version before use.