NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-8805/46C
10 April 1979
SUPERSEDING
MIL-S-8805/46B
18 April 1972


PERFORMANCE SPECIFICATION SHEET


SWITCHES, SENSITIVE, LEAF, SPDT, HERMETIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

Inches	mm
.005	.13
.010	.25
.015	.38
.02	.51
.035	.89
.052	1.32
.089	2.26
.11	2.8
.156	3.96
.187	4.75
.203	5.16
.250	6.35
.345	8.76
.510	12.95
.542	13.77
.578	14.68
.750	19.05

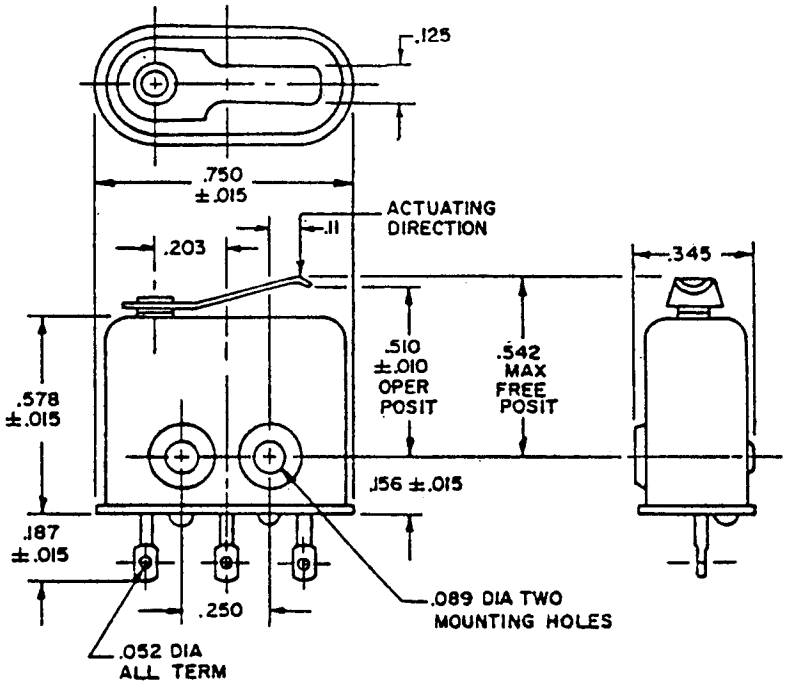



CIRCUIT SCHEMATIC

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.02 (.5 mm) for two place decimals and ±.005 (13 mm) for three place decimals.
3. Switch configuration optional provided dimensions specified are not exceeded.
4. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Configuration and dimensions.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Enclosure design: 5 (Hermetic).

Temperature characteristic:
M8805/46-001: 2 (-65°C to +125°C).
M8805/46-002: -65°C to +260°C.
M8805/46-003: -125°F to +350°F.

Shock type: M(100 G, test condition I, method 213 of MIL-STD-202).

Vibration grade: 2 (10 - 2000 Hz), except that the acceleration level shall be 30 G (M8805/46-001 and -002) or 40 G (M8805/46-003).

Weight: See table I.

Operating characteristics. See table I.

Contact resistance:
M8805/46-001 and -002: 125 milliohms maximum.
M8805/46-003: 125 milliohms maximum initial, 1.0 ohm maximum during and after life test.

Dielectric withstanding voltage:
Sea level: 1,000 Vrms.

Low level circuit (M8805/46-003 only): 15,000 cycles.

Electrical and mechanical endurance:
15,000 cycles at 10 to 12 cycles per minute.

Short circuit: 90 amperes maximum.

Electrical ratings: See table II.

Military part number: See table I.

TABLE I. Part numbers and operating characteristics.

Part number	Actuating force	Release force	Differential travel	Over travel	Maximum weight	Termination
M8805/46-001	26 oz max	6 oz min	.020 inch max	.006 inch min	.020 lb	Solder
M8805/46-002	26 oz max	6 oz min	.020 inch max	.006 inch min	.020 lb	Solder
M8805/46-003	32 oz max	6 oz min	.020 inch max	.006 inch min	.020 lb	Solder

TABLE II. Electrical ratings.

Part number	Load	Sea level and 70,000 ft 115 Vac, 400 Hz and 28 Vdc
		Amperes
M8805/46-001 and M8805/46-002	Resistive	5
	Inductive	3
	Lamp	1.5
M8805/46-003	Resistive	2
	Inductive	.5
	Lamp	.5
	Low level circuit test applicable	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:10Z
Check the source to verify that this is the current version before use.

QUALIFICATION:

Group submission: See table III.

TABLE III. Qualification testing - group submission.

Examination or test (See qualification inspection table of MIL-S-8805)	Sample	Extent of approval
Groups I, II, III, VI, VII, and VIII. Group VII tests are required at sea level only.	M8805/46-002	All part numbers
Visual and mechanical examination	M8805/46-001 3 sample units	
Group I Visual and mechanical examination Operating characteristics Group II Thermal shock Vibration Dielectric withstanding voltage Operating characteristics Group VI Mechanical endurance at high temperature not required Group VII Electrical endurance tests required at sea level only Group VIII Group X	M8805/46-003	

QUALITY ASSURANCE:

Group A inspection:
Seal: Only the watertight test shall be performed.
M8805/46-003: Do not exceed low level electrical ratings during any testing.

Group C inspection: M8805/46-002 shall be submitted to the tests of the group C inspection table of MIL-S-8805. In addition, M8805/46-003 shall be submitted to the tests of table IV.

TABLE IV. Group C inspection requirements for M8805/46-003.

Examination or test	Sample numbers											
	1	2	3	4	5	6	7	8	9	10	11	12
Thermal shock	X	X										
Low temperature operation					X							
Mechanical endurance at low temperature					X							
Contact resistance					X	X						
Overload cycling							X	X	X	X		
Inductive load, dc									X	X		
Resistive load, ac							X	X				
Low level circuit											X	X
Dielectric withstanding voltage							X	X	X	X		
Operating characteristics	X	X	X	X	X	X	X	X	X	X		
Seal	X	X	X	X								

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:10Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians.
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV, MI
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AM, AT
Navy - MC, OS, SH, AS
Air Force - 19

Preparing activity:
Navy - EC

Agent.
DLA - ES

(Project 5930-1090-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE. This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-8805/46C

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:10Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:10Z
Check the source to verify that this is the current version before use.