

MILITARY SPECIFICATION SHEET

SWITCHES, SENSITIVE, SPDT, LEVER, 25 AMPERES, HERMETIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

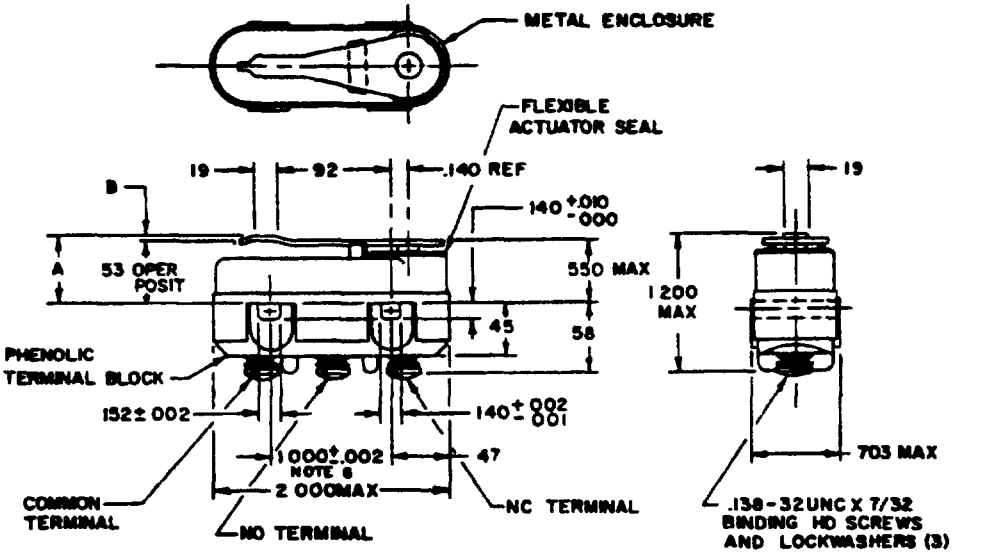

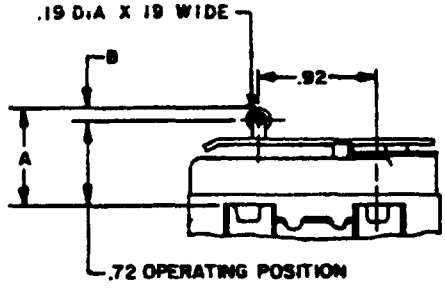

MS25011-3

INCHES	MM	INCHES	MM
.001	.03	.53	13.46
.002	.05	.550	13.97
.010	.25	.58	14.73
.140	3.56	.703	17.86
.152	3.86	.72	18.29 (E)
.19	4.83	.92	23.37
.45	11.43	1.000	25.40
.47	11.94	1.200	30.48
		2.000	50.80

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. Mark, stamp, or mold NO and NC terminal designations on adjacent area of switch
5. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
6. Mounting holes shall accept .139 (3.53 mm) maximum diameter pins or screws on 1.000 ±.002 (25.40 mm ±.05 mm) centers.

(E) denotes changes

Figure 1 Configurations and dimensions.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:	See figure 1.
Enclosure design:	5 (Hermetic).
Temperature characteristic:	1 (-55° to +85°C).
Shock type:	M (100G).
Vibration grade:	1 (10 to 500 Hz).
Weight:	.1 pound maximum.
Operating characteristics:	See table I.

TABLE I. Operating characteristics. 1/

Part number	A Maximum free position	B Maximum pretravel	Operating position	Maximum differential travel	Minimum overtravel	Actuating force	Minimum release force
	inch	inch	inch	inch	inch	oz	oz
MS25011-1 2/	.600	.065	.53	.020	.010	16 ± 8	4
MS25011-2	.610	.085	.53	.020	.010	25 ± 3	4
(E) MS25011-3	790	.065	.72	.020	.010	16 ± 6	4

1/ ±20 percent variation from specified values acceptable after test.
2/ MS25011-1 - Inactive for new design.

Short circuit:	700 amperes.
Strength of actuating means:	25 pounds minimum.
Terminal strength:	30 pounds.
Contact resistance:	Not applicable.
Dielectric withstanding voltage:	
Sea level:	1,000 vrms initial. 200 vrms after electrical endurance (Application of test potential between unconnected terminals of the same pole is not required).
Seal tests:	Only watertight test shall be performed in group A of table VII and in group I of table VI.
Mechanical endurance:	25,000 cycles at .010 inch minimum overtravel.
Electrical endurance:	10,000 cycles.
Temperature rise:	65° C.
Electrical ratings:	See table II.

TABLE II. Electrical ratings.

Load	Current capacity (amperes)		
	28 Vdc	115 Vac, 60 Hz	120 Vdc
Resistive	25	1	1
Inductive	10	1	.5

Material:	Phenolic terminal block may be type CFG in accordance with MIL-M-14.
Qualification:	
Group submission:	See table III.
Quality assurance:	
Group C:	Explosion test not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:10Z
Check the source to verify that this is the current version before use.

TABLE III. Group submission.

Examination or test	Basic switch	Other switch	Extent of approval
Qualification inspection table of MIL-S-8805 (except operating characteristics in group VI shall be tested immediately preceding short circuit, rather than as the final test).	MS25011-2 (all sample units)	MS25011-1 1/ (2 sample units) 1. Visual and mechanical examination 2. Operating characteristics	All

1/ MS25011-1 - Inactive for new design.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MU
Navy - SH
Air Force - 17, 80
DSA - ES

User activities:
Army - MI, AV
Navy - MC, AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5930-T149)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:10Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department of the Navy
Washington DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:10Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17111:102
Check the source to verify that this is the current version before use.