INCH-POUND
MIL-PRF-8805/53F
28 June 2022
SUPERSEDING
MIL-S-8805/53E
20 June 2006

PERFORMANCE SPECIFICATION SHEET

SWITCHES, SENSITIVE, 4 CIRCUIT, ROLLER-LEVER, WATERTIGHT

INACTIVE FOR NEW DESIGN AFTER 10 FEBRUARY 1971

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-PRF-8805.


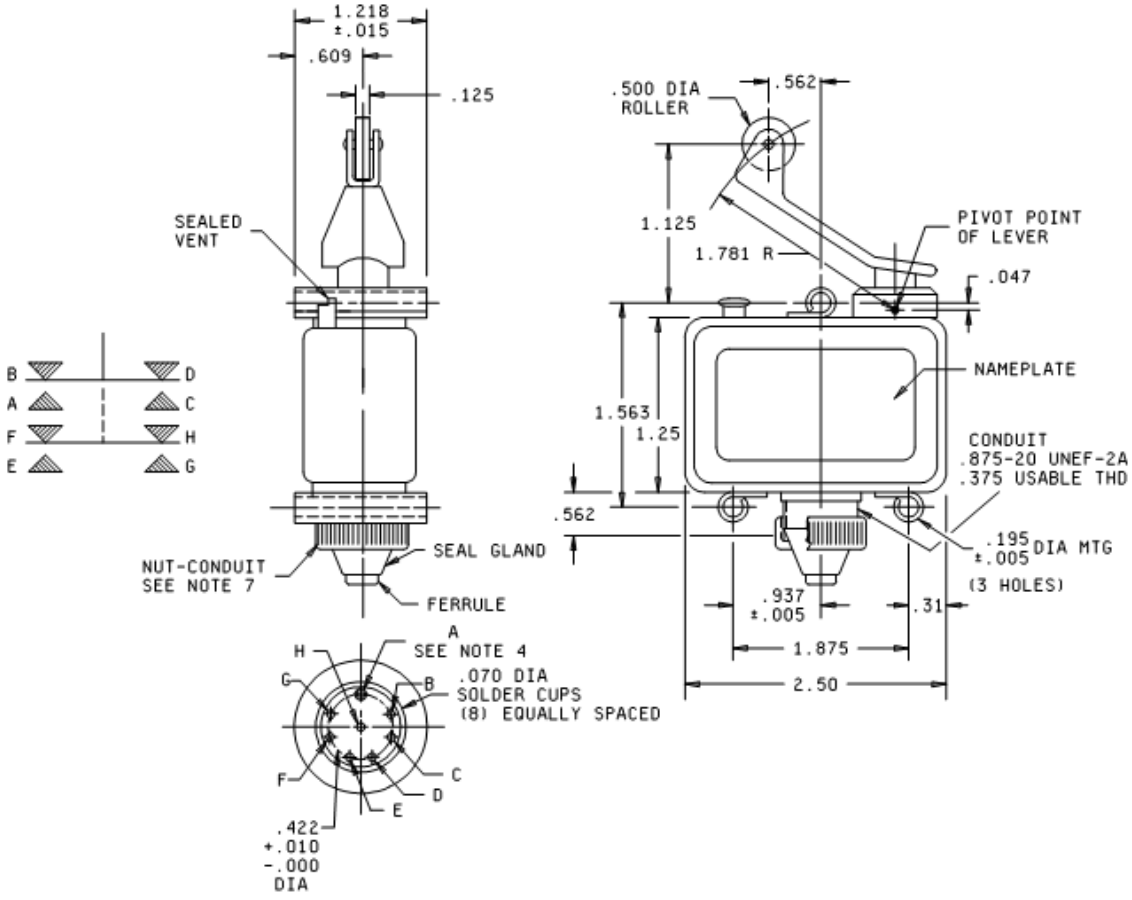


FIGURE 1. Dimensions and configuration.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:11Z
Check the source to verify that this is the current version before use.

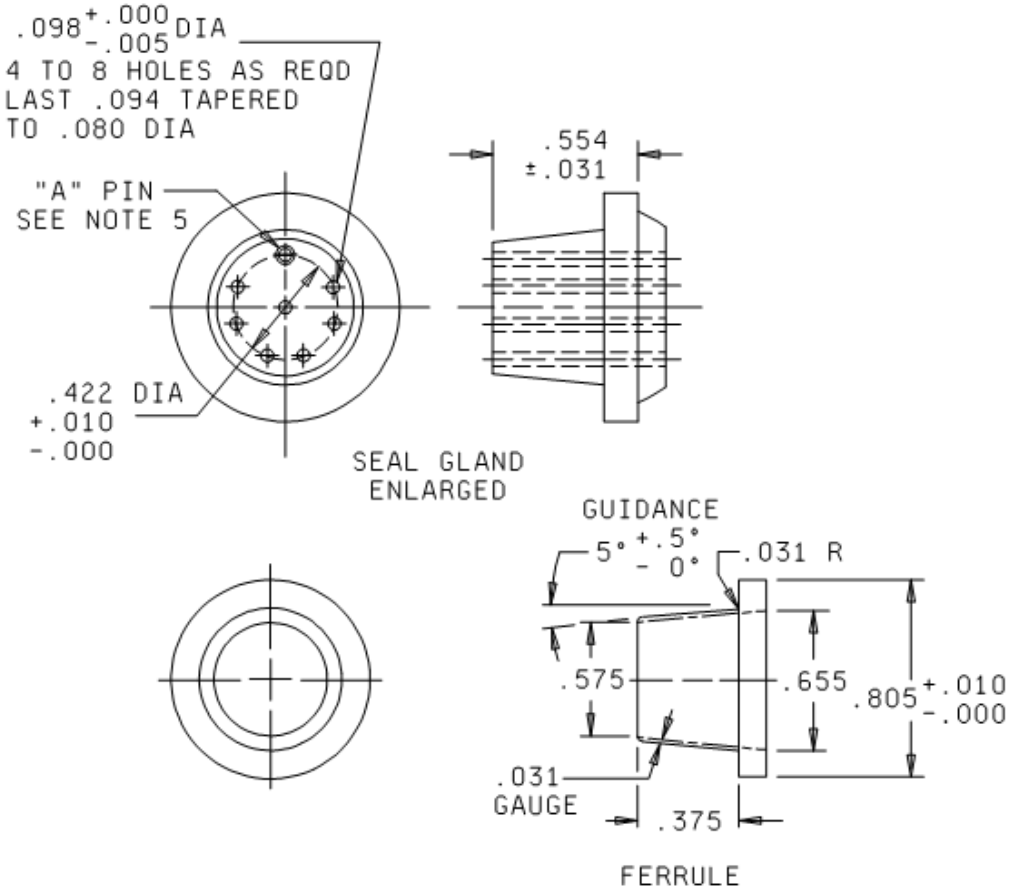

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0003	.01	.094	2.39	.500	12.70	1.125	28.58
.005	0.13	.098	2.49	.554	14.07	1.218	30.94
.010	0.25	.125	3.18	.562	14.27	1.25	31.75
.015	0.38	.193	4.90	.575	14.61	1.563	39.70
.031	0.79	.25	6.35	.609	15.47	1.781	45.24
.047	1.19	.31	7.87	.655	16.64	1.875	47.63
.070	1.78	.375	9.53	.805	20.45	2.50	63.50
.080	2.03	.422	10.72	.937	23.80		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.
4. The “A” pin shall be permanently indicated with a circle.
5. One hole on small end of gland shall be permanently marked with a circle, to be mounted on “A” pin.
6. The circuit and the terminal arrangement shall be marked on the switch case.
7. The dimensions of the electrical conduit coupling nut shall be in accordance with AN3054 or equivalent. Alternative base metals and protective finishes, as approved by the qualifying activity, may be used.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Enclosure design: 3 (watertight).

Temperature characteristic: 2 (-65° to +125°C).

Shock type: 50 g's, sawtooth, in accordance with test condition G, MIL-STD-202-213.

Vibration grade: 1 (10 to 500 Hz).

Weight: 8.25 ounces maximum.

Operating characteristics:
Actuating force: 7.5 ±2 pounds. 1/
Overtravel force: 16 ±3 pounds. 1/
Movement differential: .050 inch minimum to .100 inch maximum.
Pretravel: .090 inch to .140 inch.
Overtravel: .281 inch minimum.

Coincidence of operating and releasing points: In switches having more than one moving contact, the moving contacts shall open and close together within .010 as measured in actuator travel at the roller axis.

Material:
Ferrule: Deep drawn steel gauge number 22 (.031 inch), plated to resist corrosion.
Seal gland: Silicon rubber or equivalent.

Contact resistance: Not applicable.

Mechanical endurance: 100,000 cycles.
Electrical endurance: 100,000 cycles.

Conformance:
Group B: Not applicable.
Part or Identifying Number (PIN): MS27996-1. 2/

Electrical ratings: See table I.

_____
1/ Force specifications converted from angular to rectangular for ease of inspection.
2/ Military Standard Drawing MS27996 is canceled and superseded by MIL-PRF-8805/53.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:11Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Load	Sea level	
	28 V dc	115 V ac, 400 Hz
	amperes	amperes
Resistive	15	10
Inductive	10	10
Lamp	5	6

Referenced documents. In addition to MIL-PRF-8805, this document references the following:
MIL-STD-202-213
AN3054

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2022-054)

Review activities:
Army - AR, MI
Navy - AS, MC, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:11Z
Check the source to verify that this is the current version before use.