
MILITARY SPECIFICATION SHEET

SWITCHES, SENSITIVE, SPDT, 6 AMPERES, WATERTIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-8805.

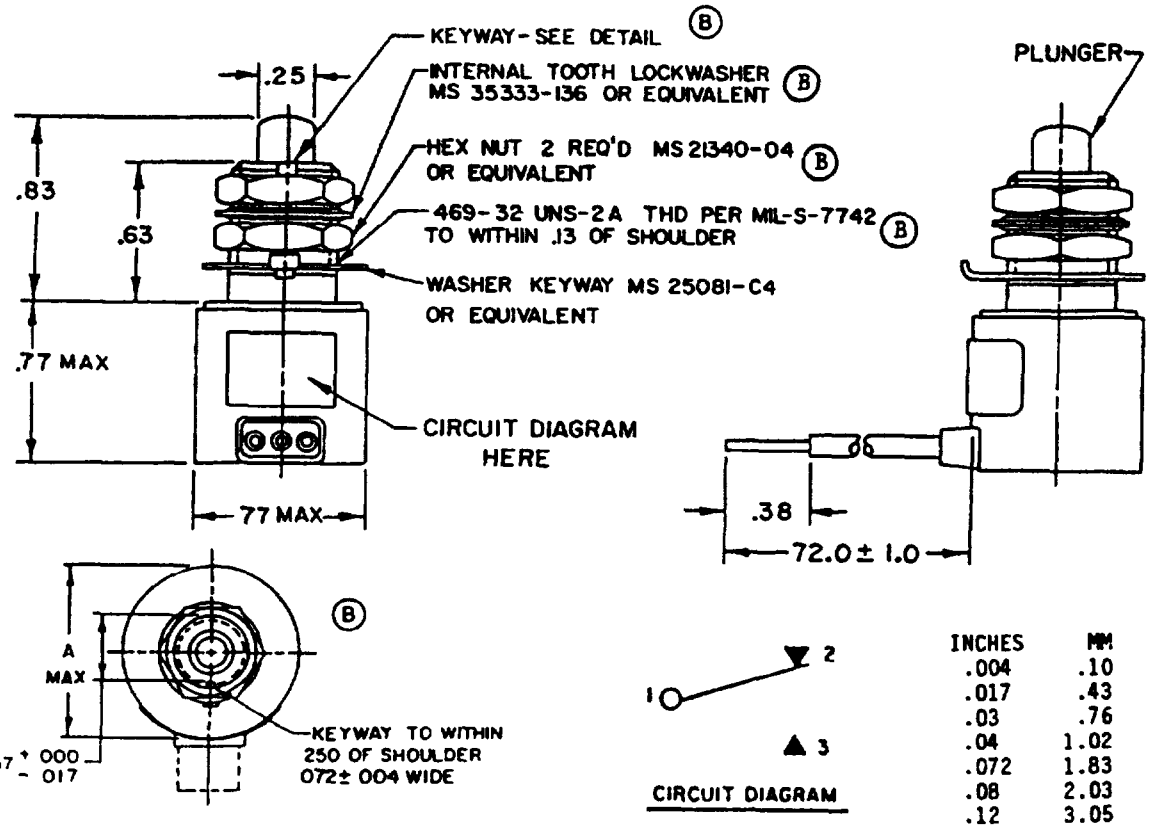

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.02 (.51 mm) for two place decimals, and ±.005 (.13 mm) for three place decimals.
3. The circuit and terminal arrangements shall be permanently and legibly marked on the switch case.
(B) 4. Lead wires in accordance with MIL-S-22759/7-20-* marked in accordance with MIL-W-5088 with the switch circuit identification number followed by wire gage number (1-20, 2-20, etc.).
5. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

INCHES	MM
.004	.10
.017	.43
.03	.76
.04	1.02
.072	1.83
.08	2.03
.12	3.05
.13	3.30
.19	4.83
.25	6.35
.38	9.65
.437	11.10
.47	11.94
.62	15.75
.63	16.00
.77	19.56
.83	21.08
1.00	25.4
72.00	1828.8

FIGURE 1. Configuration and dimensions.

(B) denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Enclosure design: 3 (Watertight).

Temperature characteristic: 2 (-65°C to +125°C).

Shock type: 50G, Method 213, test condition A, MIL-STD-202.

Vibration grade: 1 (10 to 500 Hz).

Weight: .30 pound (136.08 grams) maximum with leads.

Operating characteristics:

Actuating force: 8.50 ±3 pounds.

Release force: 4 pounds minimum.

Pretravel: .040 inch maximum.

Movement differential: .008 inch maximum.

Overtravel: .125 inch minimum.

Overtravel force: 20 pounds maximum.

Material: Internal switches may be CFG in accordance with MIL-M-14.

Finish: Switch housing shall be processed to resist corrosion.

Contact resistance: Not applicable.

Insulation resistance: 100 megohms.

Dielectric withstanding voltage:

Sea level: 1,000 V rms. In qualification inspection table after electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.

Mechanical endurance: 50,000 cycles.

Electrical endurance: 25,000 cycles.

Electrical ratings: See table I.

TABLE I. Electrical ratings.

Load	Sea level 28 V dc
	amperes
Resistive	6
Inductive	2.5
Motor	3

Part number: MS27995-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy -AS, OS .
Air Force - 11, 17, 80
DLA - ES

User activities:
Army - MI, AV, WC
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5930-1204-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, D. C. 20363

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20363

ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-8805/42B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:08Z
Check the source to verify that this is the current version before use.