INCH-POUND

MIL-S-8805/51B
16 June 1993
SUPERSEDING
MIL-S-8805/51A
10 February 1971

MILITARY SPECIFICATION SHEET

SWITCH, SENSITIVE, ROLLER-LEVER, WATERTIGHT

Inactive for new design after 10 February 1971.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-8805


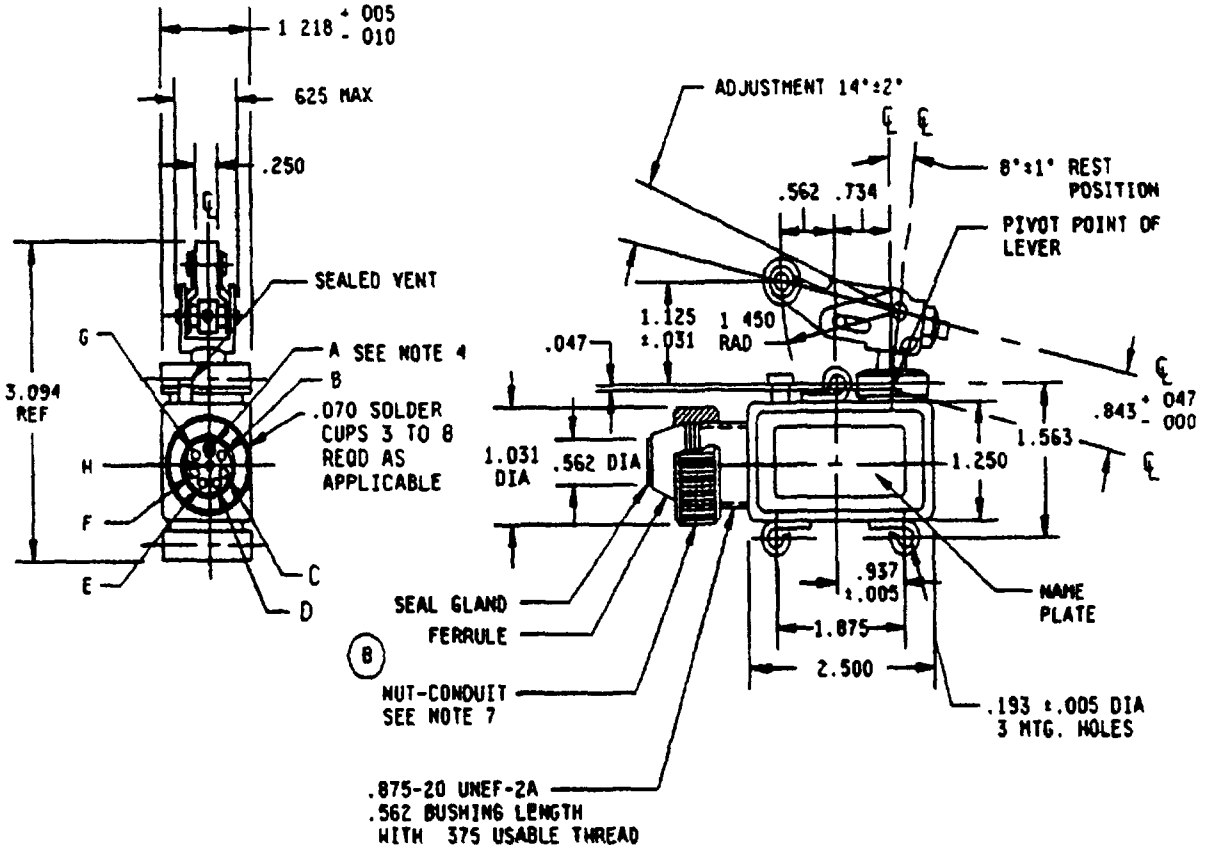


FIGURE 1 Dimensions and configuration

(B) denotes changes


DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:11Z
Check the source to verify that this is the current version before use.

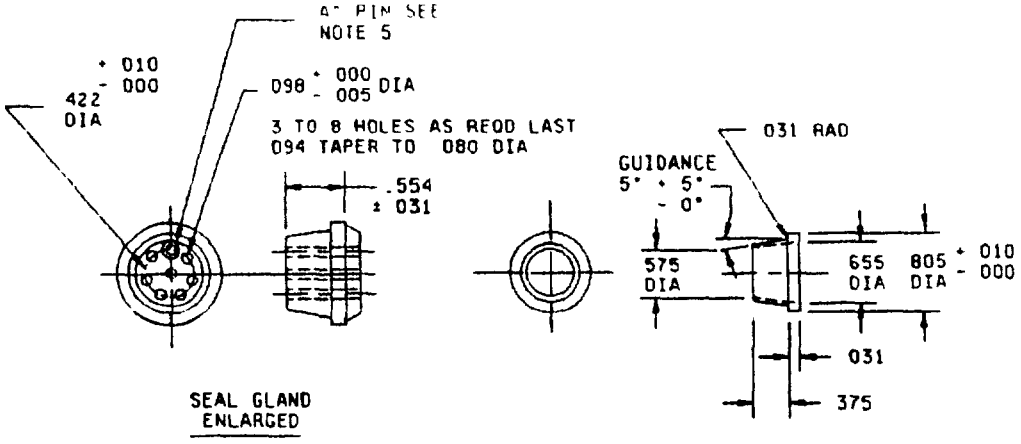

FERRULE

CONTACT ARRANGEMENT

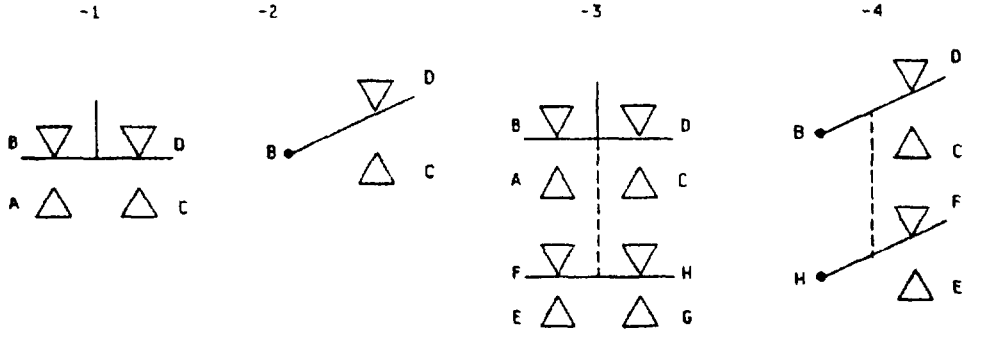

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.193	4 90	.655	16.64	1.218	30.94
.010	0.25	.250	6.35	734	18 64	1.250	31.75
.015	0.38	.375	9.53	.805	20 45	1.450	36.83
.031	0 79	422	10 72	843	21.41	1.563	39.70
.047	1.19	.554	14 07	.875	22.23	1.875	47.63
.080	2.03	.562	14.27	937	23 80	2.500	63.50
.094	2 39	.575	14.61	1.031	26.19	3.094	78.59
.098	2 49	.625	15 88	1.125	28.58		

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 015, except ±.005 for ferrule and seal gland
4. The "A" pin shall be permanently indicated with a circle.
5. One hole on small end of gland shall be permanently marked with a circle, to be mounted on "A" pin
6. The circuit and the terminal arrangement shall be marked on the switch case
(B) 7. The dimensions of the electrical conduit coupling nut shall be in accordance with AN3054-8 Alternative base metals and protective finishes, as approved by the qualifying activity, may be used

FIGURE 1 Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1.

Enclosure design 3 (watertight)

Temperature characteristic. 2 (-65°C to +125°C).

(B) Shock: 50 g's, sawtooth, in accordance with method 213, test condition G, MIL-STD-202.

Sinusoidal vibration grade: 1 (10 to 500 Hz).

Material:

(B) Ferrule: Deep drawn steel gauge number 22 (.031 inch), plated to resist corrosion.

Seal gland: Silicone rubber.

Weight. 8.25 ounces maximum

Operating characteristics:

Actuating force 4 0 +2, -0 pounds

Pretravel: .100 ± 031 inch.

Overtravel: .281 inch minimum.

Movement differential: .062 +.025, -.000 inch.

Full overtravel force 11 ±3 pounds.

Coincidence of operating and releasing points: In switches having more than one moving contact, the moving contacts shall open and close together within .010 inch of actuator travel as measured at the roller axis.

Contact resistance Not applicable

Mechanical endurance: 200,000 cycles.

(B) Electrical endurance. 100,000 cycles

Electrical ratings See table I.

TABLE I. Electrical ratings.

Load	Sea level	
	28 V dc	115 V ac, 400 Hz
	Amperes	Amperes
Resistive	15	10
Inductive	10	10
Lamp	5	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:11Z
Check the source to verify that this is the current version before use.

Qualification

Group submission See table II

(B) Quality conformance

Group B inspection. Not applicable

Part or Identifying Number (PIN). See table III.

TABLE II Qualification inspection - group submission.

Examination or test	Basic switch	Other switch samples	Extent of approval
Qualification inspection table of MIL-S-8805, groups I, II, III, V, VI, VII, and VIII	MS25314-1	MS25040-2, -3, and -4. Two sample units each, visual and mechanical examination	All

TABLE III. Part or Identifying Number (PIN)

PIN	Contact arrangement
MS25314-1	2 circuit SPDT
MS25314-2	
MS25314-3	4 circuit DPDT
MS25314-4	

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - GL, MI
Navy - AS, OS, SH
Air Force - 99
DLA - ES

User activities
Army - AR
Navy - MC
Air Force - 19

Preparing activity
Navy - EC

Agent:
DLA - ES

(Project 5930-1546)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:11Z
Check the source to verify that this is the current version before use.