TT-P-001385(GSA-FSS)
INTERIM AMENDMENT-1
February 6, 1984

INTERIM AMENDMENT

TO

INTERIM FEDERAL SPECIFICATION

PRIMER COATING, SYNTHETIC, GRAY
(FOR METAL EQUIPMENT)

This interim amendment was developed by the General Services Administration, Federal Supply and Services, Auburn, WA 98001, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this interim amendment as a valid exception to TT-P-001385, dated September 17, 1976.

PAGE 1

2.1 Under "Federal Specifications" delete "TT-E-001384" and its title.

2.2 Under American Society for Testing and Materials (ASTM) Standards: delete all test methods and substitute the following:

D 523 - Specular Gloss, Test for.
D 562 - Consistency of Paints Using the Stormer Viscosimeter, Test for.
D 609 - Preparation of Steel Panels for Testing Paint, Varnish, Lacquer, and Related Products.
D 822 - Light- and Water-exposure Apparatus (Carbon-Arc Type) for testing Paint, Varnish, Lacquer and Related Products on Test Panels.
D 1210 - Fineness of Dispersion of Pigment-Vehicle Systems, Test for.
D 1475 - Density of Paint, Varnish, Lacquer, and Related Products.
D 1640 - Drying, curing, or Film Formation of Organic Coatings at Room Temperature, Test for.
D 1644 - Nonvolatile Content of Varnishes.
D 1729 - Visual Evaluation of Color Differences of Opaque Materials.
D 1849 - Package Stability of Paint.
D 2244 - Instrumental Evaluation of Color Difference of Opaque Materials.
D 2698 - Determination of the Pigment Content of Solvent-Type Paint by High Speed Centrifuging.
D 2805 - Hiding Power of Paints.
E 260 - General Gas Chromatography Procedures.

PAGE 3

3.1.2 Delete in its entirety and substitute the following:

"3.1.2 Infrared spectrophotometric analysis. When the nonvolatile vehicle is tested as specified in 4.4.7, band positions, shapes, and relative intensities in each spectrum shall match the spectrum in Figures 1 or 2 for both Classes 1 and 2."

PAGE 4

Table I. Delete "Lead (percent by weight of total non-volatile) ----0.5----0.5".

PAGE 5

3.4.3 Delete in its entirety.

3.4.8 Delete in its entirety and substitute the following:

"3.4.8 Lifting (Class 2 only). When tested as specified in paragraph 4.4.18.2.3 the primer coating shall not lift a dry film of itself."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:58:32
Check the source to verify that this is the current version before use.

PAGE 7

Table II Index of Tests, delete and substitute:

TABLE II. Test Methods

Nonvolatile content	D 1644 2/	4.4.4	Table I
Nonvolatile vehicle	D 2698 2/	4.4.5	Table I
Pigment	D 2698 2/	4.4.6	Table I
Fineness of grind	D 1210 2/	-----	Table I
Consistency	D 562 2/	-----	Table I
Weight per gallon	D 1475 2/	-----	Table I
Dry time	D 1640 2/	4.4.8	Table I
Dry time for taping	--------	4.4.8.3	Table I
Contract ratio	2805 2/	4.4.9	Table I
Specular gloss	D 523 2/	4.4.11	Table I
Accelerated weathering	D 822 2/	4.4.11	Table I
Color	D 1729 2/	4.4.10	3.4.5
Color difference	D 2244 2/	4.4.11	Table I
Chalking	D 822 2/	4.4.11	Table I
Hardness	--------	4.4.14	Table I
Preparation of steel panels	D 609 2/	4.4.18.2.2	3.3.6.4
Preparation of tin panels	2012 1/	4.4.11, 4.4.12, 4.4.13	Table I
Flexibility	6223 1/	4.4.12	3.4.6
Spraying properties	4331 1/	4.4.18.1	3.4.4
Lifting	6252 1/	4.4.18.2.3	3.4.8
Pressure	--------	4.4.19	3.3.5.1
Spray pattern	--------	4.4.18.2.1	3.3.5.2
Spray delivery	--------	4.4.18.2.2	3.3.5.3
Condition in container	3011 1/	4.4.15	3.4.1
Storage stability	D 1849 2/	4.4.16	3.4.2
Immersion resistance	--------	4.4.13	3.4.9
Shelf storage life	--------	4.4.20	3.4.9
Infrared spectrophotometry	--------	4.4.7	3.1.2
Net contents	--------	4.4.3	Table I

1/ Federal Test Method Standard No. 141
2/ American Society for Testing and Materials (ASTM)

4.4.1, 4.4.1.1, 4.4.1.2 Delete in their entirety and substitute the following:

"4.4.1 Volatile solvent (Class 1). Analyze the solvent by gas chromatography using such options equipment and procedures as allowed by ASTM E 260. The volatile for test may be distilled from the primer coating, or the primer coating may be injected directly into the chromatograph. In either case, the equipment and procedure must be standardized with known volatiles before being used to analyze the unknown sample.

PAGE 8

4.4.4.1, Class 1. Delete "method 4044 of Federal Test Method Std. No. 141" and substitute "ASTM D 1644".

4.4.4.2, Class 2. Delete first sentence and substitute "Use ASTM D 1644 on the test concentrate".

4.4.5.1, Class 1. Delete "Method 4032 of Federal Test Method Std. No. 141" and substitute "ASTM D 2698".

4.4.5.2, Class 2. Delete "Method 4032 of Federal Test Method Std. No. 141" and substitute "ASTM D 2698".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:18Z
Check the source to verify that this is the current version before use.

PAGE 9

4.4.6.1, Class 1. Delete "Method 4022 of Federal Test Method Std. No. 141" and substitute "ASTM D 2698".

4.4.6.2, Class 2. Delete "Method 4022 of Federal Test Method Std. No. 141" and substitute "ASTM D 2698".

4.4.9.1, Class 1. Delete in its entirety and substitute the following:

"4.4.9.1 Class 1. Test in accordance with ASTM D 2805."

4.4.9.2, Class 2. Delete "Method 4121 of Federal Test Method Std. No. 141" and substitute "ASTM D 2805".

4.4.10, Color. Delete "Method 4250 of Federal Test Method Std. No. 141" and substitute "ASTM D 1729".

PAGE 10

4.4.16, Storage Stability (Class 1 only). Delete "ASTM D 154" and substitute "ASTM D 1849".

4.4.17, Delete in its entirety.

PAGE 11

4.4.18.2.3, Delete and sbustitute the following:

"4.4.18.2.3 Lifting (Class 2 only). Deposit a film of the Class 2 primer coating on a metal panel to a dry film thickness of 13 ± 2 um (0.0005 ± 0.0001 inch). Dry in a horizontal position for 24 hours at standard conditions. Spray on a second coat of Class 2 primer. Examine for lifting in accordance with Method 6252 of Federal Test Method Std. No. 141."

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:18Z
Check the source to verify that this is the current version before use.

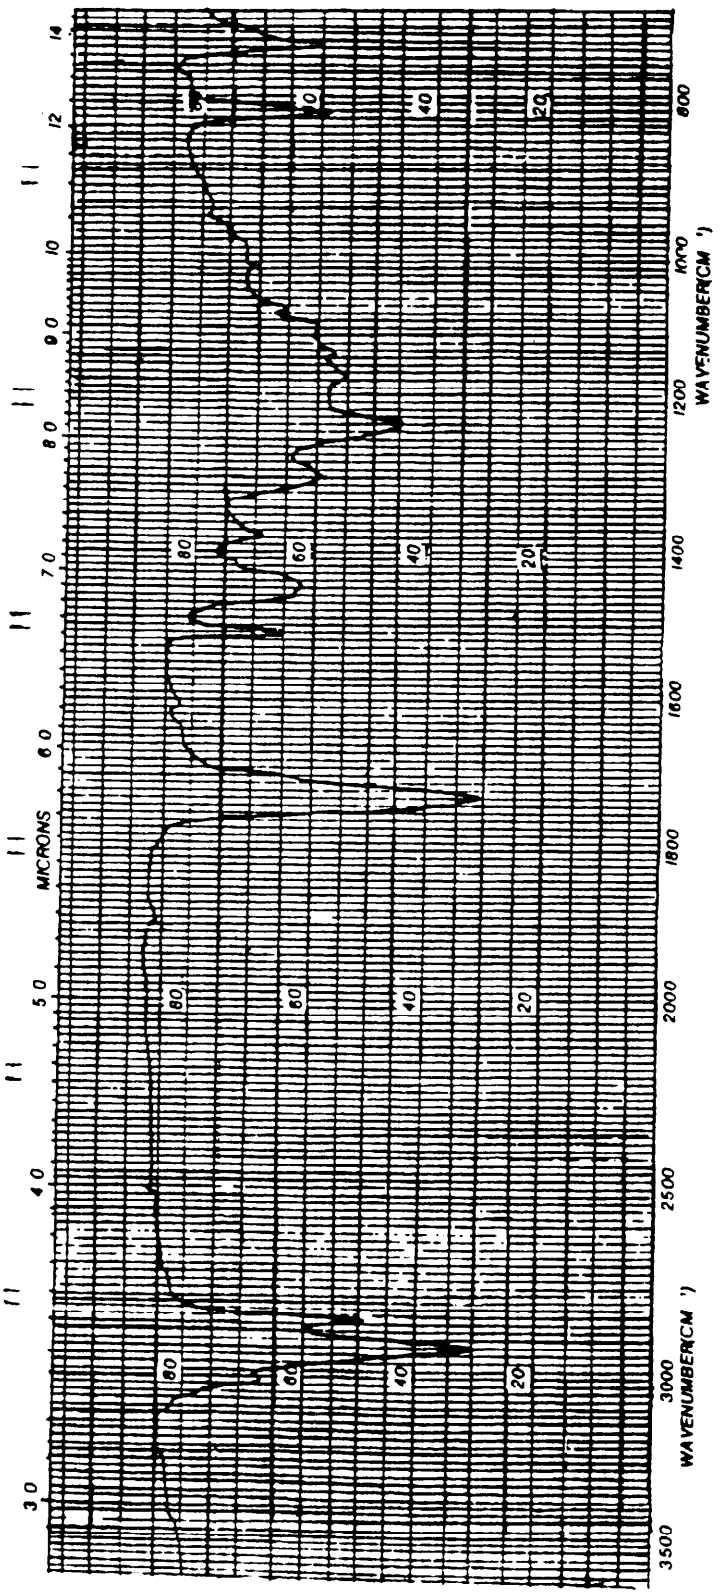


FIGURE 2. Infrared Analysis of Nonvolatile Vehicle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:18Z
Check the source to verify that this is the current version before use.