NOT MEASUREMENT SENSITIVE

MIL-DTL-62062D(AT)
4 September 1998
SUPERSEDING
MIL-PRF-62062C(AT)
12 February 1996

DETAIL SPECIFICATION

BLOWER, GENERATOR COOLING: 28 VOLT DC

This specification is approved for use by the U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of 28 volt (V) direct current (dc) blower designed for use in combination with a 300 ampere (A) generator on military tracked vehicles.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirement documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplements thereto cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 2920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

FF-B-171 - Bearings, Ball, Annular (General Purpose).

DEPARTMENT OF DEFENSE

MIL-G-23827 - Grease, Aircraft and Instrument, Gear and Actuator Screw.
MIL-C-46168 - Coating, Aliphatic Polyurethane, Chemical Agent Resistant.
MIL-P-53022 - Primer, Epoxy Coating, Corrosion Inhibiting, Lead and Chromate Free.
MIL-P-53030 - Primer Coatings, Epoxy, Water Reducible, Lead and Chromate Free.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts (see 4.4.1).
MIL-STD-461 - Requirements for the Control of Electromagnetic Interference Emissions and Susceptibility.
MIL-STD-462 - Electromagnetic Interference Characteristics Measurement of (see 4.4.1).

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

ARMY

10898759 - Blower, Electrical Rotating Equipment.

(Copies of these drawings are available from the U.S. Army Tank-automotive and Armaments Command, AMSTA-TR-E/BLUE, Warren, MI 48397-5000.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AIR MOVEMENT & CONTROL ASSOCIATION INC. (AMCA)

AMCA 210 - Laboratory Methods of Testing Fans for Rating.

(Copies of AMCA Standards may be obtained from the Air Movement & Control Association Inc., 30 W. University, Arlington Heights, IL 60004-1893.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B117 - Standard Practice for Operating Salt Spray (Fog) Testing Apparatus (DoD Adopted).
ASTM B633 - Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel (DoD Adopted).
ASTM G21 - Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi (DoD Adopted).

(Copies of ASTM Standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ANSI/ASME B1.1 - Unified Inch Screw Threads (UN and UNR Thread Form) (DoD Adopted).

(Copies of ANSI/ASME B1.1 may be obtained from the American Society of Mechanical Engineers, 345 E. 47th Street, New York, NY 10017.)

3. REQUIREMENT

3.1 First article. When specified (see 6.2), a sample shall be subjected to the first article inspection in accordance with 4.3.

3.2 Design, materials, and manufacturing. Design, materials, and manufacturing process selection shall be specified herein and in all applicable referenced specifications, standards, and drawings. Materials and components shall be fabricated and assembled into a complete blower in accordance with Drawing 10898759. Materials shall be uniform and free from imperfections or

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

defects which may affect their performance and serviceability. Asbestos and cadmium materials shall not be used in any form in any part of this blower assembly. No item, part or assembly shall contain radioactive materials in which the specific activity is greater than 0.002 microcuries per gram or activity per item equals or exceeds 0.01 microcuries.

3.2.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements and promotes economically advantageous life cycle costs.

3.2.2 Metal treatments.

3.2.2.1 Ferrous surfaces. Ferrous metal surfaces shall be cleaned and treated in accordance with the manufacturer's most effective commercial practice.

3.2.2.2 Aluminum alloy surfaces. Aluminum surfaces shall be cleaned and treated or anodized in accordance with the manufacturer's most effective commercial practice.

3.2.2.3 Zinc plated surfaces. Zinc plated surfaces shall conform to type II, class Fe/Zn 12 of ASTM B633.

3.2.2.4 Dissimilar metals. Dissimilar metals shall not be used in contact with each other. Where such contact is unavoidable, the metal shall be protected against electrolytic corrosion. When protection is used, it shall be of such type that a low impedance path is offered to radio frequency currents.

3.2.3 Threaded surfaces. All screw threads shall conform to ANSI/ASME B1.1. The thread form, class and the number of threads-per-inch shall be as specified on the referenced standards or drawings.

3.2.4 Bearings. Bearings included in blower assemblies shall meet the requirements of FF-B-171, or equivalent, together with any additional requirements specified on applicable standards or drawings. The bearings shall be lubricated with MIL-G-23827, or equivalent, grease. However, maintenance lubrication shall not be required during the service life of the blower.

3.3 Operating requirements. Each blower assembly shall provide the following functional, operational, and performance capabilities.

3.3.1 Endurance. The blower shall operate satisfactorily for 1000 continuous hours at 27 volt (V) while delivering not less than 4.2 cubic meter per minute (m^3/min) of air at 1.49 kilopascals (kPa) back pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

3.3.2 Airflow. When operating at 25 ± 3 degrees Celsius (°C) with an input voltage of 27 V direct current (dc) and an input current of not more than 14.5 ampere (A), the blower shall deliver not less than 4.2 m^3/min at 1.49 kPa back pressure.

3.3.3 Dielectric strength. The blower shall withstand a voltage of 500 V root-mean-square (rms) at 60 cycles per second (cps) for 1 minute. There shall be no puncture of solid insulation, no continuing sparkover, no breakdown of dielectric material and no damage to the insulation sufficient to cause failure of the motor.

3.4 Interface requirements. Each blower assembly shall accommodate the following requirements.

3.4.1 Electromagnetic compatibility. The blower shall meet the requirements of MIL-STD-461 limits CE102 and RE102-3, or equivalents.

3.4.2 Painting. All exterior surfaces of the blower shall be painted except the electrical connections and the mating surfaces at the blower end. Prior to painting, surfaces of the blower shall be treated in accordance with 3.2.2.1 or 3.2.2.2 and then primed per MIL-P-53022 or MIL-P-53030 or equivalents. The dry film thickness of the primer coat shall be not less than 1.0 to 1.5 mils. After priming, the exterior surfaces shall be topcoated with a coating conforming to MIL-C-46168, or an equivalent. The dry film thickness of the topcoat shall be not less than 1.8 mils.

3.4.3 Interchangeability. Blowers shall have external dimensions that fall within the envelope outline of Drawing 10898759. Electrical connectors, shafts and mounting dimensions and their locations shall conform to the detail requirements of the drawing. Military standard parts shall be used whenever possible.

3.5 Support and ownership requirements.

3.5.1 Identification marking.

3.5.1.1 Nameplate. Each blower shall have a nameplate affixed to the blower exterior as specified on the drawing (see 3.2) or, if not specified, in a conspicuous place. All nameplates shall include the following information as a minimum:

a. Blower, 28 V dc
b. Military part number
c. Federal stock number
d. Manufacturer’s identification
e. Manufacturer’s serial number
f. US

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

3.5.2 Safety. The blower assembly shall pose no electric or physical hazards to operating personnel from rotating parts, burrs or sharp edges, electrocution, etc.

3.6 Operating environment requirements. Each blower assembly shall operate under the following environmental conditions, without degradation in performance.

3.6.1 High temperature. The blower shall show no evidence of thrown solder, thrown impregnating compound, damaged insulation, raised armature windings, or raised commutator bars or other damage after storage and subsequent operation at 71 ± 3°C temperature for a 24 hour period.

3.6.2 Low temperature. The blower shall show no evidence of thrown solder, thrown impregnating compound, damaged insulation, raised armature windings, or raised commutator bars or other damage after storage and subsequent operation at -18 ± 3°C temperature for a 24 hour period.

3.6.3 Vibration. The blower shall show no loosening of parts, objectionable operating characteristics, noise, wear, physical distortion or failure of components during and after exposure to simple harmonic motion having an amplitude of 0.03 inch in the frequency range of 10 to 55 Hertz (Hz) to 10 Hz with a sweep time of 1 minute. After being subjected to the vibration, the blower shall meet the requirements of 3.3.2.

3.6.4 Shock. The blower shall show no change in physical, electrical, or material characteristics after exposure to a sawtooth shock pulse of 30 gravity units (g) for 11 milliseconds (ms). After being subjected to the shock, the blower shall meet the requirements of 3.3.2.

3.6.5 Sand and dust. After exposure to fine dust (up to 150 microns in size) blown at 762 ± 152 meters per minute (m/min) for a 24 hour period, the blower shall meet the requirements of 3.3.2.

3.6.6 Corrosion resistance. The blower shall evidence no damage affecting its operation and shall meet the requirements of 3.3.2 after exposure to salt spray consisting of 5 ± 1 parts per mass of sodium chloride dissolved in 95 parts of water for 200 hours.

3.6.7 Fungus resistance. After a continuous 90 day exposure to spore inoculation, the blower shall show no evidence of microbial growth that would adversely affect its performance and shall subsequently meet the requirements of 3.3.2.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

a. First article inspection (see 4.2).
   1. Preproduction inspection (see 4.2.1).
   2. Initial production inspection (see 4.2.2).
b. Conformance inspection (see 4.3).
   1. Examinations (see 4.3.2).
   2. Acceptance tests (see 4.3.3).

4.2 First article inspection. Unless otherwise specified (see 6.2), first article inspection shall be performed on preproduction or initial production samples as specified herein.

4.2.1 Preproduction inspection. When specified (see 6.2), the preproduction sample shall consist of four blowers. Preproduction inspection shall consists of the inspections specified in table I and in the order specified in table II.

Table I. Verification methods.

Title	Requirement	Verification	First article				Conformance	
			Sample unit				Examination	Acceptance test
			1	2	3	4		
Materials, design, and construction	3.2 through 3.2.4	4.4.3	X	X	X	X		
Operating requirements	3.3	4.4.4						
Endurance	3.3.1	4.4.4.1	X					X
Airflow	3.3.2	4.4.4.2	X					X
Dielectric strength	3.3.3	4.4.4.3	X		X	X	X	
Interface requirements	3.4	4.4.5						
Electromagnetic compatibility	3.4.1	4.4.5.1		X				X
Painting	3.4.2	4.4.5.2	X	X	X	X		
Interchangeability	3.4.3	4.4.5.3	X	X	X	X		
Support and ownership requirements	3.5	4.4.6						
Identification marking	3.5.1	4.4.6.1	X	X	X	X		
Safety	3.5.2	4.4.6.2	X	X	X	X		
Operating environment requirements	3.6	4.4.7						
High temperature	3.6.1	4.4.7.1	X		X	X		X
Low temperature	3.6.2	4.4.7.2	X			X		X
Vibration	3.6.3	4.4.7.3	X			X	X	
Shock	3.6.4	4.4.7.4	X			X	X	
Sand & dust	3.6.5	4.4.7.5				X		X
Corrosion resistance	3.6.6	4.4.7.6						X
Fungus resistance	3.6.7	4.4.7.7			X			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

Table II. Order of preproduction.

Sample	Verification	Title
1	4.4.4.3	Dielectric strength
	4.4.7.1	High temperature
	4.4.7.2	Low temperature
	4.4.7.3	Vibration
	4.4.7.4	Shock
	4.4.4.1	Endurance
	4.4.4.2	Airflow
2	4.4.5.1	Electromagnetic compatibility
3	4.4.4.3	Dielectric strength
	4.4.7.1	High temperature
	4.4.7.7	Fungus resistance
4	4.4.4.3	Dielectric strength
	4.4.7.2	Low temperature
	4.4.7.3	Vibration
	4.4.7.6	Corrosion resistance
	4.4.7.4	Shock
	4.4.7.5	Sand & dust

4.2.2 Initial production inspection. Unless otherwise specified (see 6.2), the Government shall select four blowers produced under the production contract for initial production inspection. Initial production inspection shall consist of the inspections specified in table I and in the order specified in table III.

Table III. Order of initial production.

Verification	Title
4.4.4.3	Dielectric strength
4.4.7.1	High temperature
4.4.7.2	Low temperature
4.4.7.3	Vibration
4.4.7.4	Shock
4.4.4.1	Endurance
4.4.4.2	Airflow

4.3 Conformance inspection. Conformance inspection shall include the examinations of 4.3.2 and the tests of 4.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

4.3.1 Sampling. Sampling shall be as specified in the contract or order(see 6.2).

4.3.2 Examination. Each blower selected in accordance with 4.3.1 shall be subjected to the examinations specified in table I. Failure of any examination shall be cause for rejection.

4.3.3 Acceptance tests. Each blower selected in accordance with 4.3.1 shall be subjected to the tests specified in table I. Failure of the test shall be cause for rejection.

4.4 Verification methods. The types of verification methods included in this section are visual, inspection, measurement, sample tests, full-scale demonstration tests, simulation, modeling, engineering evaluation, component properties analysis, and similarity to previously-approved or previously-qualified designs.

4.4.1 Verification alternatives. The manufacturer may propose alternative test methods, techniques, or equipment, including the application of statistical process control, tool control, or cost-effective sampling procedures, to verify performance. See the contract for alternatives the replace verifications required by this specification.

4.4.2 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be conducted under the following conditions:

a. Air temperature: 23 ± 10°C.
b. Barometric pressure: 725 (+50, -75) millimeters of mercury (Hg).
c. Relative humidity: 50 ± 30 percent.

4.4.3 Design, materials, and manufacturing. Conformance to 3.2 through 3.2.4 shall be determined by inspection of contractor records providing proof or certification that design, construction, processing and materials conform to requirements. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, test reports, and rating data.

4.4.4 Operating requirements verification.

4.4.4.1 Endurance. To determine conformance to 3.3.1, the blower shall be subjected to continuous operation through the following test sequence:

a. 700 hours at 25 ± 3°C ambient temperature, 27 V input, motor axis horizontal.
b. 150 hours at 25 ± 3°C ambient temperature, 27 V input, motor axis 45 degrees, commutator down.
c. 150 hours at 25 ± 3°C ambient temperature, 27 V input, motor axis 45 degrees, commutator up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

4.4.4.2 Airflow. To determine conformance to 3.3.2, the blower shall be subjected to and pass the applicable airflow test procedures of AMCA 210.

4.4.4.3 Dielectric strength. To determine conformance to 3.3.3, the potential shall be applied to the armature and field terminals with the ground brush raised off the commutator and with the field ground disconnected. Capacitors incorporated in the motor circuit shall be disconnected during the test. Disassembly shall be required for ungrounding and examination. After the examination, the blower shall be reassembled and subjected to testing as specified in 4.4.4.2.

4.4.5 Interface requirements verification.

4.4.5.1 Electromagnetic compatibility. To determine conformance to 3.4.1, the blower shall be tested and pass the test in accordance with MIL-STD-462D, or equivalent.

4.4.5.2 Painting. The finish applied to the blower assembly shall be visually inspected for conformance to this specification.

4.4.5.3 Interchangeability. The interchangeability between different parts and assemblies having the same military part number shall be demonstrated using one or more of the methods outlined in 4.4 or 4.4.1.

4.4.6 Support and ownership requirements verification.

4.4.6.1 Identification marking. The presence of the identification marking required in this specification shall be visually inspected (see table IV).

4.4.6.2 Safety. The blower shall be visually inspected for hazardous burrs, sharp edges, foreign materials, or other imperfections that pose physical danger to an installer/operator. The assembly shall be inspected for exposed, frayed, unsecured, or otherwise improperly protected circuits that pose electrical danger to the installer/operator.

4.4.7 Operating environment requirements verification.

4.4.7.1 High temperature. To determine conformance to 3.6.1, the blower shall be stored in a test chamber at 71 $\pm$ 3°C for a period of 24 hours. The blower shall then be operated for a period of 4 hours at the 71 $\pm$ 3°C temperature. During operation the voltage input to the blower shall be between 27 and 29 V with the input to the blower at not more than 14.5 A.

4.4.7.2 Low temperature. To determine conformance to 3.6.2, the blower shall be stored in a test chamber at -18 $\pm$ 3°C for a period of 24 hours. The blower shall then be operated for a

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

period of 4 hours at the -18 ± 3°C temperature. During operation the voltage input to the blower shall be between 27 and 29 V with the input to the blower at not more than 14.5 A.

4.4.7.3 Vibration. To determine conformance to 3.6.3, the blower shall be mounted rigidly along any of the principal axes using a mounting apparatus which is free from resonances over the test frequency range. The blower shall be subjected to a simple harmonic motion having an amplitude of 0.03 inch (0.06-inch maximum total excursion), the frequency being varied uniformly between the approximate limits of 10 and 55 Hz. The entire frequency range, from 10 to 55 Hz and return to 10 Hz, shall be traversed in approximately 1 minute. This motion shall be applied for a period of 24 hours in each of 3 mutually perpendicular directions (total 72 hours). During the latter 1/2 hour of each 2 hour period of vibration, the blower shall be operated continuously at full load speed. Full load speed shall be obtained by adjustment of the line voltage to 28.5 V.

4.4.7.4 Shock. To determine conformance to 3.6.4, the blower shall be subjected to a sawtooth waveform shock pulse with a 30 g peak value and a duration of 11 ms. The waveform shall conform to figure 1. The velocity change (Vi) shall be 1.62 m/sec. After having been subjected to and passing the test specified in 4.4.4.2, the blower shall be disassembled and examined to determine conformance to 3.6.1 through 3.6.4.

4.4.7.5 Sand and dust. To determine conformance to 3.6.5, the blower shall be subjected to and pass the test as specified in method 110A of MIL-STD-202, or equivalent, except that chamber air speed shall be 762 ± 152 m/min.

4.4.7.6 Corrosion resistance. To determine conformance to 3.6.6, the blower shall be tested and pass the test in accordance with the salt spray test as specified in ASTM B117, except that the length of the test shall be 200 hours. After the corrosion test, the blower shall be operated for 1 hour at 27 V before being subjected to and passing the test specified in 4.4.4.2.


4.4.7.7 Fungus resistance. To determine conformance to 3.6.7, the blower shall be tested in accordance with ASTM G21 except that the test period shall be a continuous 90 days. The blower shall be removed from the test cabinet without disassembly and without disturbing any fungus growths that have developed. Upon completion of the examination and replacement of access port covers, the blower shall be operated for 1 hour at 27 V before being subjected to and passing the test specified in 4.4.4.2.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

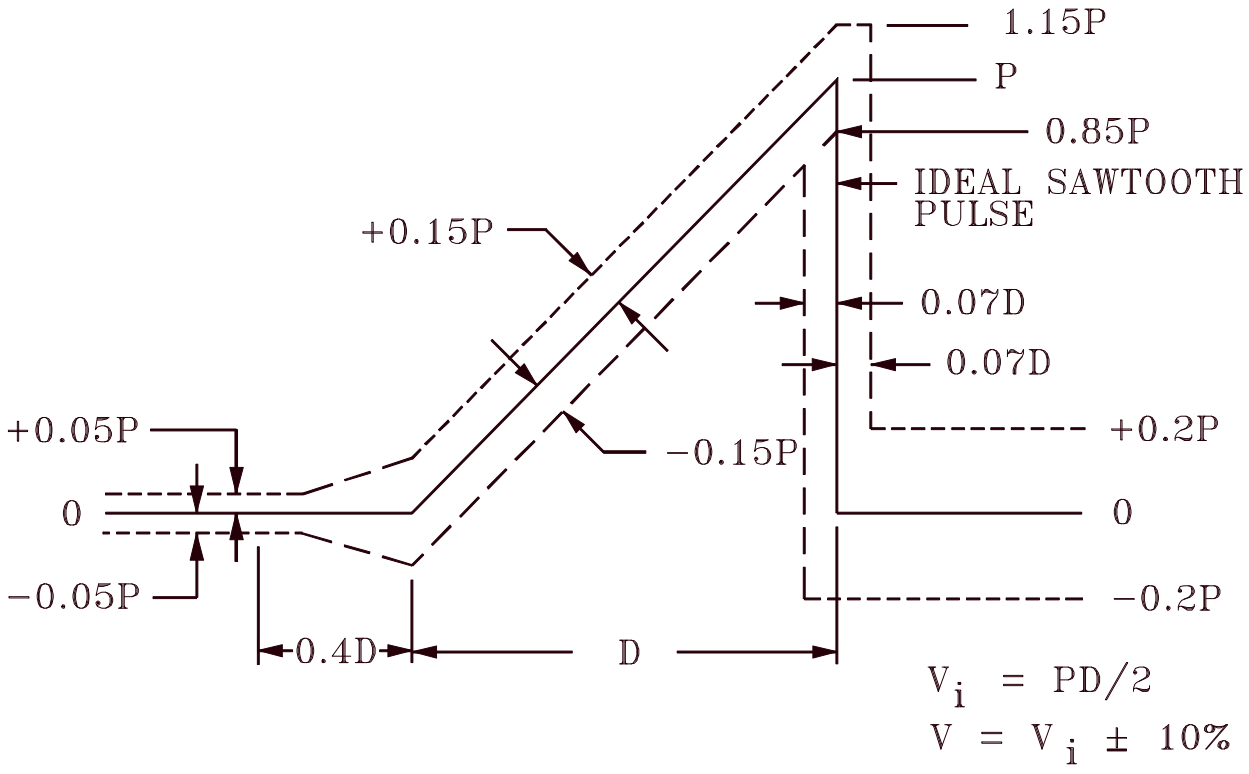

NOTE:
The oscillogram should include a time about 3D long with the pulse approximately in the center. The integration to determine the velocity change should extend from 0.4D before the pulse to 0.1D beyond the pulse. The peak acceleration magnitude of the sawtooth pulse is P and its duration is D. Any measured acceleration pulse which can be contained between the broken line boundaries is a nominal terminal-peak sawtooth pulse of nominal peak value, P, and nominal duration, D. The velocity-change associated with the measured acceleration pulse is V.

FIGURE 1. Tolerances for terminal-peak sawtooth shock pulse.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

6.1 Intended use. Blowers covered by this specification are intended for use in combination with basic generator Drawing 10898795 and varying duct configurations on the M88 vehicle (see Drawing 10889998) and the M60A1 tank (see Drawing 10889713). The blower is considered military unique as it must withstand extreme environmental conditions exceeding those designed for commercial use such as shock, vibration, and endurance capabilities.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.3).
c. When first article inspection is required (see 3.1 and 4.2).
d. Title, number, and date of drawing, if other than as specified (see 3.2).
e. If preproduction inspection is required (see 4.2.1).
f. If initial production inspection is not required (see 4.2.2).
g. If preproduction inspection sample size should be other than as specified (see 4.3.1).
h. If inspection conditions are other than specified (see 4.4.2).
i. Packaging requirements (see 5.1).

6.3 Definitions.

6.3.1 Recovered materials. Materials that have been collected or recovered from solid waste.

6.3.2 Solid waste. (a) Any garbage, refuse, or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial commercial, mining, and agricultural operations, and from community activities. It does not include solid or dissolved material in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under byproduct material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.) (Source: Federal Acquisition Regulations, section 23.402).

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Airflow
Corrosion resistance
Dielectric strength
Electromagnetic compatibility
Fungus resistance
Interchangeability

Custodian:
Army - AT

Preparing Activity:
Army - AT

Review Activity:
DLA - CC

(Project 2920-0494)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE *(YYMMDD)*
	MIL-DTL-62062D(AT)	980904

3. DOCUMENT TITLE

BLOWER, GENERATOR COOLING: 28 VOLT DC

4. NATURE OF CHANGE ***(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)***

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON
c. ADDRESS *(Include Zip Code)* Commander U.S. Army Tank-automotive and Armaments Command ATTN: AMSTA-TR-E/BLUE Warren, MI 48397-5000	(810) 574-8745 786-8745 IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:12Z
Check the source to verify that this is the current version before use.