INCH-POUND

MIL-T-55155/24C

19 March 1990

SUPERSEDING
MIL-T-55155/24B
27 November 1981

MILITARY SPECIFICATION SHEET

TERMINALS, STUD (NONINSULATED), STYLE SE24

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-55155

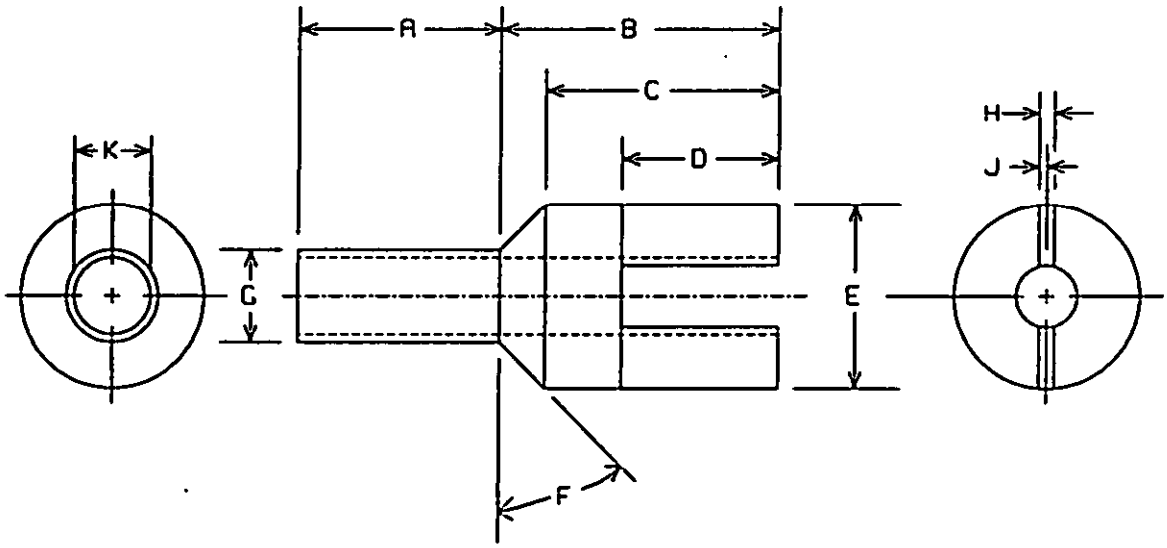


FIGURE 1. CONFIGURATION AND DIMENSIONS.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:30Z
Check the source to verify that this is the current version before use.

PART 1/ NUMBER	DIMENSIONS										Mounting board thickness ±.005 (REF)
	A ±.005	B	C	D	E	F	G ±.002	H	J	K	
M55155/24X-01	.062	.188	.156	.093	.125	45°	.060	.029	.015	.042 DIA. MAX RUNOUT .003 TIR	.031
M55155/24X-02	.094										.062
M55155/24X-03	.125										.094
M55155/24X-04	.156										.125
M55155/24X-05	.037	.125	---	.094	.094	---	.063 +.000 -.005	.025	---	.043 DIA. ±.010	.016
M55155/24X-06	.053										.031
M55155/24X-07	.084										.062
M55155/24X-08	.115										.094
M55155/24X-09	.147										.125
M55155/24X-10	.037	.125	---	.031	.062	---	.042 +.000 -.005	.016	.008	.026 DIA. ±.010	.016
M55155/24X-11	.053										.031
M55155/24X-12	.084										.062
M55155/24X-13	.115										.094
M55155/24X-14	.147										.125
M55155/24X-15	.053	.070	---	.050	.047	---	.032 +.000 -.005	.020	---	.020 DIA. ±.010	.031
M55155/24X-16	.084										.062
M55155/24X-17	.115										.094

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .005 inch for item numbers -01 through -04 and ±.010 inch for item numbers -05 through -17 on decimals and ±3° on angles.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
Dimensions and configuration: See figure 1.
Type of mounting: Swage.

TABLE 1. Substitutability data.

Part number in MIL-T-55155/24C 1/	Part number in MIL-T-55155/24B
M55155/24X-01	SE24XC01
M55155/24X-02	SE24XC02
M55155/24X-03	SE24XC03
M55155/24X-04	SE24XC04
M55155/24X-05	SE24XC05
M55155/24X-06	SE24XC06
M55155/24X-07	SE24XC07
M55155/24X-08	SE24XC08
M55155/24X-09	SE24XC09
M55155/24X-10	SE24XC10
M55155/24X-11	SE24XC11
M55155/24X-12	SE24XC12
M55155/24X-13	SE24XC13
M55155/24X-14	SE24XC14
M55155/24X-15	SE24XC15
M55155/24X-16	SE24XC16
M55155/24X-17	SE24XC17

1/ The complete part number shall include the symbol for the conductor material and finish.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Preparing activity:
Army - ER

(Project 5940-1099-24)

Review activities:
Army - MI
Navy -
Air Force -
DLA-GS

User activities:
Army - AT
Navy - MC
Air Force -

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.