INCH-POUND

MIL-T-55164/23C

21 November 1988

SUPERSEDING

MIL-T-55164/23B

24 September 1976

MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER STUD TYPE, CLASS 25TB

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the terminal board described herein shall consist of this specification and the latest issue of MIL-T-55164.

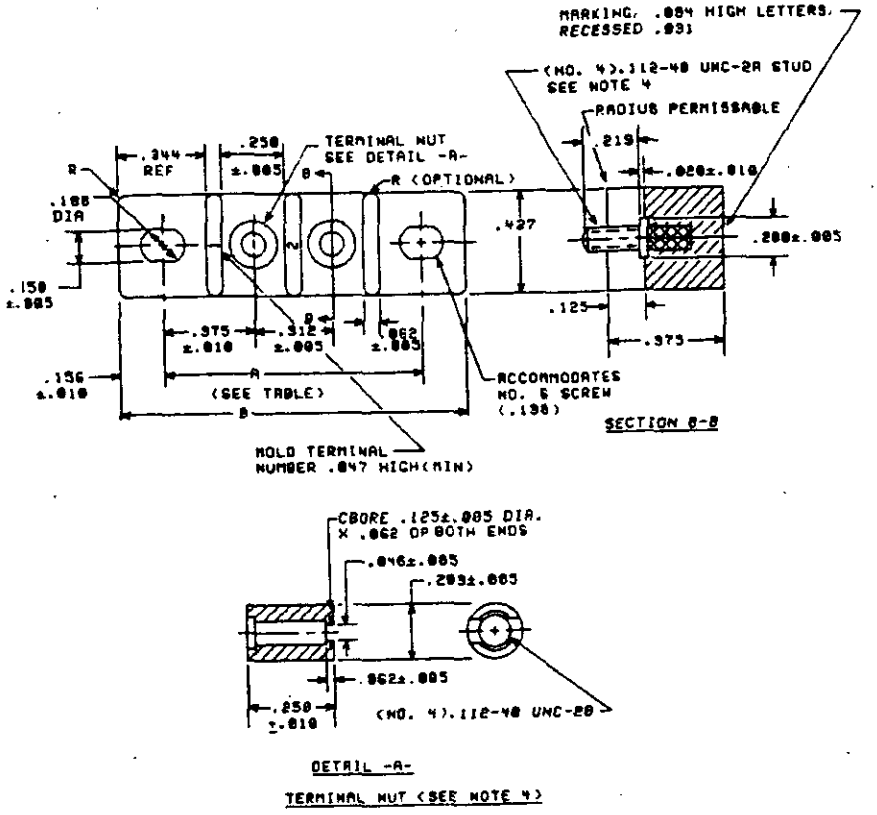


Figure 1. Dimensions and Configuration.

AMSC N/A

FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only.
3. Unless otherwise specified, tolerance ± 0.016 inch.
4. Studs shall be threaded to within 0.046 inch of the stud shoulders.

TABLE I - Dimensions.

Type designation1/	Dimensions		Recommended wire terminal lugs		Terminal nuts required
	A+.031, -.031	B+.031, -.062	MS-21004	MS-17143	
	inch (mm)	inch (mm)			
25TB2_	1.062 (26.97)	1.375 (34.93)			2
25TB5_	2.000 (50.80)	2.312 (58.72)	-5	-16	5
25TB6_	2.312 (58.72)	2.625 (66.68)	-12	-17	6
25TB7_	2.625 (66.68)	2.938 (74.63)	-19	-18	7
25TB9_	3.250 (82.55)	3.562 (90.47)			9
25TB10_	3.562 (90.47)	3.875 (98.43)			10
25TB12_	4.188 (106.38)	4.500 (114.30)			12

1/ Add letter "F" or "H" for temperature range to complete type designation.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.

Voltage rating (maximum): 300 volts.

Current rating: 25 amps.

Maximum number of terminal lugs for each stud:

MS-21004-5	3
MS-21004-12	3
MS-17143-16	3
MS-17143-17	3
MS-21004-19	2
MS-17143-18	2

Studs and nuts for class "H" terminal boards shall be corrosion resistan steel in accordance with class 304 of QQ-S-763.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

Plastic material: See table II.

TABLE II - Requirements for Plastics.

Terminal Board Class 1/	Maximum Temperature (°C)	Materials	Applicable Specification
F	155	GDI-30F MAI-60	MIL-M-14
H	220	MSI-30	MIL-M-14

1/ Terminal boards of a higher classification may be substituted for a lower temperature classification terminal board.

Dielectric withstanding test voltage: 1600 volts rms.

Revision letters are not used to denote changes due to the extensvieness of the changes.

Custodians:

Army - ER
Navy -
Air Force - 85

Preparing Activity:

Army-ER

(Project 5940-1017-15)

Review Activities:

Army-MI
Navy -
Air Force - 99
DLA-GS

User Activities:

Army - AV, AT, ME
Navy - MC, AS, SH
Air Force - 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.