MILITARY SPECIFICATION

RESISTORS, FIXED, FILM (HIGH STABILITY),

STYLE RN60

INACTIVE FOR DESIGN AFTER 9 MAY 1972 (SEE 6.2).
USE MIL-R-55182/3. CHARACTERISTICS C, E, AND G,
PREVIOUSLY INACTIVE FOR DESIGN AFTER 22 NOVEMBER 1968.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for style RN60, high-stability, film, fixed resistors. This style is available in characteristics C, D, E, and G.

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-R-10509 - Resistors, Fixed, Film (High Stability), General Specification for.

(Copies of specifications, standards, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-10509, and as specified herein.

3.2 Design and construction. The resistor shall be of the design, construction, and physical dimensions specified on figure 1.


3.3 Power rating. The power rating shall be 1/8 watt. For characteristic D, the power rating shall be 1/4 watt.

3.4 Voltage rating. The maximum continuous working voltage shall not exceed 250 volts. For characteristic D, the maximum continuous working voltage shall not exceed 300 volts.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Electronics Research and Development Command, ATTN: DELET-R-S, Fort Monmouth, New Jersey 07703, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5905

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:08Z
Check the source to verify that this is the current version before use.

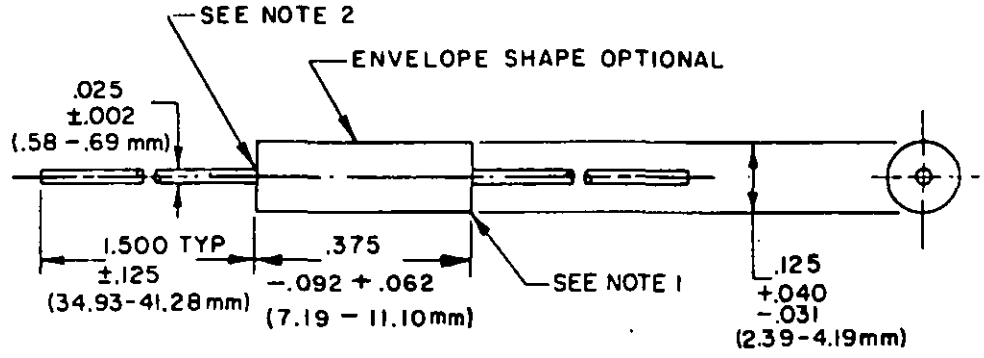

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The end of the body shall be that point at which the body diameter equals the nearest drill size larger then 150 percent of the nominal lead diameter, or 300 percent of the nominal lead diameter. The same drill size shall be used for each end of the body.
4. The leads shall be solderable to within .062 (1.58 mm) of the resistor body.

FIGURE 1. Style RN60 resistor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:08Z
Check the source to verify that this is the current version before use.

3.5 Resistance. Minimum and maximum resistance values shall be as follows:

Minimum resistance: Characteristic:		Maximum resistance: Characteristic:	
D, G	10.0 ohms.	D, G	1.0 megohm.
C, E	49.9 ohms.	C, E	0.4999 megohm.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-10509.

4.2 Terminal strength.

4.2.1 Direct load. Direct load shall be applied gradually until the load reaches 2 pounds.

5. PACKAGING

5.1 Packaging requirements. The packaging requirements shall be in accordance with MIL-R-10509.

6. NOTES

6.1 The notes specified in MIL-R-10509 are applicable to this specification.

6.2 Substitution data. The resistors specified herein are not for use in design after 9 May 1972. They are authorized for use in design contracts effective prior to or on 9 May 1972. Existing equipment shall be supported by substitute resistors in MIL-R-55182/3 of the same resistance value, resistance tolerance, and characteristic performance of this specification regardless of failure rate designation. Resistors specified in MIL-R-55182/3 are preferred for design and regardless of failure rate designation can be used as substitutes for inactivated resistors of the same resistance value, tolerance, and characteristic performance of this specification. Characteristics C, E, and G were previously inactivated for design by revision H of this specification, dated 22 November 1968. Characteristic substitution shall be made as indicated in table I.

TABLE I. Characteristic substitution.

MIL-R-10509 characteristic	Substitute MIL-R-55182 characteristic
C	H
D	K
E	J
G	C

6.3 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:08Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, CG
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5905-1049)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:08Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

US Army Electronics Research and Development Command
Attn: DELET-R-S
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:08Z
Check the source to verify that this is the current version before use.