
MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, (TYPE I), ELECTRONIC TEST EQUIPMENT, (3 WIRES, 125 VOLTS, 400 HERTZ, 1 PHASE), GROUNDING CONNECTOR ADAPTER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable assembly described herein shall consist of this document and the latest issue of Specification MIL-C-28777.

THIS SPECIFICATION INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION.

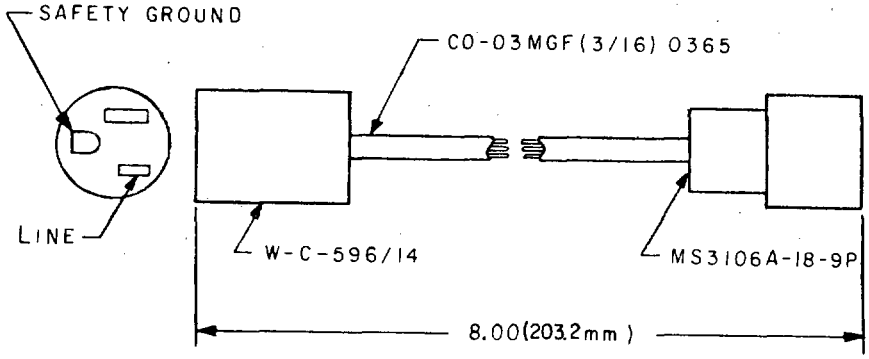

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Cable assembly.

FSC 6150

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Cable-plug connector interface: The green lead (with the yellow stripe) shall be connected to the safety ground terminal, the black lead shall be connected to the line terminal, and the white for neutral shall be connected to the remaining terminal of the plug connector.

Type I equipment connector and cable clamp: The MS3106A-18-9P shall have the safety ground lead connected to pin G, the line lead to pin B, and the neutral lead to pin D. Connections shall not be made to pins A, C, E, and F.

Part number: M28777/15-1.

Custodians:
Army - EL
Navy - EC
Air Force - 99

Review activities:
Navy - AS, MC
Air Force - 11, 85
DLA - GS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6150-0146-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:14Z
Check the source to verify that this is the current version before use.