MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

DECODER, BINARY, DIGITAL, KEY CODE GDN

This amendment forms a part of MIL-M-28787/7C(EC), dated 7 September 1982, and is approved for use within the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGES 4, 5, AND 6

TABLE I, table heading, class II: Delete "100° ±5°C" (three places) and substitute "85°C ±5°C" (three places).

* TABLE I, test conditions F17-F32, class II min columns: Delete "30" (two places) and substitute "20" (two places).

PAGE 5

TABLE I, class II, 85° ±5°C Max Column:

Test condition M1-M31 (odd numbers), Initial: Delete "52" and substitute "43". End-of-life: Delete "57" and substitute "48".

Test condition M2-M32 (even numbers), Initial: Delete "75" and substitute "63". End-of-life: Delete "80" and substitute "68".

Test condition N1-N31 (odd numbers), Initial: Delete "47" and substitute "40". End-of-life: Delete "52" and substitute "45".

Test condition N2-N32 (even numbers), Initial: Delete "70" and substitute "68". End-of-life: Delete "75" and substitute "73".

PAGE 7

* 4.4.2, delete and substitute the following:

" 4.4.2 Order of testing. Test conditions A through U shall be performed in any order with the following exceptions. Test conditions A, B, C, F, and Q are stress tests and will be performed only at 25°C ±5°C. If test conditions A, B, C, F, or Q are part of a sequence of tests, the order of testing shall be as follows: Q, A, B, C, F where applicable, followed by the remaining tests in the sequence."

* 4.5.1, lines five and six: Delete "C through Q" and substitute "D, E, and G through P".

* 4.5.3, lines three and four: Delete "C through Q" and substitute "D, E, and G through P".

* 4.5.3, line six: Delete "C through U" and substitute "D, E, G through P and R through U".

PAGE 18

FIGURE 7: Delete R1 from the line from the negative terminal of ITEM P01 to A and place it in the line from the positive terminal of ITEM P01 to O V REF.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:24Z
Check the source to verify that this is the current version before use.

PAGE 50

FIGURE 10, NOTE 1(e), delete and substitute:

"(e) R2 = Select value for a current flow of 14.4 mA ±1% with point L held at 0.4 V."

FIGURE 10, NOTE 2(e), delete and substitute:


"(e) R2 = Select value for a current flow of 16 mA ±1% with point L held at 0.4 V."

PAGE 67

FIGURE 15: Delete and substitute new figure 15 as printed on page 3 of this amendment.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:24Z
Check the source to verify that this is the current version before use.

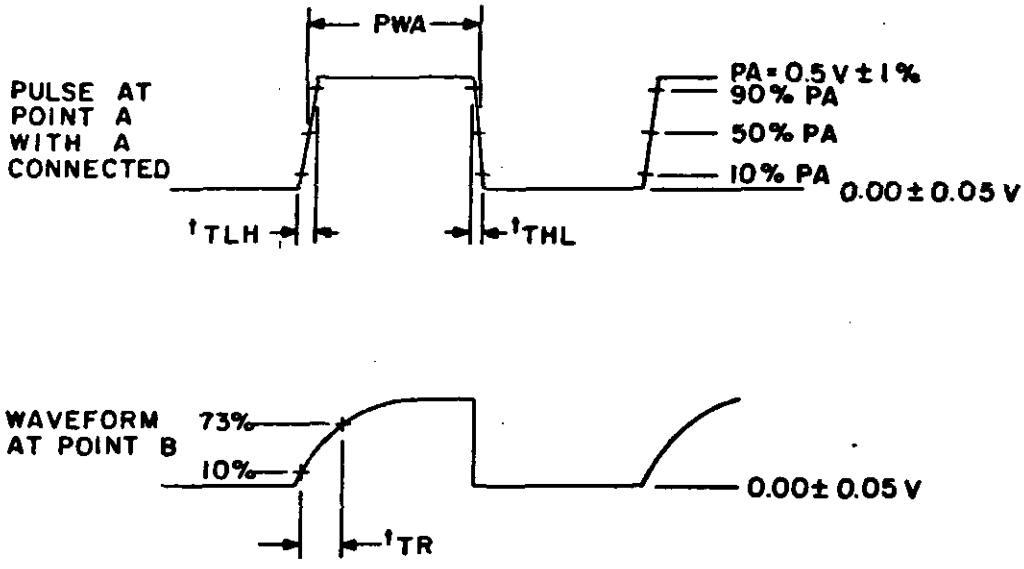


NOTES:
1. Input pulse parameters:
   PWA = 30 µs ±10%.
   $t_{TLH} = t_{THL}$ = 50 ns ±10%.
   PRP = 60 µs ±10%.
2. Measure $t_{TR}$ at point B.

FIGURE 15. Power supply transient rise time test circuit waveforms at table XI.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:24Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N692)



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:24Z
Check the source to verify that this is the current version before use.