NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/168B
27 September 1996
SUPERSEDING
MIL-L-11484/168A
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, LENGTH OF SERVICE
(20, 25, 30, 35, 40, 45, 50 AND 55 YEARS), NASA

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

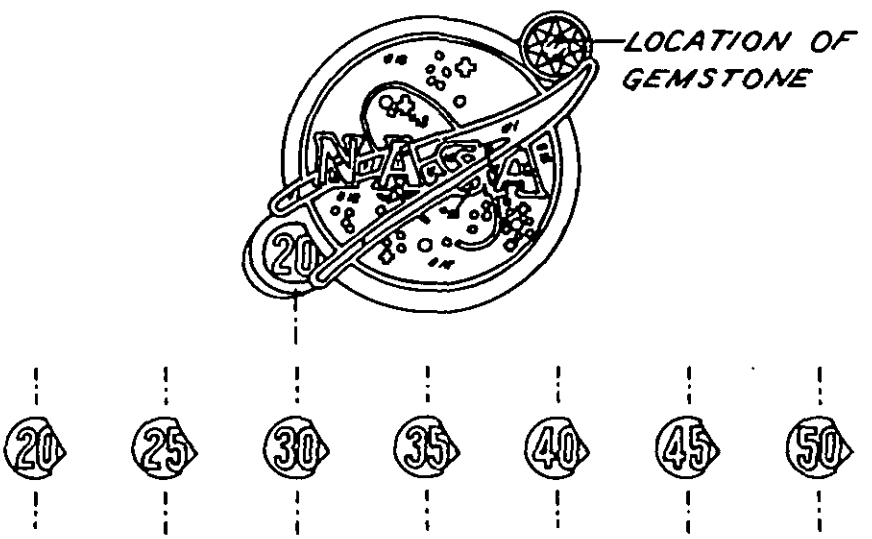

DASH NO.

-1: 20 Years with Ruby
-2: 25 Years with Blue Sapphire
-3: 30 Years with Emerald
-4: 35 Years with Amethyst
-5: 40 Years with White Sapphire
-6: 45 Years with White Sapphire
-7: 50 Years with White Sapphire
-8: 55 Years with White Sapphire

MATERIAL: Gilding Metal

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:08Z
Check the source to verify that this is the current version before use.

FINISH: Hard Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
DIAMETER: 1/2 inch (1.27 cm) (REF)
DIAMETER (At Widest Point): 23/32 inch (1.83 cm) (REF)
THICKNESS (At thickest Point): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Red	1
Blue	18
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. All stones shall be 2 points and set in the lapel button with a 4 bead setting. The stones shall be synthetic and of the color specified for the corresponding year as indicated.

5. Attaching device shall be prong with pick and flat ball type clutch or a pin and catch as specified in the procurement document. When a prong type device is required, the prong shall be centered on the reverse side and fused or soldered to the lapel button. When a pin type attaching device is required, the device shall be located 1/16 inch (0.16 cm) above the horizontal center line on the reverse side.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0858)

Civil Agency Coordinating activities:
NASA - NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:08Z
Check the source to verify that this is the current version before use.