NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/168D
30 November 2020
SUPERSEDING
MIL-DTL-11484/168C
5 October 2015

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, LENGTH OF SERVICE (20, 25, 30, 35, 40, 45, 50 AND 55 YEARS), NASA

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

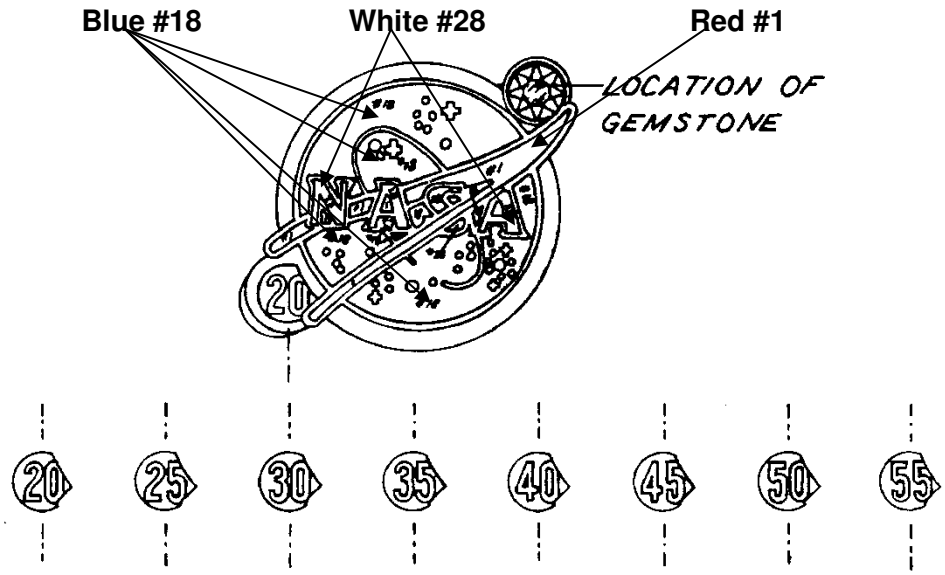

DASH NO.
-1: 20 Years with Ruby
-2: 25 Years with Blue Sapphire
-3: 30 Years with Emerald
-4: 35 Years with Amethyst
-5: 40 Years with White Sapphire
-6: 45 Years with White Sapphire
-7: 50 Years with White Sapphire
-8: 55 Years with White Sapphire

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:08Z
Check the source to verify that this is the current version before use.

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin (Stoning epoxy) 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSION:
DIAMETER: 1/2 inch (REF)
DIAMETER (At widest point): 23/32 inch (REF)
THICKNESS (At thickest point): 0.065 inch $\pm$ 0.005 inch

ATTACHING DEVICE:
1. Attaching device shall be prong with pick and flat ball type clutch or a pin and catch as specified in the procurement document.

2. When a prong type device is required, the prong shall be centered on the reverse side and fused or soldered to the lapel button. When a pin type attaching device is required, the device shall be located 1/16 inch above the horizontal center line on the reverse side.

NOTES:
1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. All stones shall be 2 points and set in the lapel button with a 4 bead setting. The stones shall be synthetic and of the color specified for the corresponding year as indicated.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#18
White	#28

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:08Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-061)

Civil Agency:
NASA - NA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:08Z
Check the source to verify that this is the current version before use.