NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/170G(IH)
23 March 2026
SUPERSEDING
MIL-DTL-11484/170F(IH)
30 October 2025

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, GENERAL DEFENSE INTELLIGENCE PROGRAM, DEPARTMENT OF DEFENSE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

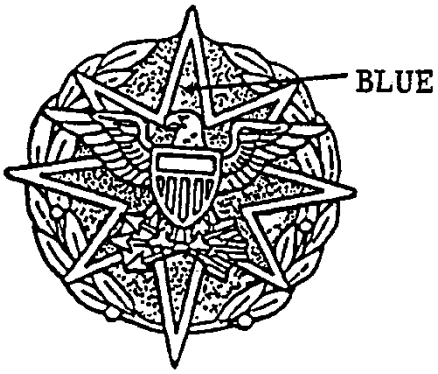

DASH NO. -1



DASH NO. -2, -3

DASH NO.
-1: Certificate of Distinction
-2: Certificate of Merit
-3: Certificate of achievement

MATERIAL:
BASE:
-1: Gilding Metal 90/10 (UNS Alloy No. C-210)
-2, -3: Red Brass 85/15 (UNS Alloy No. C-230)
DEVICE: Red Brass 85/15 (UNS Alloy No. C-230)

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:08Z
Check the source to verify that this is the current version before use.

FINISH:
-1: BASE: Epoxy resin (Stoning epoxy) Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish, Lightly Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 15.
DEVICE: 24K Gold Plated, Matte Finish, Lightly Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
-2: BASE: 24K Gold Plated, Matte Finish, Lightly Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
DEVICE: 24K Gold Plated, Matte Finish, Lightly Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
-3: BASE: Epoxy resin (Stoning epoxy) Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish, Lightly Polished Highlights and shall match TIOH Metal Finish Chip Number 15.
DEVICE: Epoxy resin (Stoning epoxy) Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish, Lightly Polished Highlights and shall match TIOH Metal Finish Chip Number 15.

DIMENSION:
BASE:
HEIGHT (Overall): 5/8 inch (REF)
WIDHT (Overall): 5/8 inch (REF)
THICKNESS (At thickest point): 0.070 inch $\pm$ 0.005 inch
DEVICE:
HEIGHT (Overall): 9/32 inch (REF)
WIDHT (Overall): 1/2 inch (REF)
THICKNESS (At thickest point): 0.075 inch $\pm$ 0.005 inch
ASSEMBLED THICHNESS (At thickest point): 0.155 inch $\pm$ 0.010 inch

ATTACHING DEVICE:
1. Attaching devices should be prong with wing type clutch.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIP	
COLOR	**CHIP NUMBER**
Blue	#33

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:08Z
Check the source to verify that this is the current version before use.

2 The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The rivets may be an integral part of the device. The device shall be located as shown.

3. All lapel buttons shall be lacquered.

4. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-221)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:08Z
Check the source to verify that this is the current version before use.