MIL-F-60037C (PA)
1 April 1975
Superseding
MIL-F-60037B (PA)
18 August 1967

MILITARY SPECIFICATION

FLARE SET, AN/ALA-17
ASSEMBLING AND PACKING

*This specification iS approved for use by all Departments and Agencies of the Department of Defense.

1. sCOPE

1.1 This specification covers the assembling and packing for one type of flare set, consisting of' eight (8) cartridge flares MX3529/ALA-17 and one flare rack which is designated as Flare Rack, CY2617/ALA-17.

*2 l APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

UU-P- 31	-	Paper, General Specification and Method of Testing.

MILITARY

MIL-P-116	-	Preservation, Methods of.
*MIL-A-48078	-	Ammunitions, Standard Quality Assurance Provisions, General Specification For.
MIL-F-60035	-	Flare, Cartridge, MX3529/ALA-17, Loading, Assembling and Packing.
MIL-C-60036	-	Cartridge Flare MX3529/ALA-17 Metal Parts For.
MIL-R-60040	-	Rack, Flare CY2617/ALA-17.

FSC: 1370

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes (ABC-STD-105).

DRAWINGS

U.S. ARMY PICATINNY ARSENAL

8860555 - Box, Packing, Ammunition, for Flare Set AN/ALA-17.
8860600 - Carton, Packing, Ammunition, for Flare Set, AN/ALA-17.
9200050 - Vibration Fixture on X&Z Axis
9200445 - Operating Instructions For RITA Flare Rack Assembly Vibration Tests.
9209573 - Flare Set, AN/ALA-17 Assembly.
9209672 - Illuminant Assembly.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer).

*2.2 Other publications. - The following documents form a Part Of this specification to the extent specified herein. Unless otherwise indicated, the issue In effect on the date of invitation for bids or request for proposal shall apply.

CODE OF FEDERAL REGULATIONS

Title 49 - Transportation, CFR 100-199

(The Code of Federal Regulations is available from the Superintendent of Documents, U.S. Government Printing Office Washington, D.C. 20402. Orders should specify "Title 49 Transportation, CFR 100-199 (latest revision)").

3. REQUIREMENTS

3.1 Material. - Materials shall be In accordance with applicable drawings and specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

3.2 Flare set assembly. - The flare set assembly shall comply with all the requirements of Drawing 9209573 and all associated drawings together with all the requirements of this specification and specifications MIL-F-60035, MIL-C-60036, and MIL-R-60040.

3.3 Resistance of circuit. - Prior to performing the aircraft vibration test, each flare, when measured in the rack, shall have a resistance of 0.37 to 1.25 ohms.

3.4 Aircraft vibration. - The flares and rack shall be safe and operable when subjected to this test.

3.5 Workmanship. - All parts and assemblies shall be fabricated and finished (or fabricated and loaded) in a thorough workmanlike manner, and all manufacturing, processing, and assembly operations shall be correctly performed. They shall be clean and free of burrs, sharp edges, unblended radii, surface defects, chips, dirt, grease and oil (except where specifically required), corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part or assembly nor shall they be contaminated by the cleaning agent. Exterior surface coatings shall be continuous except for a few light scratches not exposing base material. All required markings shall be neat and sharply defined. (Required packing shall be dry).

*3.6 Submission of results of contractor-conducted examinations and tests. - The contractor shall forward copies of the results of any of his examinations or tests to the designated address as required by the contract. (see 6.5).

3.7 First article inspection. - This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection and standard quality assurance provisions. - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

*4.2 Classification of inspections. - The following types of inspection shall be conducted on this Item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

a. First Article Inspection
b. Quality Conformance Inspection

*4.3 First article inspection

4.3.1 Submission. - The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2 and 4.3.3. The first article sample shall consist of the following items in sample quantities as indicated.

Part Description	Drawings	Quantity
Flare Set, AN/ALA-17, Assembly	9209573	4
Illuminant Assembly (pellets)	9209672	32

4.3.2 Inspections to be performed. - See MIL-A-48078 and paras 4.4.2.1 thru 4.4.2.6, testing per para. 4.4.3, and Table I specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

Table I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-60037C (PA)

PARAGRAPH 4.3.2 Cont.	TITLE Flare Set, AN/ALA-17		SHEET 1 OF 1		DRAWING NUMBER See Below NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Flare set (Dwg. 9209573)				
	Circuit resistance	2		3.3	4.5.1
	Squib circuit resistance	2		3.3	4.5.2
	Radiographic examination of cartridge	2		3.2	4.5.2
	Aircraft vibration	2		3.4	4.5.2
	Functioning	2		3.4	4.5.2
	Moisture content packing material	1 sample/each material		3.2	4.5.3
	Flare set test	2		3.2	4.5.1 (MIL-F-60035)
	Illuminant assemblies (9209672)				
	Burning time & energy output	32		3.2	

NOTES:

SARPA-QA FORM 2567 FEB 74

5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

*4.3.3 Rejection. - See MIL-A-48078.

*4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. - Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots of flare sets shall contain:

a. Racks from one manufacturer with one lot interfix number.

b. Flare cartridges from one manufacturer with one lot interfix number.

*4.4.2 Examination. - (See MIL-A-48078). Unless otherwise specified in the classification of defects and test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

Quality Conformance Inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Flare set assembled prior to inserting into carton	1 OF 1	9209573
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1.	Shorting ring missing		100%	3.2	Visual
Major A					
101.	Circuit resistance, prior to aircraft vibration		100%	3.3	4.5.1
Major B					
131.	Cover missing from cap end of cartridge		100%	3.2	Visual
132.	Bushing, washer or lubricant missing from necked cap screw		100%	3.2	Visual
133.	Flare assembly loose to the extent it can be removed by hand.		100%	3.2	Manual
Minor					
201.	Any component missing, damaged or incorrectly assembled.		0.65%	3.2	Visual
202.	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

Quality Conformance Inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Carton, prior to inserting flare set				8860600
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A					
101.	Any shorting clip missing		0.40%	3.2	Visual
Minor					
201.	Any packing material missing or improperly positioned.		0.65%	3.2	Visual
202.	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

Quality Conformance Inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3	Carton, prior to inserting in bag	1 OF 1	8860600
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A&B	None defined.				
Minor					
201.	Contents loose.		0.65%	3.2	Manual
202.	Sealing strip missing, torn, or improperly positioned.		0.65%	3.2	Visual
203.	Marking misleading or unidentifiable		0.65%	3.2	Visual
204.	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

Quality Conformance Inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Carton sealed in bag				8860600
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A					
101.	Heat seal test of sealed bag	Note a	Note a	3.2	Note a
Major B					
131.	Seal improper or incomplete		0.40%	3.2	Visual
132.	Bag punctured, torn or cut		0.40%	3.2	Visual
Minor					
201.	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

a. Sampling acceptance criteria, & test procedures for this test shall be as prescribed in Specification MIL-P-116 "Heat Seal Test".

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

Quality Conformance Inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-60037C (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Box, prior to sealing				8860555
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A&B	None defined.				
Minor					
201.	Any filler missing		0.65%	3.2	Visual
202.	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

Quality Conformance Inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-60037C (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8860555
4.4.2.6	Box, sealed				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major A&B	None defined.				
Minor					
201.	Contents loose in box		0.65%	3.2	Manual
202.	Box damaged to the extent that the contents are exposed, or likely to become exposed in subsequent handling.		0.65%	3.2	Visual
203.	Box improperly closed.		0.65%	3.2	Visual
204.	Marking misleading or unidentifiable.		0.65%	3.2	Visual
205.	Metallic seal missing or improperly sealed.		0.65%	3.2	Visual
206.	Evidence of poor workmanship.		0.65%	3.5	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

4.4.3 Testing.

*4.4.3.1 Aircraft vibration test (see 3.4) Major A defect. - A sample of two flare sets shall be selected for this test. Following the vibration aircraft test, the samples shall be functioned. If any illuminant assembly fails to ignite or any Illuminant assembly fails to meet the x-ray requirements of paragraph 4.4.2.7, of MIL-F-60035 or if three (3) or more flares break up into two or more large pieces, the lot shall be rejected. Breakage of a necked screw cap during or before completion of vibration in the x or z axis and before 50 percent of vibration is completed in the y axis shall be cause for rejection of the lot. The order of conducting vibration in the x and z axis may be varied but vibration in both axis must precede vibration in the y axis. In the event a necked screw cap, breaks after completion of 50 percent of vibration in the y axis, the test shall be stopped and the flare set shall be examined for other breakage and damage or unusual wear and the squib circuit resistance shall be checked. If' upon this examination no unusual wear or damage is revealed, the test shall be resumed. If, however, this condition is revealed, the flare set shall be replaced and the vibration test re-run (see 6.5).

4.4.3.2 Moisture content (all Packing material) See Dwg 8860600, Major A defect. - The contractor shall provide adequate controls to assure compliance with the requirements. For verification the contractor shall select, as a minimum, one sample of each material as representative of each months production of flare sets. Composite samples shall not be used. If the moisture content of a sample exceeds the allowable limit, that quantity of sub-lot of material represented by the sample shall be rejected. If material from a sub-lot with excessive moisture has been used In loading, all assemblies containing the non-conforming material shall be rejected. The test shall be performed as specified in 4.5.3.

*4.4.4 Inspection equipment. - The inspection equipment required to perform the inspections and tests prescribed in this specification Is identified in the 'Paragraph Reference/ Inspection Method' column in the tables starting with paragraph 4.4.2.1, and the test method paragraphs (see 4.5). The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and section 6.3 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

4.5 Test methods and procedures.

4.5.1 Resistance of circuit. - The circuit shall be tested for resistance by means of a suitable resistance measuring instrument capable of measuring the electrical resistance between zero and two ohms in intervals of hundredths of an ohm and have a short circuit current of 10 mini-amperes, max.

*4.5.2 Aircraft vibration. - Prior to the test, the squib circuit resistance shall be checked.

*4.5.2.1 Procedure. - The flare set AN/ALA-17 shall be fastened in an ejector set, flare AN/ALE-20 with a torque of 140 inch pounds, plus 10 inch pounds for all vibration tests. Where feasible, the flare with ejector set assembly shall be tested with the airplane mounting brackets. Otherwise a rigid test installation shall be made. Under no circumstances shall the freedom of movement of the flare cartridge during vibration be impaired. In all cases, the flare with ejector set assembly shall be attached either directly or through the airplane mounting brackets, if feasible, to a test fixture of' maximum rigidity. The test fixture should be designed to eliminate or minimize fixture resonances in the test frequency range. The test configuration shall be such that rotational motion of the test fixture is not induced due to any unsymetrical weight or stiffness distribution of the equipment item or mounting brackets.

Measurements of vibratory accelerations or displacements shall be made adjacent to the mounting points of the equipment item. All frequency measurements shall be accurate within plus or minus 5 percent. All displacement or acceleration measurements shall be accurate within plus or minus 10 percent. The motion of the vibrator table shall be simple harmonic motion with not more than 20 percent distortion. The monitoring control signal from the accelerometers shall be unfiltered.

The flare with ejector set assembly shall vibrate with essentially simple harmonic motion in each of three mutually perpendicular directions to explore for resonant frequencies of component parts over the ranges of frequencies applicable for the particular classification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

Frequency scans shall be conducted very slowly and carefully . The recommended speed shall be half (1/2) the stated cyclical rate from five (5) Hz to 1500 (Hz) (eg. if the time spread to cycle is fifteen (15) minutes it shall be accomplished in 30 minutes, or at stated speed). This time shall be deducted from the specified test frequency scan.

The test report must contain complete descriptions of all resonances, including the resonant frequencies, parts in resonance, and the effects on the functioning of the test Item. Scans shall be conducted at room temperature, and also at -60 degrees F. and plus 150 degrees F.

After completion of the frequency scan, resonance endurance tests shall be conducted at all resonant frequencies of the components, with the applied force adjusted as necessary to obtain the applicable fixture displacements or accelerations specified by the test curve. The vibrator and power supply must be capable of producing the prescribed fixture motions at all frequencies. Endurance tests shall not be conducted at any resonant frequency of the fixture. Endurance test shall be performed in fifteen (15) minute intervals. The delay interval shall be a minimum of ten (10) minutes for safety considerations.

If a change in resonant frequency occurs during endurance testing at resonance, the frequency of vibration shall be adjusted to follow the resonance. However, if large or abrupt resonant frequency shifts occur, the item shall be examined for component failures or excessive wear, etc.

Resonance endurance tests shall be conducted for one million hertz each or 8 hours, whichever occurs first, for the total of all resonances. Two-thirds of each endurance test shall be conducted at room temperature. One-sixth of each test shall be conducted at -60 degrees F, and one-sixth of each test shall be conducted at plus 150 degrees F. If the same resonance is excited by vibration applied in more than one direction, the endurance test for that resonance shall be accomplished with vibration applied to the direction which produces the greatest response. If no resonances are found, the item shall be vibrated at 100 Hertz (Hz) and the corresponding amplitude of the applicable test curve for one million Hertz In each of three mutually perpendicular directions (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

The flare with ejector set assembly shall be subjected to the following cycling tests at room temperature in addition to the frequency scan and resonance endurance tests. The equipment as mounted for the resonance tests shall be vibrated at the displacements and accelerations defined by the attached test curve with the frequency in a cycle continuously varied between the limits of the applicable curve of approximately 15 minutes. The rate of change of frequency shall be proportional to the frequency. The total test time shall be 1-1/2 hours. This test shall be repeated with vibration along each of three mutually perpendicular axes. The cycling test may be broken into convenient ranges, provided the cycling rates and test times for each range are not change. Testing shall be performed in accordance with 9200445 and 9200050.

4.5.2.2 Examination. - During and following vibration, a check shall be made for broken screw, cap. Following the vibration aircraft test, the squib circuit resistance shall be checked for informational purposes. All cartridge assemblies shall be x-rayed to meet requirements of paragraph 4.4.2.7 of MIL-F-60035 and to determine whether any component became dislodged or broken. All thirty two flares shall be fired by delivering 28 volts and 3 amperes to each flare (see 6.5).

4.5.3 Moisture content (packing material). - The moisture content shall be determined in accordance with Method 240 of Specification UU-P-31 except that a 50 gram sample shall be used.

*5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

5.1.1 Level A. - The flare set, AN/ALA-17 shall be preserved and packaged in accordance with dwg 8860600.

5.2 Packing.

5.2.1 Level A. - The carton shall be packed as specified in dwg 8860555.

*5. 3 Marking. - The marking shall be in accordance with dwg 8860600 and 8860555.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

*6. NOTES

6.1 Intended use. - The flare set, AN\ALA-17 is intended for aircraft use.

*6.2 Ordering data. - Procurement documents shall specify the following:

a. Title, number and date of this specification.

b. Provisions for submission of first article samples.

c. provisions of MIL-A-48078.

*6.3 Submission of inspection equipment designs for approval. - (See MIL-A-48078) Submit equipment designs as required, to Commander: Picatinny Arsenal, ATTN: SARPA-QA-T-T Dover, New Jersey 07801.

6.4 Distribution of ammunition data cards. - Distribution of data cards shall include the following: Commander, Picatinny Arsenal, ATTN: SARPA-QA-A-M Dover, New Jersey 07801.

*6.5 Submission of test data on vibration test. - In addition to normal distribution of records, when the vibration test is complete, all information obtained in accordance with paragraph 4.4.3.1 and 4.5.2.2 shall be forward to: Commander, Picatinny Arsenal, ATTN: SARPA-QA-A-M, Dover, New Jersey 07801.

6.6 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army-PA

Preparing Activity:
Army-PA

Project Number: 1370-A041

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

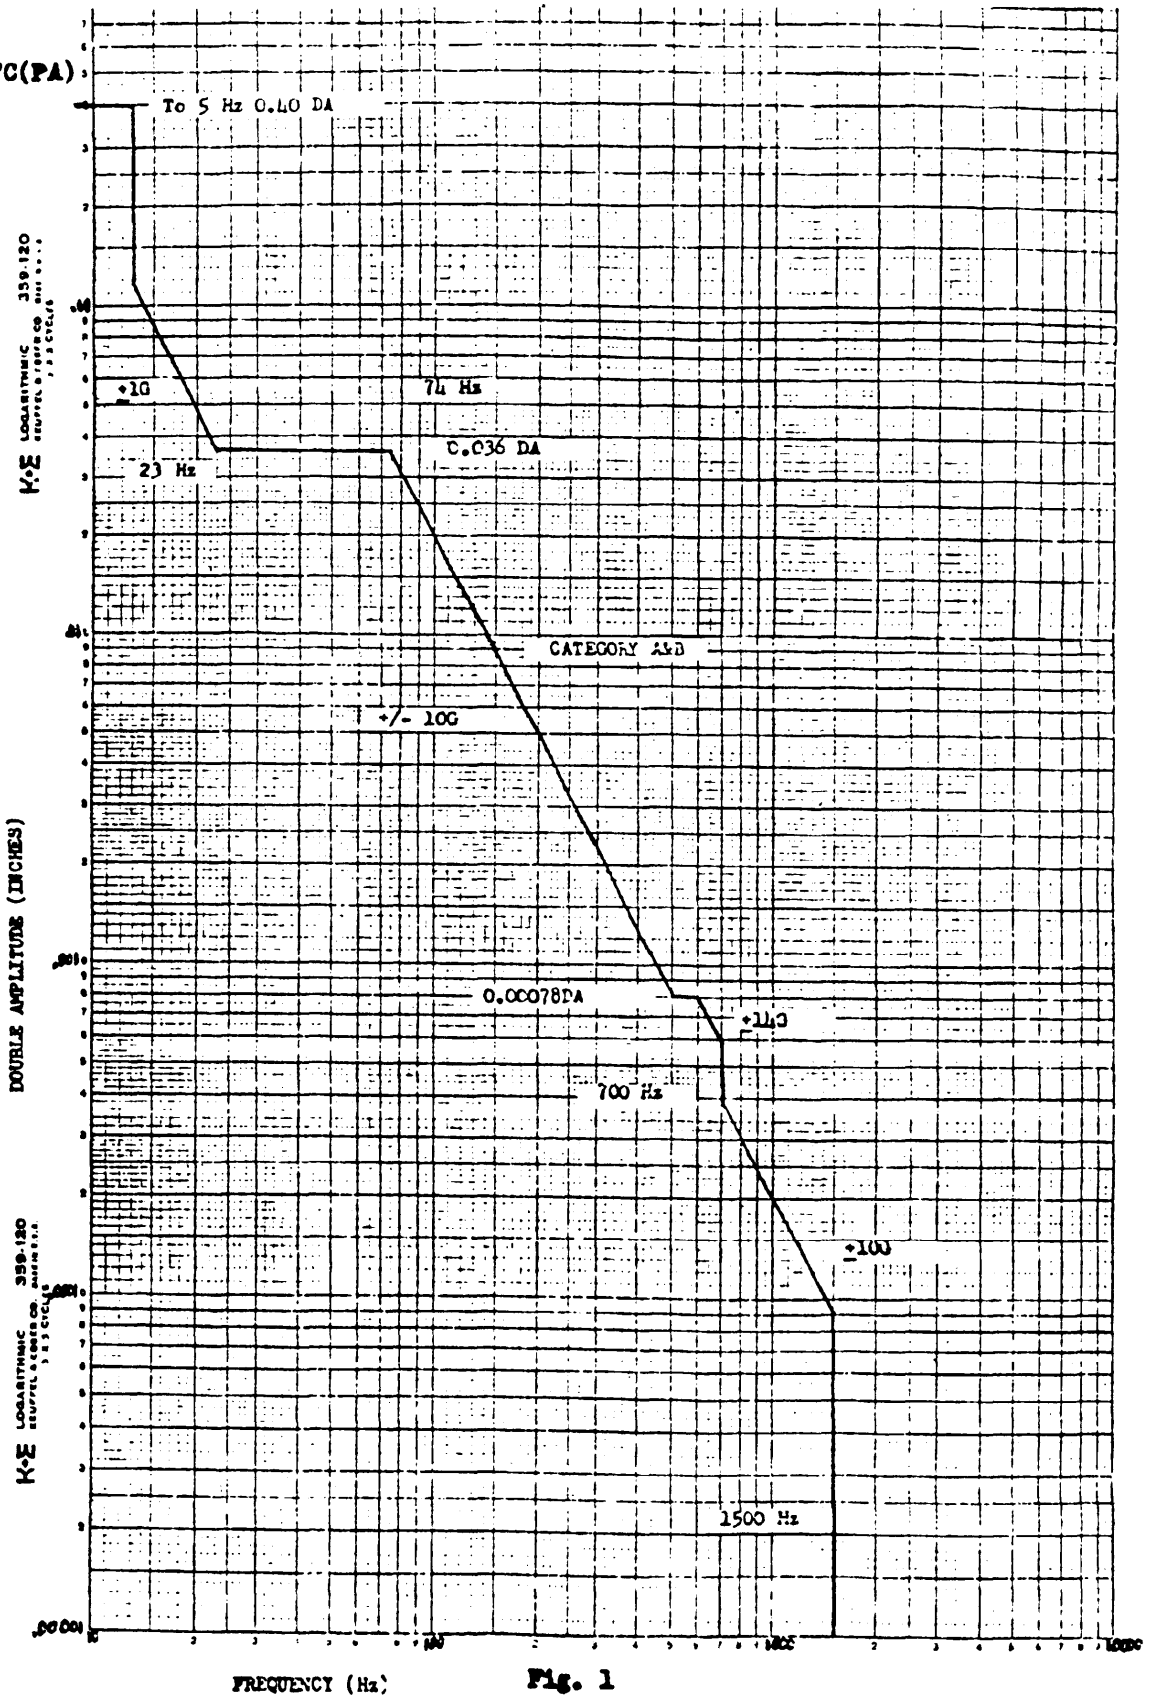


Fig. 1

AIRCRAFT VIBRATION CURVE

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:05Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-A
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:05Z
Check the source to verify that this is the current version before use.