This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection of all new engineering and design applications and for repetitive use shall be made from this document. when applicable.

Review activity:
DSA-GS

FED. SUP CLASS
3455

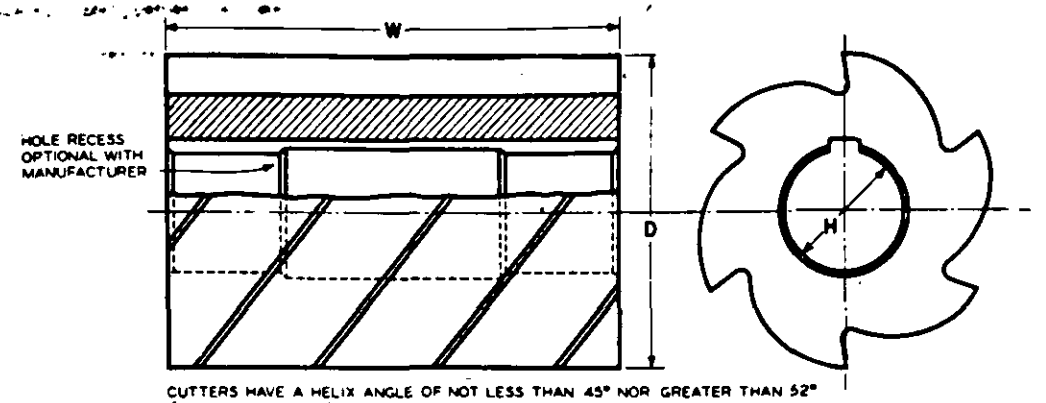

CUTTERS HAVE A HELIX ANGLE OF NOT LESS THAN 45° NOR GREATER THAN 52°
(L.H. HELIX SHOWN)

DASH NO.	Diameter of Cutter (D) Nominal	Width (W) Nominal	Diameter of Hole (H) Nominal
-1	3	4	1-1/4
-2	3	6	1-1/4

NOTES:
1. Referenced documents shall be of the issue in effect on date of invitations for bids or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.
2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
3. The part number consists of the MS number, plus the dash number. Example: MS15689-1.

© **CANCELED** after 31 March 1981. For procurement use American National Standards Institute ANSI B94.19.

APPROVED 1 Oct 54 REVISED (A) 9 APR 57 (B) 1 AUG 78 (C) 31 Mar 81

P.A. AL Other Cust 99	TITLE CUTTERS, MILLING, PLAIN, HELICAL	MILITARY STANDARD MS15689
Procurement Specification GGG-C-755	SUPERSEDES:	SHEET 1 OF 1

Project No. 3455-0063

DD FORM 1 SEP 65 672 (Coordinated) EDITION OF 1 SEP 57 MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:50Z
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2052