NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS.
6240

This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps, type TS-166. The item covered hereon is standard for use in the design of new equipment procured by the Bureau of Ships.

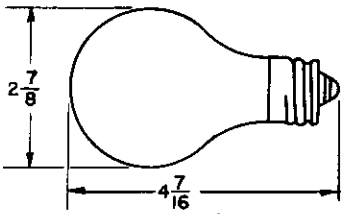

(A) CANCELLED AFTER 30 SEPTEMBER 1968
USE MS 15541 PART NUMBER MS15541-2

Characteristic	Type TS-166
Industry number	100A21/RS
Watts	100
Volts	115
Bulb	A 21
Finish	Inside frosted
Base	Medium screw
Filament	C17-rough service
Light center length (inches)[1]	2-7/8
Hours life (approximate)	500
Use	Explosionproof portable light

[1] Distance from center of light source to bottom base contact.

APPROVED 24 FEB 1955 REVISED (A) 30 September 1968

MS part number	FSN
MS15829-1	

CUSTODIANS	OTHER INT.
Ships	A - N - AF -

MILITARY STANDARD

LAMP, INCANDESCENT, A 21, MEDIUM SCREW

MS15829 (SHIPS)

Procurement Specification	SUPERSEDES:	SHEET
None		1 OF 1

DD FORM 672
1 OCT 52

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-512/A-1799

AS7088

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:51Z
Check the source to verify that this is the current version before use.