FED. SUP CLASS
5120

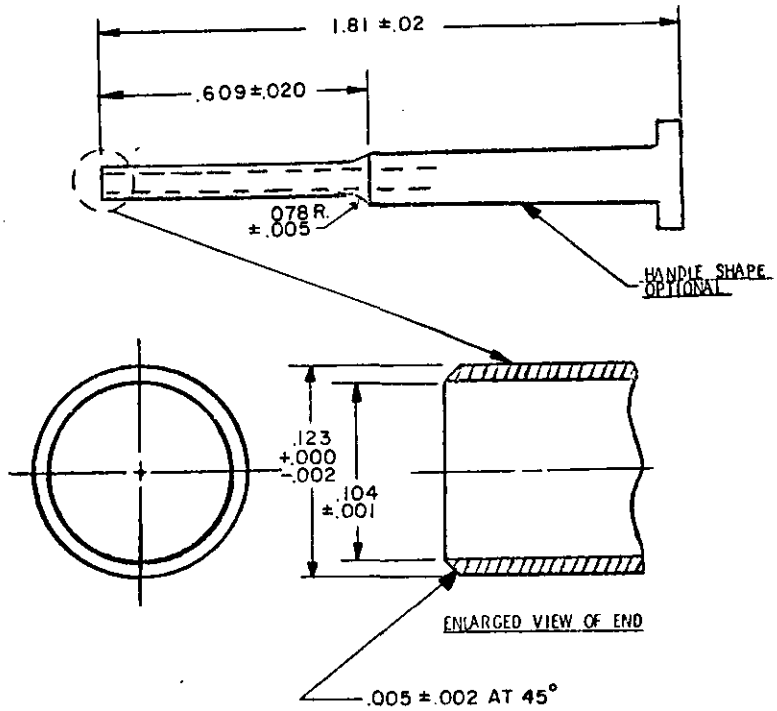

NOTES:
1. .104 Diameter hole shall be .500 inch deep minimum.
2. Tool is designed to remove MIL-C-22857 Connector contacts.
3. Tool shall be marked on handle with the Military part number per MIL-STD-130.
4. All dimensions in inches.
5. Referenced documents shall be of the issue in effect on date of invitation for bid.
6. For design feature purposes this standard takes precedence over procurement documents referenced herein.

(B) CANCELED USE MIL-I-81969/20

Entire standard redrawn.

(B) DENOTES CHANGE

P.A Navy - EC Other Cust Army - CR Air Force - 99	International interest	TITLE REMOVAL TOOL, CONNECTOR, ELECTRICAL CONTACT SIZE 16 CONTACT	MILITARY STANDARD MS17806
Procurement Specification None		SUPERSEDES:	PAGE 1 OF 1

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

* U.S. GOVERNMENT PRINTING OFFICE: 1980-603-121/2852

Source: https://assist.dla.mil - Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

APPROVED 20 February 1962 REVISED (A) 18 March 1970 (B) 6 June 1980

User activities: Army - MU, AT, ME
Navy - OS, AS, MC, SH
Air Force -

Review activities: Army - MI,AV
Navy -
Air Force - 85

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.