FED. SUP CLASS
4730

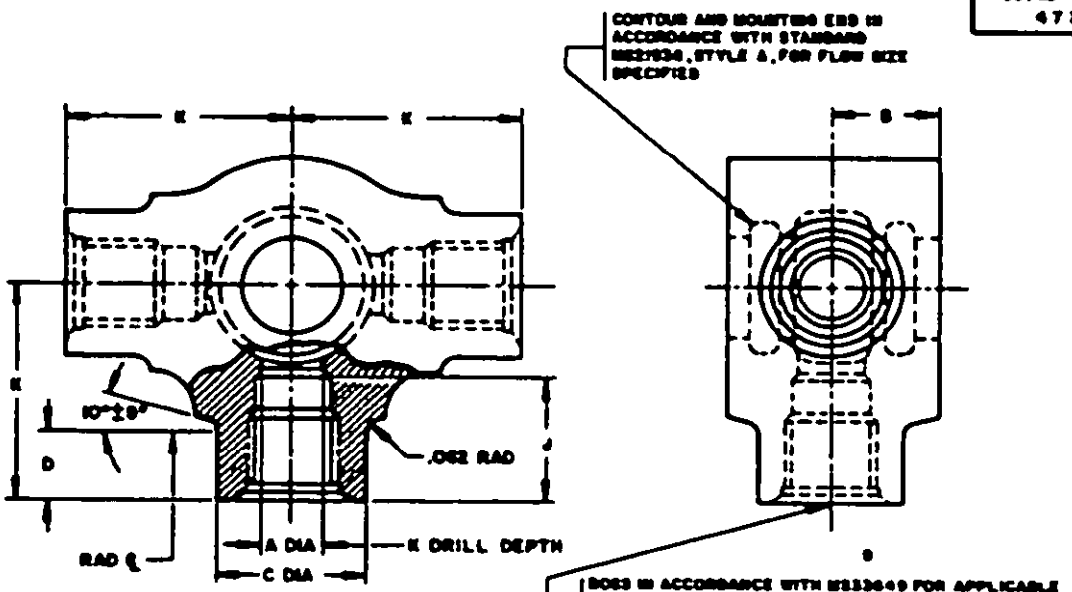

LOW FLOW SIZE DASH NUMBER	TUBE OD	THREAD T REF	A	B	C ±.031	D ±.031	J	E
-4L	1/4	7/16-20 UNEF-2B	.313	.500	.500	.469	.625	1.063
-6L	3/8	1/2-20 UNEF-2B	.344		.719	.656		1.094
-8L	1/2	9/16-18 UNEF-2B			.813	.719		1.156

HIGH FLOW SIZE DASH NUMBER	TUBE OD	THREAD T REF	A	B	C ±.031	D ±.031	J	E
-4S	1/4	7/16-20 UNEF-2B	.313	.500	.500	.594	.625	1.219
-6S	3/8	1/2-20 UNEF-2B	.375		.719	.813		1.344
-8S	1/2	9/16-18 UNEF-2B	.406		.813	.906		1.313
-10S	5/8	11/16-16 UNEF-2B	.438		1.125	.938	.750	1.469

(B) MATERIAL: ALUMINUM-ALLOY EXTRUSION, 6061, SPECIFICATION QQ-A-200/8, TEMPER T6, ARTIFICIALLY AGED. ALUMINUM-ALLOY FORGING, 6061, SPECIFICATION QQ-A-367, CONDITION A, TEMPER T6.

FINISH. SEE PROCUREMENT SPECIFICATION.

(B) ALL MACHINED SURFACES FINISHED TO 250 RMS EXCEPT AS NOTED.
SURFACE FINISH IN ACCORDANCE WITH STANDARD MIL-STD-1.
FITTINGS SHALL BE FREE FROM ALL BANDING SCRIBES AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.

INSTALLATION IN ACCORDANCE WITH STANDARD MS21961.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B)

APPROVED 20 NOV 67 REVISED (A) 12 AUG 68 (B) 13 JUN 75

P.A. AIR FORCE – 82 Other Cust NAVY – AS	TITLE BODY, CLUSTER FITTING, THREE WAY, INTERNAL BOSS	MILITARY STANDARD MS 21960
PROCUREMENT SPECIFICATION MIL-P-8606	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:42Z
Check the source to verify that this is the current version before use.