This Military Standard is approved by the Department and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities:

Review activities:

(8) FED. SUP CLASS 4730

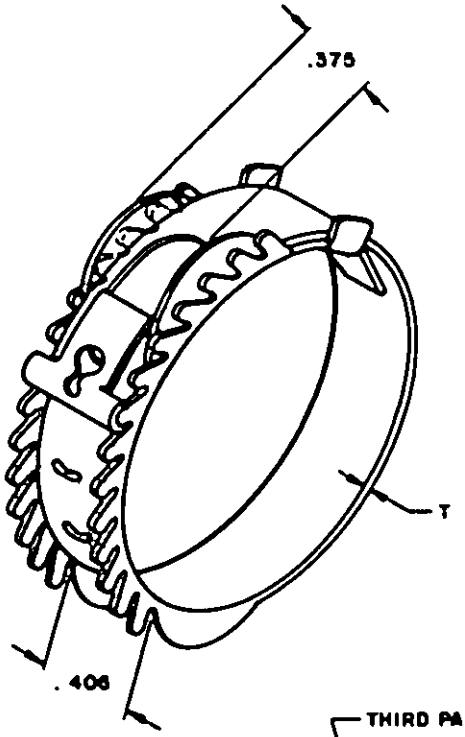

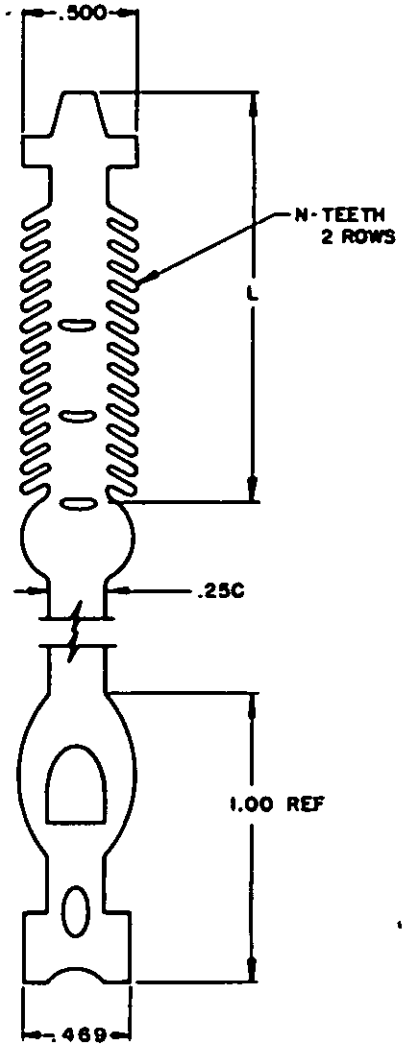

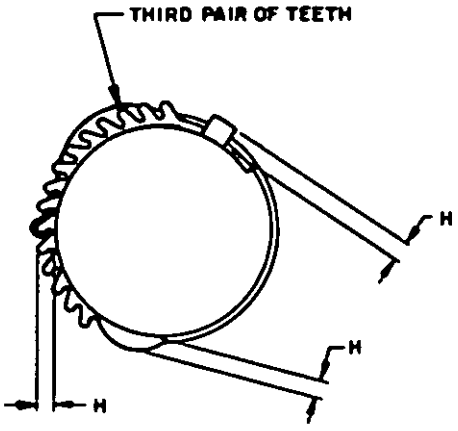

DASH NO	HOSE OD		H	T	L	NUMBER OF
	MIN	MAX	MAX HT	THICKNESS	TOOTH LENGTH	TEETH
-1	.469	.500	.093	.017	1.000	8
-2	.563	.625				
-3	.688	.750				
-4	.813	.875		.020		
-5	.938	1.250		.022	1.719	14

(8) MATERIAL: STEEL, CARBON, ANSI/ASTM A682M-77 SHEET AND STRIP, UNTEMPERED.
FINISH: PHOSPHATE COATING IN ACCORDANCE WITH TT-C-490, TYPE I, FOLLOWED BY ZINC CHROMATE COATING IN ACCORDANCE WITH TT-P-1757, COLOR T.

THE THIRD PAIR OF TEETH SHALL BE THE MINIMUM ENGAGEMENT FOR USE OF THE CLAMP.

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010

APPROVED 2 APR 1963 REVISED A 15 SEP 1972 (8) 12 January 1984

P.A. AIR FORCE (8)
Other Cust ARMY - AV
NAVY - AS

TITLE (8)
CLAMP - HOSE

MILITARY STANDARD
MS 22064

PROCUREMENT SPECIFICATION NONE

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT 1660-0426

Source: https://assist.dla.mil -- Downloaded: 2026-10-23 10:45:22
Check the source to verify that this is the current version before use.