FED. SUP CLASS
4930

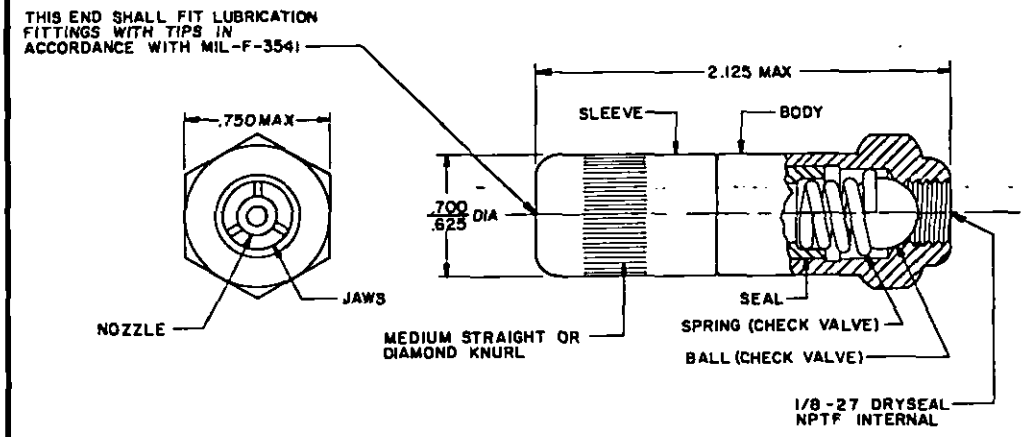

MS PART NO	STYLE
MS-24207-1	W/CHECK VALVE
MS-24207-2	W/O CHECK VALVE

NOTES:
1. *Dimensions are in inches.*
2. Material: All components, except as specified below, shall be steel.
   a. Spring (ball check): Music wire not less than .033 inch in diameter.
   b. Seal: Oil-resistant rubber compound.
3. Treatment:
   a. Jaws, nozzle and sleeve, case harden to not less than .005 inch in depth.
   b. Seal: Treat to prevent sticking.
4. A knurled surface with O.D. of not more than .750 inch may be substituted for the hex wrench grip.
5. Finish for materials that are not corrosion resistant shall be in accordance with QQ-P-416, Class 2, Type II, or QQ-Z-325, Type II, Class 2.
6. *Reference documents shall be of the issue in effect on date of invitations for bid or request for proposal.*
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

© ENTIRE STANDARD REVISED

P.A. ARMY-ME Other Cust NAVY-YD AIR FORCE-99	TITLE Coupling, grease gun; hydraulic type nozzle	MILITARY STANDARD MS 24207
PROCUREMENT SPECIFICATIONS MIL-L-4387	SUPERSEDES:	PAGE 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4930-0278

User activities: Army - AT, Navy - SH
Review activity: DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 27 JULY 1954 REVISED (A) 13 MARCH 1959 (B) 29 AUGUST 1966 (C) 21 APRIL 1977

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.