Ⓐ Reviewers/User Activities: Air Force: OOA. Reviewer/User information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in current DODISS.

Ⓐ This military standard is approved by the OOAMA, Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
1630

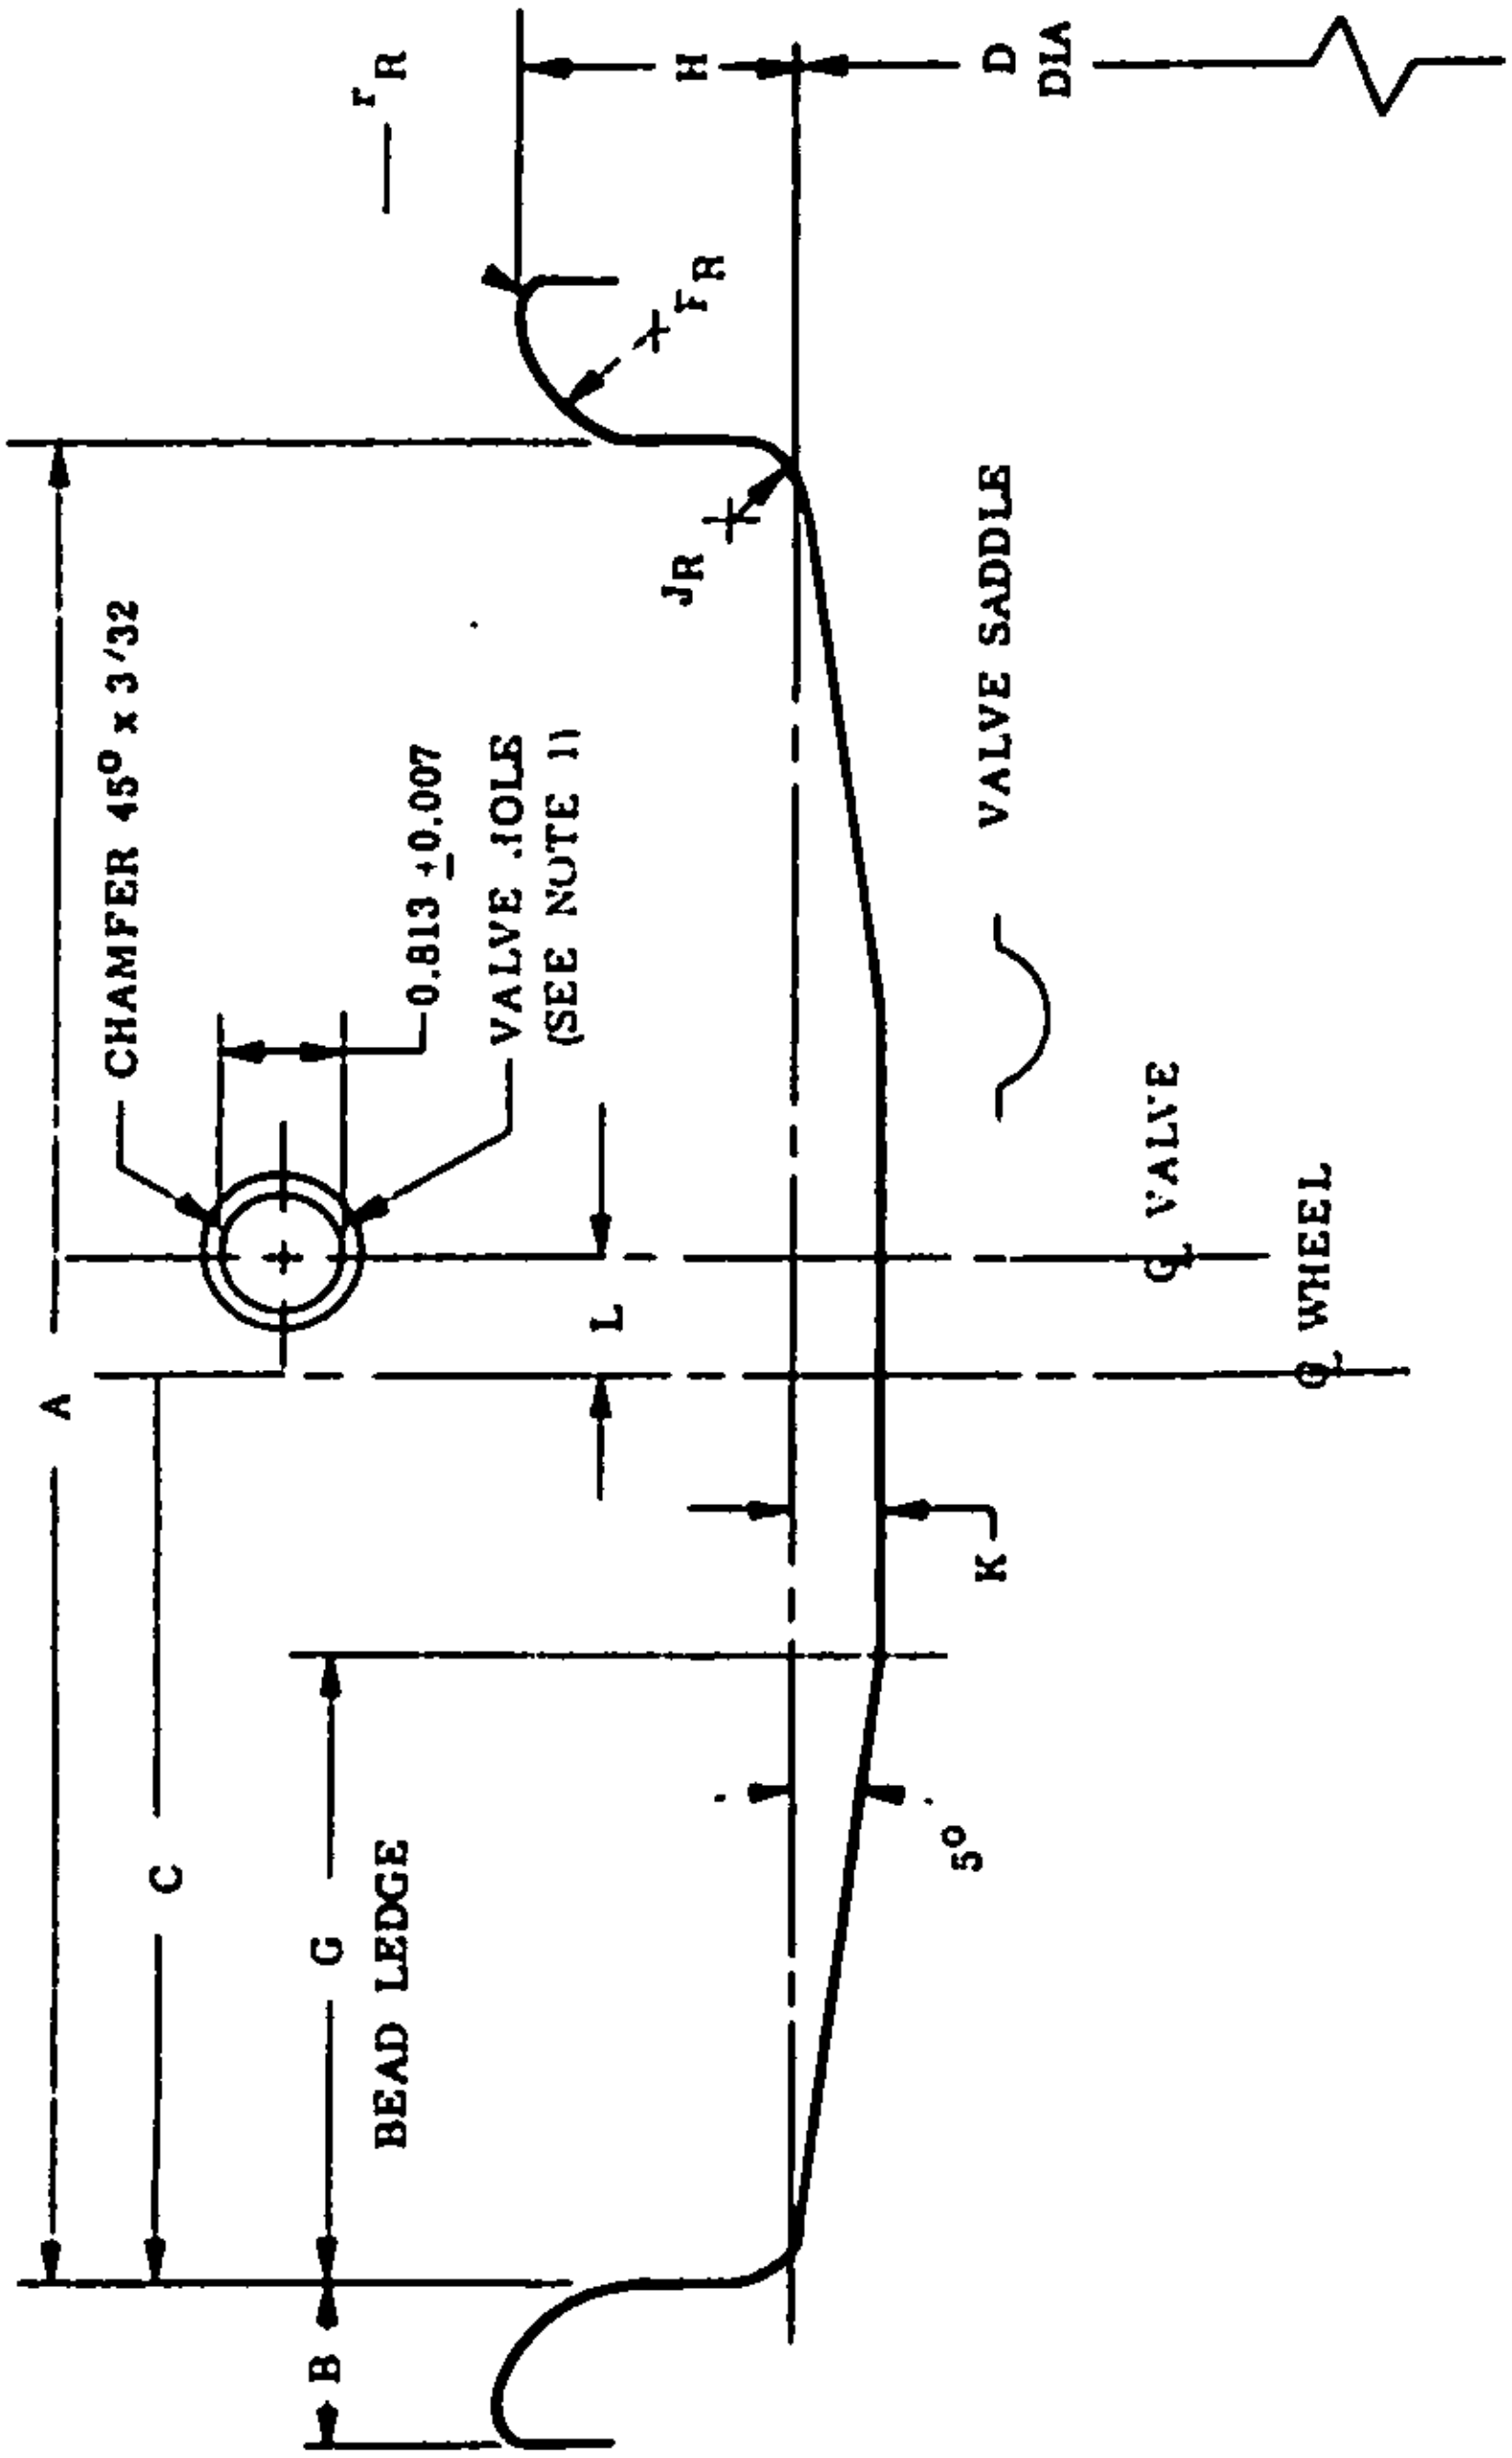

Ⓐ

SIZE	A	B	C	D	FR	G	H	K	K	JR	L	rR
	±0.062	MIN	±0.031	DIAMETER	±0.016	MIN	±0.010	MAX	MIN	±0.010	±0.125	MIN
56 x 16	12.750	1.250	6.375	28.000 +0.023 -0.000	1.062	4.375	2.250	0.688	0.375	0.500	0.640	0.125
49 x 17	13.250	1.188	6.625	20.000 +0.016 -0.000	0.938	3.250	1.750	0.875	0.312	0.394	0.375	0.156

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
TOLERANCES:
FRACTIONS ±1/64. DECIMALS ±0.005. ANGLES ±0° 30'.

Ⓐ NOTE 1: VALVE HOLE, "L" DIMENSION AND VALVE SADDLE REQUIRED ON TUBE TYPE AND CONVERTIBLE WHEELS ONLY. TUBELESS WHEELS REQUIRE A MACHINED BOSS, PER AND10050.

APPROVED 25 APR 56 REVISED Ⓐ 5 MAR 64

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

P.A. OOA Other Cust	TITLE RIM CONTOURS, 56 X 1 AND 49 X 17, TYPE VII, EXTRA HIGH PRESSURE, MLG WHEEL	MILITARY STANDARD MS 24368 (USAF)
Procurement Specification NONE	SUPERSEDES:	SHEET OF

DD FORM 1 SEP 57 672 LIMITED (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

GPO 8C8-073

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.