INCH-POUND

MS24695A
14 July 2005
SUPERSEDING
MS24695
13 October 1960

DETAIL SPECIFICATION SHEET

SPRING LOADED MOUNTING ASSEMBLY, CONNECTOR, RACK AND PANEL, MINIATURE

Inactive for new design after 8 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26518.

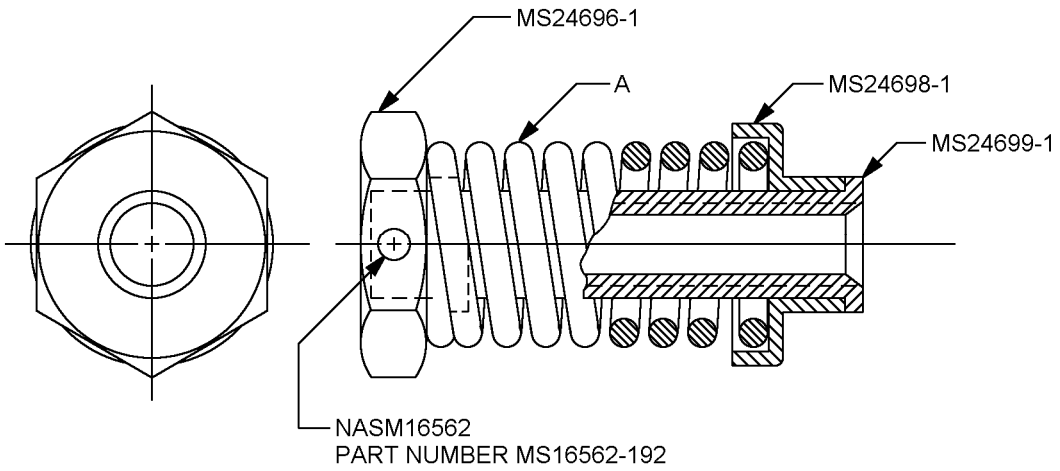

The Qualified Products List (QPL) associated with this inactive for new design specification will be maintained until acquisition of the product is no longer required, where upon the specification and QPL will be canceled.

MS pin 1/	A (spring) MS24697	
	Approximate free length	Spring dash number
MS24695-1	.755 (19.18 mm)	-1
MS24695-2	.875 (22.23 mm)	-2
MS24695-3	.945 (24.00 mm)	-3

1/ Part identifying number (PIN)

FIGURE 1. Spring loaded mounting assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Spring loaded mounting assembly and configurations see figure 1.

Part or identifying number (PIN): MS24695 dash number from figure 1.

Referenced documents: In addition to MIL-DTL-26518 this document references the following:

MS24696
MS24697
MS24698
MS24699
NASM16562

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4703-000)

Review activities:
DLA - IS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.