MS9880 (ASG)

FED. SUP CLASS
5310

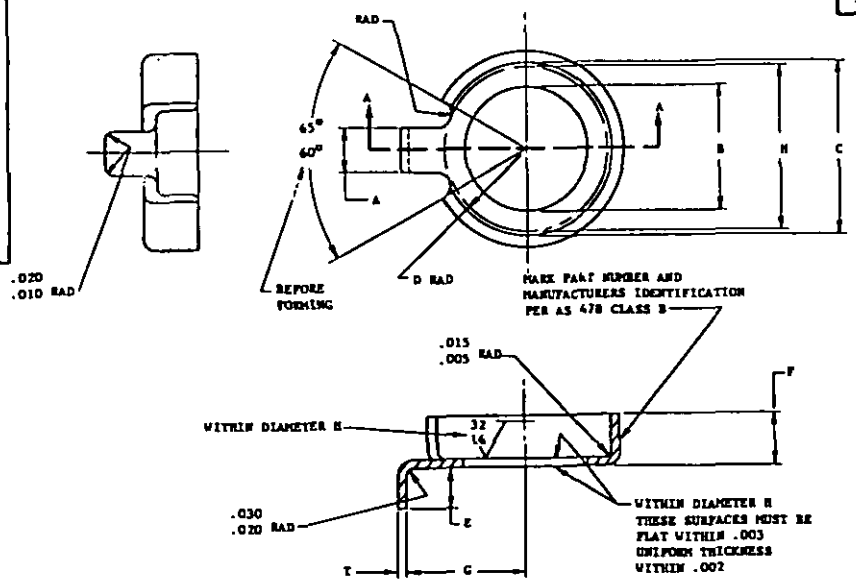

SECTION A-A

PART NUMBERS	NOM SIZE	A +.005 -.000	B MIN	B MAX	C +.005 -.000	D +.000 -.010	E +.010 -.000	F +.010 --	G +.005 -	T MIN	T MAX	H	APPROX WEIGHT LB/100
MS9880-09	.190	.110	.230	.237	.377	.170	.093	.140	.226	.019	.025	.347	.15
MS9880-10	.250	.110	.290	.299	.440	.205	.100	.165	.270	.028	.036	.410	.30
MS9880-11	.312	.140	.352	.361	.502	.235	.100	.165	.330	.028	.036	.472	.34
MS9880-12	.375	.140	.415	.425	.564	.265	.140	.165	.370	.028	.036	.534	.38

1. DIAMETERS B & C SHALL BE CONCENTRIC WITHIN .005 FIR.
2. MATERIAL: CORROSION RESISTANT STEEL AMS 5510.
3. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES.
4. REMOVE BURRS AND SHARP EDGES.
5. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
6. HEAT TREATMENT: FORMED WASHERS SHALL BE ANNEALED AT 1925°F. TO 1975°F FOR 5 TO 10 MINUTES AND COOLED IN STILL AIR. WASHERS TO BE DESCALED.
7. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 21 May 68 REVISED

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to apply this standard where suitable.

Review activities:
DLSP - 82, 85

P.A.
USAF-11
Other Cust
Navy - AS

PROCUREMENT SPECIFICATION
NONE

TITLE
WASHER, CUP, LOCK - CRES AMS 5510

SUPERSEDES:
MS 9684

MILITARY STANDARD
MS 9880 (ASG)
SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)
ASD use only

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.