NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/208F(IH)
19 February 2026
SUPERSEDING
MIL-DTL-3628/208E(IH)
7 September 2021

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, SECRETARY, DEPARTMENT OF HEALTH AND HUMAN SERVICE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628.

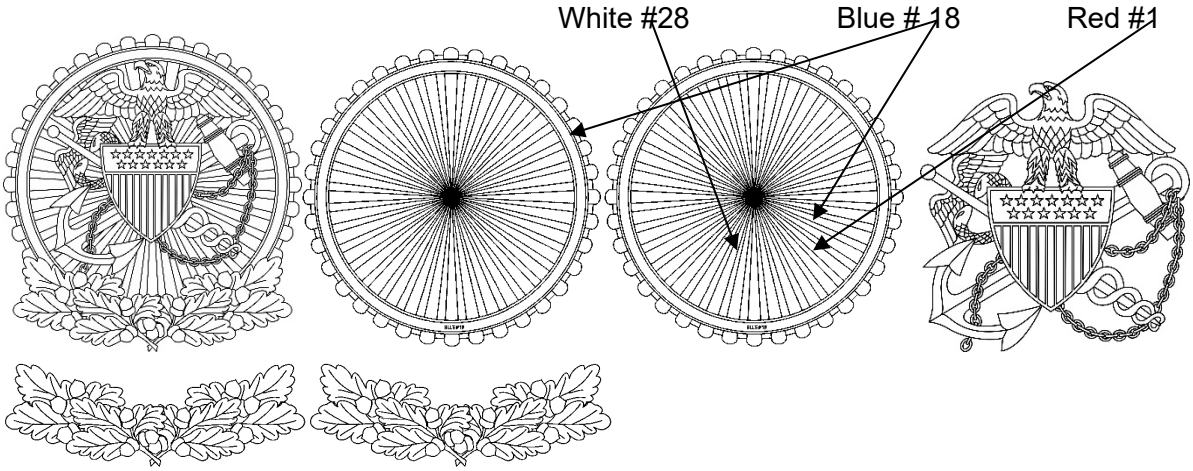

ASSEMBLED BASE EAGLE DEVICE OAK LEAVES

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:
BASE: Gilding Metal 95/5 (UNS Alloy No. C-210)
OAK LEAVES DEVICE: Red Brass 85/15 (UNS Alloy No. C-230)
EAGLE DEVICE: Gilding Metal 95/5 (UNS Alloy No. C-210)

FINISH:
BASE: Epoxy resin, Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
OAK LEAVES DEVICE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:09Z
Check the source to verify that this is the current version before use.

EAGLE DEVICE: Epoxy resin (Stoning epoxy) 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
HEIGHT (Assembled):
-1: 2-1/8 inches (REF)
-2: 1-3/8 inches (REF)
EAGLE DEVICE HEIGHT (Highest to lowest point):
-1: 1-3/8 inches (REF)
-2: 7/8 inch (REF)
BASE DIAMETER:
-1: 2 inches (REF)
-2: 1-5/16 inches (REF)
OAK LEAVES DEVICE WIDTH:
-1: 1-7/8 inches (REF)
-2: 1-1/4 inches (REF)
THICKNEST (Assembled at thickest point):
-1: 0.162 ± 0.010 inch.
-2: 0.158 ± 0.010 inch.
OTHER THICKNEST:
BASE (At enamel ring):
-1: 0.075 ± 0.005 inch.
-2: 0.075 ± 0.005 inch.
EAGLE DEVICE (At center of shield):
-1: 0.083 ± 0.005 inch.
-2: 0.081 ± 0.005 inch.
OAK LEAVES DEVICE (At corner of bottom left leaf):
-1: 0.085 ± 0.005 inch.
-2: 0.075 ± 0.005 inch.

ATTACHING DEVICE:
1. Attaching device shall be prong with wing type clutch.

2. -1: three prongs shall be located on a 1-3/4 inch ± 1/64 inch diameter circle.
-2: three prongs shall be located on a 1 inch ± 1/64 inch diameter circle.
-1 and -2: prongs shall be spaced 120 degrees apart with the top prong located on the vertical centerline at the top of the badge.

EPOXY: Epoxy resin shall be applied to the Badge Identification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy.

COLOR	CHIP NUMBER
Ultramarine Blue	18
White	28
Red	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:09Z
Check the source to verify that this is the current version before use.

AREAS:
BASE Outside circle: Color Ultramarine Blue #18
DEVICE:
Background behind stars: Color Red #1
Stripe inside shield: Color Ultramarine Blue #18
Stripe inside shield: Color White #28

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Refer to TIOH drawing number B-5-150 for the location of the 12 piercings:
11 internal piercings:
a. between wings of caduceus and snake heads (2)
b. between neck of eagle and left wing (1)
c. between head of eagle and top of left wing (1)
d. above corner of right shield and lower portion of right wing (1)
e. between lower edge of right wing and top portion of anchor (1)
f. inside lug on top of anchor (1)
g. in and around ropes (4).
1 external piercing: between lower left of shield and right bottom edge of anchor.

3. The eagle device shall be attached to the base by means of a screw post and Type A back plate shown on TIOH Drawing 4-4-89. The screw post shall be made from any type brass. The back plate shall be made from any type of 1/4 inch hard brass. The screw post shall be 0.140 inch ± 0.010 inch long and shall be hard soldered or fused to the device in a location to correctly position the device on the base. The base shall have a 0.130 inch ± 0.003 inch square hole cut through and centered on the base. The oak leaves device may be soldered or attached to the base as determined by the manufacturer.

4. The base shall be lacquered prior to assembly. The devices may be lacquered at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-084)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:09Z
Check the source to verify that this is the current version before use.