INCH-POUND

MIL-DTL-3628/215
26 September 2001

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, TACTICAL UNIT (BORTAC), U.S. BORDER PATROL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

ASSEMBLED

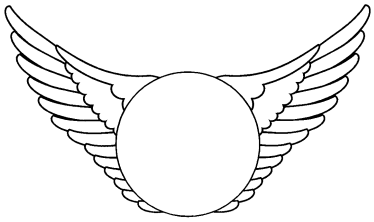

BASE



DEVICE

DASH NO.
-1: Regular Size
-2: Miniature

MATERIAL: Red Brass
Size

FINISH:
BASE: Nickel Plated, Silver Plated, Oxidized, Relieved, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 15.
DEVICE: Gold Plated, Matte Finished, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:

BASE:
HEIGHT:
-1: 1 inch (REF)
-2: 3/4 inch (REF)
WIDTH:
-1: 13/16 inch (REF)
-2: 29/32 inch (REF)
THICKNESS (at thickest point):
-1: 0.080 ± 0.005 inch
-2: 0.075 ± 0.005 inch

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.

DEVICE:
DIAMETER (circumscribed):
-1: 1-1/4 inches (REF)
-2: 7/8 inch (REF)
THICKNESS (at thickest point):
-1: 0.085 ± 0.005 inch
-2: 0.075 ± 0.005 inch

ASSEMBLED:
HEIGHT:
-1: 1-3/4 inches
-2: 15/16 inch
THICKNESS (at thickest point):
-1: 0.150 ± 0.010 inch
-2: 0.133 ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The device shall be superimposed on the base and secured by two rivets or by soft solder. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center of the device. The device shall be located on the base as shown.

3. Attaching device shall be prong and flat ball type clutch. Two prongs shall be located on a horizontal line approximately 5/8 inch from the bottom of the base on -1 and approximately 7/16 inch from the bottom of the base on -2. The prongs shall be equi-distant from each end – approximately 1-1/4 inches apart for -1 and 3/8 inch apart for -2.

Custodians:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0056/002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.