NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/215C(IH)
19 February 2026
SUPERSEDING
MIL-DTL-3628/215B(IH)
1 February 2021

DETAIL SPECIFICATION SHEET


BADGE, IDENTIFICATION, TACTICAL UNIT (BORTAC), U.S. BORDER PATROL

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628



ASSEMBLED

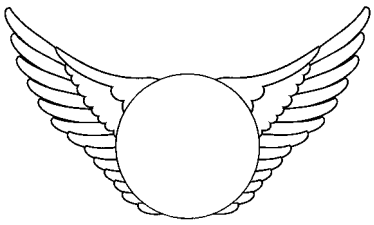


BASE



DEVICE



ASSEMBLED

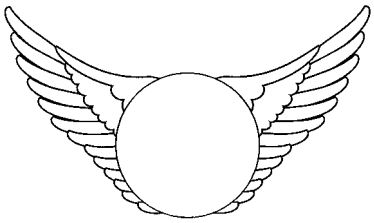

BASE



DEVICE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Nickel Plated, Silver Plated, Oxidized, Relieved, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 15.
DEVICE: 24K Gold Plated, Matte Finished, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
BASE:
HEIGHT:
-1: 1 inch (REF)
-2: 3/4 inch (REF)
WIDTH:
-1: 13/16 inch (REF)
-2: 29/32 inch (REF)
THICKNESS (At thickest point):
-1: 0.080 ± 0.005 inch
-2: 0.075 ± 0.005 inch
DEVICE:
DIAMETER (Circumscribed):
-1: 1-1/4 inches (REF)
-2: 7/8 inch (REF)
THICKNESS (At thickest point):
-1: 0.085 ± 0.005 inch
-2: 0.075 ± 0.005 inch
ASSEMBLED:
HEIGHT:
-1: 1-3/4 inches
-2: 15/16 inch
THICKNESS (At thickest point):
-1: 0.150 ± 0.010 inch
-2: 0.133 ± 0.010 inch

ATTACHING DEVICE:

1. Attaching device shall be prong and wing type clutch.

2. Two prongs shall be located on a horizontal line approximately 5/8 inch from the bottom of the base on -1 and approximately 7/16 inch from the bottom of the base on -2. The prongs shall be equidistant from each end – approximately 1-1/4 inches apart for -1 and 3/8 inch apart for -2.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The device shall be superimposed on the base and secured by two rivets or by soft solder. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center of the device. The device shall be located on the base as shown.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-086)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.