INCH-POUND


MIL-DTL-3628/216
27 December 2001
SUPERSEDING
MIL-DTL-3628/25M (IN PART)
15 November 1996
(See Note 6)

DETAIL SPECIFICATION SHEET


BADGE, QUALIFICATION, EXPLOSIVE ORDNANCE DISPOSAL, ARMY

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.



BASIC

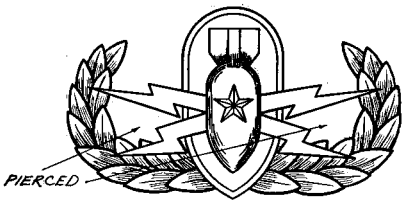

SENIOR



MASTER

DASH NO:

Basic:		
-1 Regular Size	-4 Regular Size, Subdued	-7 Dress Miniature Size
Senior:		
-2 Regular Size	-5 Regular Size, Subdued	-8 Dress Miniature Size
Master:		
-3 Regular Size	-6 Regular Size, Subdued	-9 Dress Miniature Size

MATERIAL:

-1 thru –3, -7 thru -9: Red Brass or Nickel Silver
-4 thru -6: Red Brass

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.

FINISH:

-1 thru –3, -7 thru -9: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Matte Finished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.
--4 thru -6: Dull, Flat, Black Enameled

DIMENSIONS:

HEIGHT (overall):
-1, -2, -4, -5: 1 inch (REF)
-3, -6: 1-7/16 inches (REF)
-7, -8: 1/2 inch (REF)
-9: 3/4 inch (REF)

WIDTH (overall):
-1 thru -6: 1-3/4 inches (REF)
-7 thru -9: 7/8 inch (REF)

THICKNESS (at thickest point):
-1, -4, -8, -9: 0.095 ± 0.010 inch
-2, -3, -5, -6: 0.140 ± 0.010 inch
-7: 0.060 ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Two prongs shall be located at each intersection of the horizontal center line of the badge and the center of each side of the wreath.

3. Piercing shall be as indicated except that piercing around wreath and star applies to regular size badges only.

4. The dull, flat, black enamel for -4 through -6 shall match FED-STD-595, Chip No. 37038.

5. As an alternate method of manufacturing for commercial sale only, -1 through -3 and -7 through -9 may be nickel plated with a mirror-like polished finish matching TIOH Metal Finish Chip Number 16.

6. Other specification sheets which, in addition to MIL-DTL-3628/216, supersede the canceled MIL-DTL-3628/25M are as follows:

MIL-DTL-3628/217 BADGE, QUALIFICATION, EXPLOSIVE ORDNANCE DISPOSAL, AIR FORCE
MIL-DTL-3628/218 BADGE, QUALIFICATION, EXPLOSIVE ORDNANCE DISPOSAL, NAVY AND MARINE CORPS

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0077/001)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.