NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/216D(IH)
20 February 2026
SUPERSEDING
MIL-DTL-3628/216C(IH)
7 August 2025

DETAIL SPECIFICATION SHEET


BADGE, QUALIFICATION, EXPLOSIVE ORDNANCE DISPOSAL, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628.



BASIC

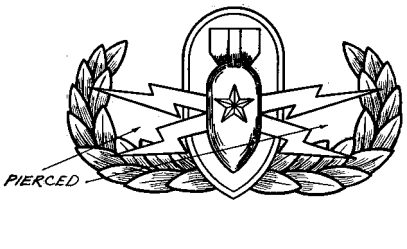

SENIOR

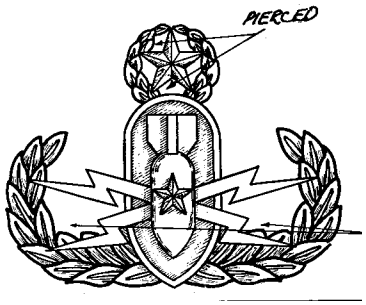

MASTER

DASH NO:
- -1: Basic, Regular Size
- -2: Senior, Regular Size
- -3: Master, Regular Size
- -4: Basic, Regular Size, Subdued
- -5: Senior, Regular Size, Subdued
- -6: Master, Regular Size, Subdued
- -7: Basic, Dress Miniature Size
- -8: Senior, Dress Miniature Size
- -9: Master, Dress Miniature Size

MATERIAL:
-1 thru –3, and -7 thru -9: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No. C-752)

-4 thru -6: Red Brass 85/15 (UNS Alloy C-230)

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.

FINISH:
-1 thru –3, -7 thru -9: Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16. Reverse shall be bright and clean.

-4 thru -6: Dull, Flat Black Enamel Finish and shall match TIOH Metal Finish Chip Number 21.

DIMENSIONS:
HEIGHT (Overall):
-1, -2, -4, -5: 1 inch (REF)
-3, -6: 1-7/16 inches (REF)
-7, -8: 1/2 inch (REF)
-9: 3/4 inch (REF)
WIDTH (Overall):
-1 thru -6: 1-3/4 inches (REF)
-7 thru -9: 7/8 inch (REF)
THICKNESS (At thickest point):
-1, -4, -8, -9: 0.095 ± 0.005 inch
-2, -3, -5, -6: 0.140 ± 0.010 inch
-7: 0.060 ± 0.005 inch

ATTACHING DEVICE:
1. Attaching devices shall be prong and wing clutch type.

2. Two prongs shall be located at each intersection of the horizontal center line of the badge and the center of each side of the wreath.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated except that piercing around wreath and star applies to regular size badges only.

4. -1 through -3 and -7 through -9 Silver Plated Oxidized Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14, May be used for commercial sale.

5. Other specification sheets which, in addition to MIL-DTL-3628/216, supersede the canceled MIL-DTL-3628/25M are as follows:
MIL-DTL-3628/217 BADGE, QUALIFICATION, EXPLOSIVE ORDNANCE DISPOSAL, AIR FORCE
MIL-DTL-3628/218 BADGE, QUALIFICATION, EXPLOSIVE ORDNANCE DISPOSAL, NAVY AND MARINE CORPS

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-124)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:11Z
Check the source to verify that this is the current version before use.