NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/221D(NU)
19 February 2026
Superseding
MIL-DTL-3628/221C(NU)
28 May 2021

DETAIL SPECIFICATION SHEET


BADGE, IDENTIFICATION, POLICE, U.S. NAVY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.



ASSEMBLED

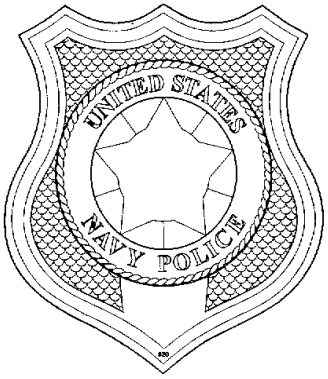

BASE



STAR DEVICE

MATERIAL:
BASE: Gilding Metal 95/5 (UNS Alloy No. C-210)
DEVICE (star with Navy seal): Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Enameled or Epoxied, Gold Plated, Matte Finished, Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
DEVICE: Nickel Plated, Silver Plated, Oxidized, Buffed Relieved, Polished Highlights and shall match TIOH Metal Finish Chip Number 15.

DIMENSIONS:
BASE:
HEIGHT: 2-1/2 inches (REF)
WIDTH: 2-1/4 inches (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:13Z
Check the source to verify that this is the current version before use.

THICKNESS: 0.095 ± 0.005 inch

DEVICE:
DIAMETER (circumscribed): 31/32 inches (REF)
THICKNESS: 0.095 ± 0.005 inch
ASSEMBLED THICKNESS (at thickest point): 0.190 ± 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be prong and wing type clutch.

2. Three prongs shall be located on a 1-3/4 inch ± 1/64 inch diameter circle for -1 and 1-1/8 inch ± 1/64 inch diameter circle for -2. Each prong shall be spaced 120 degrees apart with the bottom prong located on the vertical center line at the bottom of the badge.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Outer edge of the base shall be slightly beveled and polished. Blue, conforming to TIOH Hard Enamel Color Chip Number 20, shall be used inside the gold inner and outer lines edging the shield and, in the words, "UNITED STATES NAVY POLICE."

3. A mock or full forcer may be used to reduce the weight of the badge.

4. The device shall be superimposed and secured to the base by rivets or soft solder as shown. When hard enamel is used on the device, the device shall be soft soldered or riveted to the center platform of the base. When epoxy resin is used on the device, the device shall be attached by using rivets. When rivets are used, they shall be soldered or electronically fused on the horizontal center line and 1/2 inch ± 1/64 inch on centers.

5. The star device shall be lacquered prior to assembly. The base may be lacquered at the option of the manufacturer.

6. Each badge shall be numbered consecutively with the number specified in the procurement document. Numbers shall be 1/8 inch high, engraved, and equally spaced within the unembossed platform area provided on the bottom lower obverse side. Numbers shall be filled with blue soft baked enamel or unstoned epoxy. The blue color shall conform to TIOH Hard Enamel Color Chip Number 20.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:13Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - NU

Preparing activity:
Navy - NU

Review activity:
DLA - CT

(Project No. 8455-2026-089)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:13Z
Check the source to verify that this is the current version before use.