NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/224D
19 August 2022
SUPERSEDING
MIL-DTL-3628/224C
2 July 2021

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARINE SAFETY DEVICE, U.S. COAST GUARD AUXILIARY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

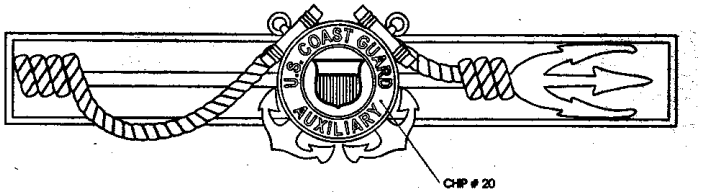

ASSEMBLED

DEVICE



BASE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Gold Plated, Matte Finished, Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
DEVICE: SILVER AREAS (crossed anchors, lettering, inner and outer circular rims): Soft
Enameled or Epoxied, Silver Plated, Matte Finished, Polished Highlights, and shall match TIOH Metal Finish Chip Number 13.
GOLD AREAS (central shield and background around shield): Gold Plated, Matte Finished, Polished Highlights, and shall match the TIOH Metal Finish Chip Number 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
BASE:
HEIGHT (at device mount and rope loops):
-1: 1/2 inch (REF)
-2: 1/4 inch (REF)
WIDTH:
-1: 2-3/4 inches (REF)
-2: 1-3/8 inches (REF)
THICKNESS (at thickest point):
-1: 0.140 ± 0.010 inch
-2: 0.100 ± 0.005 inch
DEVICE:
DIAMETER (circumscribed):
-1: 13/16 inch (REF)
-2: 13/32 inch (REF)
THICKNESS (at thickest point):
-1: 0.085 ± 0.005 inch
-2: 0.075 ± 0.005 inch

ATTACHING DEVICE:
1: Attaching device shall be prong and flat ball type clutch.

2: Two prongs shall be located on the reverse on the horizontal center line. For -1, the prongs shall be 1/4 inch from each side; for -2, the prongs shall be 1/8 inch from each side.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The device shall be superimposed on the base (as shown) and secured by two rivets or by soft solder. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center of the device.

3. Enameled/epoxied areas shall be as shown. Epoxy resin (stoning epoxy) may be at the option of the manufacturer. When hard enamel is used, the material requirement shall be gilding metal. When epoxy is used, the material requirement shall be either red brass or gilding material.

4. Design elements shall be as follows:
BASE:
Trident and rope shall be raised and modeled.
Background shall be recessed and textured.
DEVICE:
Anchors shall be modeled.
Lettering shall read "U.S. COAST GUARD" at the top and "AUXILIARY" at the bottom.
Circular area surrounding the lettering shall be filled with soft enamel or epoxy conforming to TIOH Hard Enamel Color Chip Number 20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - CG1

Preparing activity:
Navy - CG1

Review activity:
DLA - CT

(Project No. 8455-2022-176)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:14Z
Check the source to verify that this is the current version before use.