RR-B-500A
September 25, 1970
SUPERSEDING
Fed. Spec. RR-B-500
January 8, 1965

FEDERAL SPECIFICATION

BOILERS, KETTLES, AND POTS, (ALUMINUM ALLOY)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers requirements for aluminum alloy boilers, kettles, and pots for bakeshop and kitchen use.

1.2 Classification. The boilers, kettles, and pots covered herein shall be of the following types, styles, and sizes, as specified (see 6.2).

Type I - Coffee boiler, 11-quart (fig. 1).
Type II - Double boiler (fig. 2).

Style A - Domestic.

Size 1 - 3-quart.

Style B - Institutional (fig. 3).

Size 1 - 5-1/2-quart.
Size 2 - 8-quart.

Style C - Heavy duty (fig. 4).

Size 1 - 11-quart
Size 2 - 17-1/2-quart.
Size 3 - 8-quart.

Type III - Teakettle, 4-quart (fig. 5).

Type IV - Coffeepot, serving, 4-quart (fig. 6).

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

Type V - Pots, cooking.

Style A - Sauce, domestic, with loop handles (fig. 7).

Size 1 - 14-quart.
Size 2 - 16-quart.

Style B - Sauce, institutional, with loop handles (fig. 8).

Size 1 - 12-quart.

Style C - Stock, institutional, deep, with loop handles (fig. 9).

Size 1 - 11-quart.
Size 2 - 20-quart.
Size 3 - 32-quart.
Size 4 - 40-quart.
Size 5 - 60-quart.

Style D - Open, top, with bail and pouring lip, utility (fig. 10).

Size 1 - 24-quart.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

QQ-A-225/2	-	Aluminum Alloy Bar, Rod, and Wire; Rolled, Drawn, or Cold Finished, 3003.
QQ-A-225/7	-	Aluminum Alloy Bar, Rod, and Wire; Rolled, Drawn, or Cold Finished, 5052.
QQ-A-225/8	-	Aluminum Alloy Bar, Rod, Wire, and Special Shapes; Rolled, Drawn, or Cold Finished, 6061.
QQ-A-250/2	-	Aluminum Alloy, 3003, Plate and Sheet.
QQ-A-250/8	-	Aluminum Alloy, 5052, Plate and Sheet.
QQ-W-423	-	Wire, Steel Corrosion-Resisting.
PPP-A-1182	-	Aluminumware: Bakeshop and Kitchen Packaging, Packing and Marking of.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Businsss Service Centers at the General Services Administration Regional Offices, in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by attributes.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Sanitation Foundation (NSF):

Standard No. 2 - Food Service Equipment.

Listing of Food Service Equipment.

(Application for copies should be addressed to the National Sanitation Foundation, P.O. Box 1468, Ann Arbor, Michigan 48106.)

American Society for Testing and Materials (ASTM) Standard:

Specification A167-63 - Corrosion-Resisting Chromium-Nickel Steel Plate, Sheet and Strip.
Specification A176-63 - Corrosion-Resisting Chromium Steel Plate, Sheet and Strip.
Specification B209-69 - Aluminum Alloy Sheet and Plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19106.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. This specification contains provisions for first article test and approval (see 4.2, 6.2 and 6.3).

3.2 Standard product. The boilers, kettles, and pots shall be current standard models of the manufacturer except for any changes necessary to comply with specification requirements.

3.3 Standards compliance. Aluminumware covered by this specification, except type I; type II, style A; types III and IV; and type V, style A, shall conform to the applicable requirements of NSF Standard No. 2.

3.3.1 NSF certification. The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the boilers, kettles, and pots he proposes to furnish under this specification meets the applicable requirements of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished boilers, kettles, and pots shall be submitted prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment, or

(2) A certification for the boilers, kettles, and pots issued by NSF under their special one-time contract evaluation/certification service shall be submitted prior to approval of the preproduction sample, if one is submitted or prior to approval of the first shipment, or

(3) A certified test report from a recognized independent testing laboratory acceptable to the medical authority functioning in advisory capacity to the preparing agency of the specification indicating that the boilers, kettles, and pots have been tested and conform to NSF Standard No. 2 shall be submitted prior to the approval of the preproduction sample, if one is submitted, or prior to commencing production.

3.4 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for boilers, kettles, and pots, provided the completed items comply with all provisions of the specification.

3.4.1 Aluminum alloy plate and sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.4.1.1 Alloy 5052. Aluminum alloy 5052 plate and sheet shall conform to QQ-A-250/8.

3.4.1.2 Alloy 3003. Aluminum alloy 3003 plate and sheet shall conform to QQ-A-250/2.

3.4.1.3 Alloy 3004. Aluminum alloy 3004 sheet and plate shall conform to ASTM B209-69.

3.4.2 Aluminum alloy bar, rod, shapes, and wire.

3.4.2.1 Alloy 5052. Aluminum alloy 5052, bar, rod, shapes, and wire shall conform to QQ-A-225/7.

3.4.2.2 Alloy 3003. Aluminum alloy 3003, bar, rod, shapes, and wire shall conform to QQ-A-225/2.

3.4.2.3 Alloy 6061. Aluminum alloy 6061, bar, rod, shapes, and wire shall conform to QQ-A-225/8.

3.4.3 Alclad alloy 3003. Aluminum alclad alloy 3003 sheet and plate shall conform to ASTM B209-69.

3.4.4 Corrosion-resisting steel sheet and plate. Corrosion-resisting steel sheet and plate shall conform to type 302 or 304 of ASTM A167-63 or type 430 of ASTM A176-63.

3.4.5 Corrosion-resisting steel wire. Corrosion-resisting steel wire shall conform to QQ-W-423.

3.5 Construction. Figures shown for the aluminumware are illustrative only, and are not intended to preclude any commercial design otherwise conforming to specification requirements.

3.5.1 Metal thickness. All metal thicknesses and diameters specified hereinafter shall mean thickness or diameter after fabrication, except a five percent minus tolerance shall be allowed and material having metal thicknesses and diameters greater than specified herein shall be acceptable. Thickness dimensions specified hereinafter shall be the sidewall or bottom thickness of the aluminumware and not the bead thickness or the thickness of the curved section where the sidewall meets the bottom.

3.5.2 Handles. All loop handles shall have a minimum width of 4 inches and a minimum clearance of 1 inch from the body of the aluminumware. All handles shall be formed to a shape or contour to provide a good handgrip and, unless otherwise specified herein, shall be either riveted or welded

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

to the utensil. There shall be no failure of rivets or welds, or permanent deformation of the handles when the aluminumware is tested as specified in 4.4.1.

3.5.3 Capacities. Capacities shall be as specified except a plus tolerance of 10 percent shall be permissable (see 4.4.2).

3.5.4 Rivets. The rivets used shall be brazier (low profile) head rivets and shall be drawn close with smooth rounded heads on both sides and shall not be split.

3.5.5 Welds. Spot welding shall be performed by a welding machine capable of consistent reproduction of timed welds. Continuous type gas and electric arc welds shall be ground and dressed.

3.6 Finish. The finish for all end items and components of items covered by this specification shall be in accordance with the manufacturer's standard commercial practice.

3.7 Marking for identification. The items shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be determined. Capacities shall be conspicuously, legibly, and permanently marked on each individual item of aluminumware.

3.8 Detailed requirements.

3.8.1 Type I, coffee boiler. The coffee boiler shall be of 11-quart capacity.

3.8.1.1 Body. The body shall be 0.102 inch thick and shall be formed seamless from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3.



FIG. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.8.1.2 Spout. The spout shall be 0.102 inch thick and shall be formed from a single piece of aluminum alloy as specified in 3.4.1.2 or 3.4.1.3. The wall of the body within the spout shall be cut out or perforated. The spout shall be welded to the body and shall be fitted with a two-piece cover consisting of a stationary member and a hinged member. The hinged member of the spout cover shall be attached to the stationary member by an aluminum alloy hinge riveted in place.

3.8.1.3 Loop handle. The loop handle shall have a diameter of 0.2437 inch and shall be formed from a single piece of corrosion-resisting steel wire specified in 3.4.5 or tin-coated steel wire located diametrically opposite the pouring spout near the bottom of the boiler.

3.8.1.4 Bail. The bail shall have a diameter of 0.207 inch and shall be formed from a single piece of corrosion-resisting steel wire specified in 3.4.5 or tin-coated steel wire. The bail shall be provided with a hardwood grip, 1 inch in diameter and 3-11/16 inches long.

3.8.1.5 Ears. Each ear shall be 0.1093 inch thick and shall be formed from a single piece of corrosion-resisting steel specified in 3.4.4 and attached to the boiler by aluminum rivets. Three rivets shall hold each ear and the bail hook shall be closed on the ears.

3.8.1.6 Cover. The cover shall be 0.057 inch thick and shall be formed seamless into a dome shape from a single piece of aluminum alloy specified in 3.4.1.2. A strap handle, having a thickness of 0.064 inch, shall be formed from a single piece of aluminum alloy specified in 3.4.1.2. The strap handle shall be attached to the cover by spot welding.

3.8.2 Type II, double boiler.

3.8.2.1 Style A, domestic. The domestic double boiler shall have an inside pan capacity of 3-quarts. The outside and inside pan shall be 0.040 inch thick. Each shall be formed seamless from a single piece of aluminum alloy specified in 3.4.1.2. The outside pan shall have a capacity of 4-3/8 quarts.




FIG. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.8.2.1.1 Handles. The body of both the inside and outside pan shall be fitted with a long handle, 0.050 inch thick by not less than 1 inch wide. The handles shall be formed from a single piece of corrosion-resisting steel specified in 3.4.4, or zinc-plated or tin-coated steel.

3.8.2.1.2 Cover. The cover for the double boiler shall be 0.032 inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2. The cover shall be fitted with a knob made of molded thermosetting or phenolic plastic material securely attached to the center of the cover.

3.8.2.2 Style B, institutional. The size 1 and size 2 institutional double boilers shall have inside pan capacities of 5-1/2 and 8-quarts, respectively. The outside pan capacity shall be that normally furnished by the manufacturer for the size specified.



FIG. 3

3.8.2.2.1 Inside pan. The 5-1/2 quart pan shall be 0.064 inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2. The sidewall shall have a rolled portion which shall form a shoulder. The 8-quart pan shall be 0.081 inch thick and shall be formed seamless from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3. The sidewall shall have a rolled portion which shall form a shoulder.

3.8.2.2.2 Loop handles. The inside pan shall be fitted with two loop handles located at points diametrically opposite to each other. The loop handles shall be aluminum alloy as specified in 3.4.2.2 or 3.4.2.3, corrosion-resisting steel wire specified in 3.4.5, or tin-coated or zinc-plated steel wire. The aluminum alloy handles for the 5-1/2-quart pan shall be 0.312 inch diameter and for the 8-quart pan shall be 0.375 inch diameter. The steel handles shall be 0.2253 inch diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.8.2.2.3 Outside pan. The outside pan for the 5-1/2-quart size shall be 0.081 inch thick and shall be formed seamless from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3. The outside pan for the 8-quart size shall be 0.081 inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.1, 3.4.1.2 or 3.4.1.3.

3.8.2.2.4 Loop handles. The outside pan shall be fitted with two loop handles located at points diametrically opposite to each other. The loop handles shall be aluminum alloy rod as specified in 3.4.2.2, corrosion-resisting steel wire as specified in 3.4.5, or tin-coated or zinc-plated steel wire. The aluminum alloy handles for the 5-1/2-quart size pan shall be 0.312 inch diameter and for the 8-quart size pan shall be 0.375 inch diameter. The steel handles shall be 0.2253 inch diameter. The aluminum alloy handles may be attached by brazing.

3.8.2.2.5 Cover. The cover for the 5-1/2-quart double boiler shall be 0.032 inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2 or 3.4.1.3. The cover for the 8-quart size shall be 0.051 inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.1, 3.4.1.2, or 3.4.1.3. The covers shall be fitted with an aluminum alloy handle, a tinned steel handle, or a knob made of molded thermosetting or phenolic plastic material, securely attached to the center of the cover. The cover shall have a smoothly finished edge with no bead.

3.8.2.3 Style C, heavy duty. The size 1, 2, and 3 heavy duty double boilers shall have inside pan capacities of 11, 17-1/2, and 8-quarts, respectively. The outside pan capacity shall be that normally furnished by the manufacturer for the size specified.




FIG. 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.8.2.3.1 Inside pan. The inside pan shall be 0.081 inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2 or 3.4.1.3.

3.8.2.3.2 Loop handles. The inside pan shall be fitted with two loop handles located at points diametrically opposite to each other. The loop handles shall be a single piece of aluminum alloy rod as specified in 3.4.2.2 or 3.4.2.3, corrosion-resisting steel wire as specified in 3.4.5, or tin-coated or zinc-plated steel wire. The aluminum alloy handles shall be 0.375 inch diameter. The steel handles shall be 0.2253 inch diameter.

3.8.2.3.3 Outside pan. The outside pan for the 11, 17-1/2, and 8-quart size shall be formed seamless from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3. The top and bottom shall be 0.187 inch thick and the sidewall thickness may gradually decrease to not less than 0.109 inch.

3.8.2.3.4 Loop handles. The outside pan shall be fitted with two loop handles located at points diametrically opposite to each other. The loop handles shall be aluminum alloy rod as specified in 3.4.2.2, corrosion-resisting steel wire as specified in 3.4.5, or tin-coated or zinc-plated steel wire. The aluminum alloy handles shall be 0.438 inch diameter. The steel handles shall be 0.2253 inch diameter. The aluminum alloy handles may be attached by brazing.

3.8.2.3.5 Cover. The cover shall be 0.064 inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2, or 3.4.1.3. The cover shall have a smooth finished edge with no bead. The cover shall be fitted with a molded thermosetting, or phenolic plastic material, or an aluminum alloy or tin-coated steel handle securely attached to the cover.

3.8.3 Type III, teakettle. The teakettle shall be of 4-quart capacity.

3.8.3.1 Body. The body shall be 0.064 inch thick and shall be formed seamless from a single piece of aluminum alloy specified in 3.4.1.2 or aluminum alclad alloy specified in 3.4.3. The bottom shall be embossed inward to prevent outward bulging.



FIG. 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.8.3.2 Spout. The spout shall be 0.064-inch thick and shall be formed from a single piece of aluminum alloy specified in 3.4.1.2 or aluminum alclad alloy specified in 3.4.3. The spout shall be brazed or welded to the kettle body.

* 3.8.3.3 Handle. The handle shall be a bail type as shown on figure 5, or shall be a cantilever type.

3.8.3.3.1 Bail handle. The bail handle shall be stationary made from aluminum alloy wire specified in 3.4.2.1. The bail shall be riveted or spotwelded to the kettle. As an alternate the bail shall be made from flattened corrosion-resisting steel wire as specified in 3.4.5 or tin-coated steel wire and shall be attached by two ears which shall be riveted or spotwelded to the teakettle.

* 3.8.3.3.2 Cantilever handle. The cantilever handle shall be made from a thermosetting or phenolic plastic material and attached to the kettle by two stainless steel screws.

3.8.3.3.3 Handle grip. The handle grip of the bail type shall be made of thermosetting or phenolic plastic material molded to the handle or shall be in two sections fastened to the handle by two nickel-plated steel screws or by cadmium-plated or hollow brass rivets.

3.8.3.3.4 Cover. The cover shall be 0.032-inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2. The cover shape shall blend in with the curvature of the kettle. The cover shall have a flange and lip formed so as to prevent it from falling off when the kettle is tilted. The cover shall be provided with a knob of thermosetting or phenolic plastic material, securely attached to the center of the cover.

3.8.4 Type IV, coffeepot, serving. The coffeepot shall be of 4-quart capacity. The body shall be 0.040-inch thick and shall be formed seamless from a single piece of aluminum alloy specified in 3.4.1.2. The area enclosed by the spout shall be perforated. The top edge shall be finished with a tightly flattened bead.



FIG. 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.8.4.1 Spout. The spout shall be 0.051-inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2. The spout shall be brazed or welded to the body.

3.8.4.2 Handle. The pot shall be fitted with a molded thermosetting or phenolic plastic handle located diametrically opposite the spout and engaged in aluminum alloy brackets or sockets, securely riveted or spotwelded to the body of the pot.

3.8.4.3 Cover. The cover shall be 0.032-inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2. The cover shall be flanged to form a skirt which shall provide a friction fit in the top of the pot. The cover shall be fitted with a molded thermosetting or phenolic plastic handle securely attached to the center of the cover by screws or rivets.

3.8.5 Type V pots, cooking.

3.8.5.1 Style A, sauce, domestic, with loop handles. The size 1 and size 2 domestic sauce pots shall be of 14- and 16-quart capacity, respectively. The body shall be 0.040-inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2. The top edge may be provided with or without a bead.




FIG. 7

3.8.5.1.1 Handles. The pot shall be fitted with two loop handles having a diameter of 0.2437-inch and formed from a single piece of corrosion-resisting steel wire as specified in 3.4.5 or tin-coated steel wire. The handles shall be located at a point diametrically opposite each other.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.8.5.1.2 Cover. The cover shall be 0.032-inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2. The cover shall be fitted with a molded thermosetting or phenolic plastic material knob, securely attached by an aluminum alloy rivet or screw.

3.8.5.2 Style B, sauce, institutional, with loop handles. The institutional saucepot shall be of 12-quart capacity. The body shall be formed seamless from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3. The top and bottom shall be 0.187-inch thick and the sidewall thickness may gradually decrease to not less than 0.109 inch.

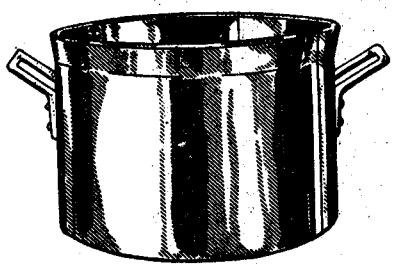


FIG. 8

3.8.5.2.1 Handles. The pot shall be fitted with two loop handles located at points diametrically opposite each other. The loop handles shall be aluminum alloy rod as specified in 3.4.2.2, corrosion-resisting steel wire specified in 3.4.5, or tin-coated or zinc-plated steel wire. The aluminum alloy handles shall be 0.437-inch diameter. The steel handles shall be 0.4615-inch diameter. The aluminum alloy handles may be attached by brazing.

3.8.5.2.2 Cover. Unless otherwise specified (see 6.2), a cover shall be provided with the saucepot. The cover shall be 0.081-inch thick and shall be formed from aluminum alloy as specified in 3.4.1.1, 3.4.1.2, or 3.4.1.3. The cover shall be approximately 0.093-inch smaller than the inside diameter of the saucepot. The top edge shall be finished smooth.

* 3.8.5.2.2.1 Handle. The cover shall be fitted with a handle formed from a single piece of aluminum alloy specified in 3.4.2.2 or tinned steel. The aluminum alloy handle shall be 0.125-inch thick by 0.750-inch wide, and the tinned steel handle shall be 0.0625-inch thick by 0.750-inch wide.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

* 3.8.5.3 Style C, stock, institutional, with loop handles. The size 1, 2, 3, 4, and 5 stock pots shall be of 11-, 20-, 32-, 40-, and 60-quart capacity, respectively. The body shall be formed seamless from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3. The top and bottom of the 11- and 20-quart pots shall be 0.187-inch thick, and the sidewall thickness may gradually decrease to not less than 0.109-inch. The top and bottom of the 32-, 40-, and 60-quart pots shall be 0.218-inch thick, and the sidewall thickness may gradually decrease to not less than 0.109-inch.

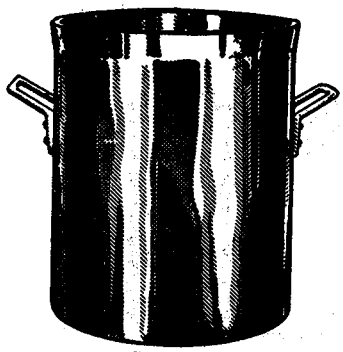


FIG. 9

3.8.5.3.1 Loop handles. The pots shall be fitted with two loop handles located at points diametrically opposite each other and shall be aluminum alloy rod as specified in 3.4.2.2, corrosion-resisting steel as specified in 3.4.5, or tin-coated or zinc-plated steel wire. The aluminum alloy handle shall be 0.437-inch diameter for the 11- and 20-quart pots, 0.562-inch diameter for the 32- and 40-quart pots, and 0.625-inch diameter for the 60-quart pot. The steel handles shall be 0.435-inch diameter for the 11- and 20-quart pots, 0.500-inch diameter for the 32- and 40-quart pots, and 0.562-inch diameter for the 60-quart pot. The aluminum alloy handles may be attached by brazing.

3.8.5.3.2 Cover. Unless otherwise specified (see 6.2), a cover shall be provided with the stock pots. The cover shall be 0.081-inch thick aluminum alloy and shall be formed from aluminum alloy as specified in 3.4.1.1, 3.4.1.2, or 3.4.1.3. The cover shall be approximately 0.093-inch smaller than the inside diameter of the stock pot. The top edge shall be finished smooth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

* 3.8.5.3.2.1 Handle. The cover shall be fitted with a handle formed from a single piece of aluminum alloy specified in 3.4.2.2 or tinned steel. The aluminum alloy handle shall be 0.125-inch thick by 0.750-inch wide, and the tinned steel handle shall be 0.0625-inch thick by 0.750-inch wide.

3.8.5.4 Style D, open top, with bail and pouring lip, utility. The style D cooking pot shall be of 24-quart capacity. The body shall be 0.072-inch thick and shall be formed seamless from a single piece of aluminum alloy as specified in 3.4.1.2 or 3.4.1.3. The top edge shall be finished with or without a pouring lip.




FIG. 10

3.8.5.4.1 Handle. When a pouring lip is provided, the pot shall be fitted with a loop handle opposite the lip. The loop handle shall be 0.2253-inch diameter and shall be formed from corrision-resisting steel wire as specified in 3.4.5 or tin-coated steel wire.

3.8.5.4.2 Bail. The bail shall have a diameter of 0.243-inch and shall be made from a single piece of corrosion-resisting steel wire as specified in 3.4.5 or tin-coated steel wire. The bail shall be attached to the body by means of two ears. The bail may be provided with or without a grip. If a grip is used, the grip shall be sealed to the bail.

3.8.5.4.3 Ears. The pot shall be fitted with two ears, each having a thickness of 0.067-inch and each formed from a single piece of corrosion-resisting steel as specified in 3.4.4 or tin-coated steel. Each ear shall be secured to the body with not less than three aluminum rivets. The ears shall be embossed in such a manner as to permit the bail to stand in an upright position or in a horizontal position, without resting on the body of the pot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The finished aluminumware shall be clean and well made and shall conform to the quality and grade of product established by this specification. All sharp edges, slivers, and burrs shall be removed. All deep scratches and tool marks on exterior and interior surfaces shall be removed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. When a preproduction sample is required, it shall be examined for defects in table I and for compliance with dimensions specified and tested as specified in 4.4.1 and 4.4.2. Failure to pass any test shall be cause for rejection of the preproduction sample. The presence of any defects listed in table I or any dimension not within specified requirements shall be cause for rejection of the preproduction sample.

4.3 Inspection. Sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

* 4.3.1 Components and materials inspection. In accordance with 4.1 components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End item inspection. The inspection lot shall consist of all items of one type, style, and size offered for inspection at one time. The sample unit for this inspection shall be one completely finished boiler, kettle, or pot, as applicable.

4.3.2.1 Visual examination. Examination shall be made of the end item for defects listed in table I. The inspection level shall be II with acceptable quality levels (AQL's) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defects	Classification Major	Minor
Finish	Not finished as specified.	X	
	Area of rust or corrosion.	X	
	Stained or discolored.		X
Design	Any characteristic not in accordance with specified requirements.	X	
Construction and workmanship (general)	Any component missing or not specified type.	X	
	Any component fractured, split, buckled, bent, punctured, malformed, or otherwise impaired.	X	
	Functioning component inoperative or will not function as intended.	X	
	Deep scratch or tool mark on interior surface, clearly noticeable.	X	
	Scratched, pitted, or tool mark on exterior surfaces.		X
	Any sharp edge, sliver or burr.	X	
Handles or bails (as applicable)	Not attached as specified or poorly accomplished.	X	
Welding and brazing (where required)	Not type specified.		X
	Missing, incomplete, burn holes, cracked, fractured, or not fused.	X	
	Slag inclusion, undercut, not smooth and uniform, scale or flux deposit not removed.		X
Beading (where required)	Omitted or not as specified.	X	
	Not even.		X
Marking	Missing, not legible.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.3.2.2 Dimensional examination. Inspection shall be made of the aluminumware for conformance with dimensions specified herein. Any nonconformance with specified requirements shall be classified a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.2.3 Testing of the end item. Handles shall be tested as specified in 4.4.1. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units. When no preproduction sample is required, one production unit from the initial lot shall be tested as specified in 4.4.2 with nonconformance cause for rejection of the lot.

4.3.3 Standards compliance. Proof of compliance with the requirements of 3.3 shall be submitted to the Government representative.

4.3.4 Examination of preparation for delivery. An examination shall be made to determine that preparation for delivery as specified in section 5 of this specification is in conformance with PPP-A-1182.

4.4 Tests.

4.4.1 Handles. The item shall be loaded with weights equivalent to 1-1/4 times the weight of the water the item is intended to hold and lifted by the handles to a position of normal use. The handles shall be examined for conformance with 3.5.2. Nonconformance with handle strength requirements shall constitute failure of this test.

4.4.2 Capacity. The item shall be filled to capacity with water and the water measured to determine compliance with 3.5.3. Nonconformance with requirements shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Levels A, B and C. Packaging, packing, and marking for each level of protection shall be in accordance with the applicable requirements of PPP-A-1182 (see 6.2).

6. NOTES

6.1 Intended use. The boilers, kettles, and pots covered herein are intended for use in domestic and institutional kitchens and bake-shops.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents, as applicable (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

(a) Title, number, and date of this specification.
(b) Type, style, and size required (see 1.2).
(c) First article (see 3.1, 4.2, and 6.4).
(d) When a cover is not required for the sauce pot or stock pots (see 3.8.5.2.2 and 3.8.5.3.2).
(e) Selection of applicable levels of packaging and packing (see 5.1).

6.3 First article. The item covered by this specification requires first article test and approval under the appropriate provisions of paragraph 7-104.55 of the Armed Services Procurement Regulations. The first article should be a preproduction sample. The first article should consist of one unit. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examination, test, and approval of the first article.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MC, MS

User activity:

Navy - CG

Preparing activity:

Army - GL

CIVIL AGENCY INTEREST:

GSA-FSS
COM
HEW
AGRI
VA-DMS

Project No. 7330-0310

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

RR-B-500A; Boilers, Kettles and Pots (Aluminum Alloy).

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.