RR-C-531D
November 2, 1971
SUPERSEDING
Fed. Spec. RR-C-531C
July 7, 1967

FEDERAL SPECIFICATION

COLANDER, CORROSION-RESISTING STEEL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers a 16 quart corrosion-resisting steel colander with handles.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

L-P-378	-	Plastic Sheet and Strip, Thin Gauge, (Polyolefin).
PPP-B-636	-	Box, Fiberboard.

Federal Standard:

FED-STD-123	-	Marking for Domestic Shipment (Civil Agencies).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of U.S. Military Property.
MIL-STD-147	-	Palletized and Containerized Unit Loads, 40" X 48" Pallets, Skids, Runners, or Pallet-Type Base.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Sanitation Foundation (NSF)

Standard No. 2 - Food Service Equipment.

Listing of Food Service Equipment.

(Application for copies should be addressed to the National Sanitation Foundation, P.O. Box 1468, Ann Arbor, Mich. 48106.)

American Society for Testing and Materials (ASTM)

A167 - Specification for Corrosion-Resisting, Chromium-Nickel Steel Plate, Sheet and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Standard product. The colanders delivered under this specification shall be the manufacturer's commercially current standard product except for any changes necessary to comply with specification requirements.

3.2 Standards compliance. The colanders covered by this sepcification shall conform to the applicable requirements of NSF Standard No. 2.

3.2.1 NSF certification. The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the colanders he proposes to furnish under this specification meet the applicable requirements of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished colander shall be submitted prior to approval of the first shipment, or

(2) A certification for the colander issued by NSF under their special one time evaluation/certification service shall be submitted prior to approval of the first shipment, or

(3) A certified test report from a recognized independent testing laboratory acceptable to the medical authority functioning in advisory capacity to the preparing agency of the specification, indicating that the colanders have been tested and conform to NSF Standard No. 2 shall be submitted prior to commencing production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.3 Materials. The materials specified shall conform to the applicable specifications and standards specified herein. Material not definitely specified shall be of the quality normally used for the purpose in the manufacturer's current commercially available colander.

3.3.1 Steel, corrosion-resisting. Corrosion-resisting steel shall conform to type 302 or 304 of ASTM A167-63.

3.4 Design. The colander shall consist of a perforated body, a foot, and two handles and shall be similar to figure 1. The configuration shown in figure 1 is illustrative only and is not intended to preclude procurement of colanders otherwise meeting all the requirements of this specification.

3.5 Construction. The colander shall conform to the dimensions and welding requirements of figure 1 and the requirements specified herein. The body and foot shall each be constructed without seams from a single piece of corrosion-resisting steel specified in 3.3.1, and shall have a finished thickness of not less than 0.0281 inch. The foot and handles shall be either continuously welded or spot welded to the body. When the foot is spotwelded to the body, a minimum of 16 equally spaced welds are required. The junctions between the handles and the body, and the foot and the body, shall be completely sealed. The top of the colander body shall be parallel to the bottom of the colander foot with a tolerance not to exceed 1/8 inch when tested for uniformity of height as specified in 4.3.1. The bottom flange of the colander foot shall be level with a tolerance not to exceed 1/16 inch when tested for levelness as specified in 4.3.2. The handles, body, and foot of the colander shall not separate, break, or permanently deform when tested for strength as specified in 4.3.3.

3.5.1 Body. The body shall be hemispherical in shape with a flanged top having a half-round open bead edge. The body shall be perforated as shown in figure 1. There shall be no perforations on that portion of the body covered by the foot. The number of perforations shall be in accordance with the manufacturer's standard product. The diameter of the perforation shall be not less than 5/32 inch.

3.5.2 Foot. The foot shall be as shown on figure 1 or may be the manufacturer's standard design provided that the bottom is flanged and has a half-round open bead edge.

3.5.3 Handles. The handles shall each be fabricated from a single piece of corrosion-resisting steel seamless or welded tubing or strip conforming to 3.3.1. The handles shall be the manufacturer's standard design.

3.6 Finish. All fabrication marks shall be removed and all exposed surfaces shall have a 2B standard finish or better.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.7 Marking for identification.

3.7.1 Military agencies. The letters "U.S." and the manufacturer's name or trademark of such known character, easily identifiable with said manufacturer shall be permanently and legibly indented on the outside surface of the colander in accordance with MIL-STD-130.

3.7.2 Civil agencies. Each colander shall be marked in accordance with the manufacturer's commercial practice.

3.8 Welding. All spot welds shall be sound with no visible evidence of surface burning. Fusion welds shall be continuous, smooth, and free of cracks, inclusions, and undercuts.

3.9 Workmanship. The colanders shall be clean and free of dents, sharp edges, slivers, and burrs. There shall be no cracks, fractures, punctures, or deformations. Inside surfaces, opposite outside indented markings, shall show no visible evidence of uneveness, penetration, or distortion. There shall be no visible discoloration of the components.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End item inspection. A lot shall consist of all colanders offered for inspection at one time. The sample unit shall be one completely fabricated colander.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.2.2.1 Dimensional examination. Examination shall be made for dimensions specified. Any nonconformance shall be considered a defect. The inspection level shall be S-3 with an acceptable quality level (AQL) of 6.5 expressed in terms of defects per hundred units.

4.2.2.2 Visual examination. Examination shall be made of the completely fabricated colander for the defects shown in table I. The inspection level shall be level I with an AQL of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish	Not a 2B standard finish or better	X	
	Fabrication marks not removed		X
	Area of rust	X	
Construction and workmanship (overall)	Burr or sharp edge	X	
	Damaged or malformed	X	
	Dent		X
	Wavy, wrinkled, or buckled	X	
	Not clean (dirt, grease, graphite)	X	
	Discoloration		X
Welding (where required)	Not type specified	X	
	Cracked or fractured	X	
	Not fused	X	
	Not smooth, flash or splatter not removed, undercut, pitted	X	
Body	Not made from single piece	X	
	Not perforated as specified	X	
	Bead not uniform; not half-round open bead		X
Foot	Not made from single piece	X	
	Not welded to body	X	
	Not minimum number of spot welds specified		X
	Junction of foot and body not sealed	X	
	Bead not uniform		X
	Perforations covered by foot	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defect	Classification	
		Major	Minor
Welding (where required)(cont'd)			
Handles	Missing	X	
	Not welded to body	X	
	Junction of handle and body not sealed	X	
Marking (when applicable)	Omitted, illegible, incomplete, not located on outside		X
	Penetration	X	
	Distortion		X

4.2.2.3 End item testing. The colanders shall be tested as specified in 4.3.1, 4.3.2, and 4.3.3. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

4.2.3 Standard compliance. Proof of compliance with the requirements of 3.3 shall be submitted to the Government representative.

4.2.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking comply with the requirements of section 5. Defects shall be in accordance with table II. The lot shall be the number of containers offered for inspection at one time. The sample unit shall be one shipping container fully prepared for delivery except it need not be sealed. The inspection level shall be S-4 and the AQL shall be 4.0 expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings (exterior and interior)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Components missing or damaged.
Contents	Number per carton is not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.2.4.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping, shall be in accordance with PPP-B-636.

4.2.4.2 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be as indicated in table III. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5, expressed in terms of defects per hundred units.

TABLE III. Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.3 Tests.

4.3.1 Uniformity of height. Place the colander in an upright position on a level base. Measure the height of the colander from the base to the top of the body at four points 90°±5° apart, to determine conformance with the uniformity of height requirements specified in 3.5. Inability to meet requirements shall constitute failure of this test.

4.3.2 Levelness. Place the colander in an upright position on a level base. Attempt to insert a 1/16 inch feeler gage between the level base and the bottom of the colander foot at four points 90°± 5° apart, to determine conformance with the levelness requirements specified in 3.5. Failure to meet requirements shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.3.3 Strength. Place a 34-pound weight in the colander. Raise the weighted colander by the handles to a height of at least one foot. Remove the weight and examine the colander, to determine conformance with the strength requirements specified in 3.5. Failure to meet requirements shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each colander shall be placed in a polyethylene bag. The polyethylene film shall be 0.002 inch thick conforming to type II, grade A, B, or C, finish 1 or 2 of L-P-378. The mouth end of the bag, when prepared for closure, shall extend a minimum of 5 inches beyond the packaged item. Closure of the bag shall be accomplished by double folding the plastic material at the mouth and taping it to the bag body with pressure-sensitive tape or heat sealing. Each bagged colander shall then be packaged in a snug-fitting, end-opening, fiberboard box conforming to style RSC, type CF, variety SW or type SF, class domestic of PPP-B-636. Each box shall be closed in accordance with the appendix of PPP-B-636.

5.1.2 Level C. Colanders shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Four colanders, packaged as specified in 5.1, shall be packed in the most compact manner in a snug-fitting fiberboard shipping container conforming to style RSC, V3s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Unless otherwise specified (see 5.2.2.1), four colanders, packaged as specified in 5.1, shall be packed in the most compact manner in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 200 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be V3c, V3s or V4s, fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Colanders, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification as applicable.

5.3 Palletization (Military requirements). Unless otherwise specified (see 6.2) colanders packed as specified shall be palletized in accordance with Load Type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with FED-STD-123.

5.4.2 Military agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The colanders are intended for straining food in fixed messes, field kitchens, and galleys.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(c) Whether weather-resistant class fiberboard shipping containers are required for level B shipment (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

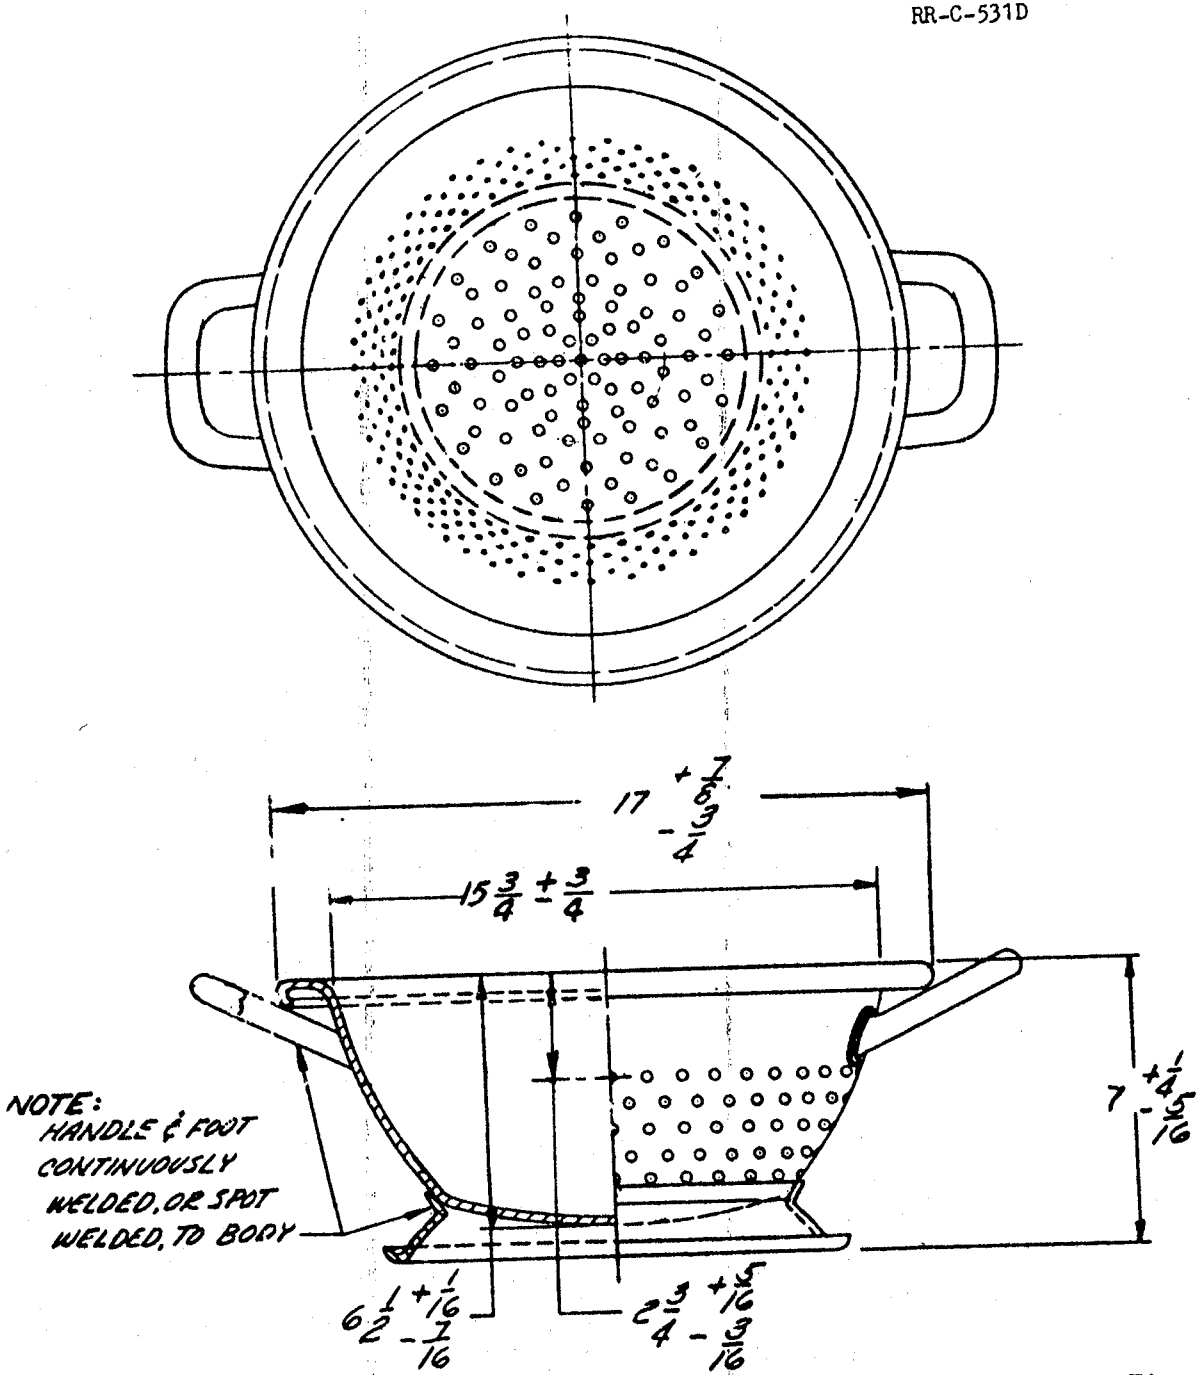


FIGURE 1·COLANDER, CORROSION-RESISTING STEEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MC, MS, CG
Air Force - 45

User activity:

Navy - YD

Preparing activity:

Army - GL

CIVIL AGENCIES INTEREST:

GSA-FSS
AGRI
HEW
VA

Project No. 7330-0296

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.