RR-C 910/2
December 11, 1980
SUPERSEDING
MS39229
February 21, 1973

FEDERAL SPECIFICATION SHEET

CYLINDER, COMPRESSED GAS:

DOT SPECIFICATIONS 4BA, 4BW, AND 4E

LIQUIFIED PETROLEUM GAS AND FUEL GAS MIXTURES

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the cylinder described herein shall consist of this document and the latest issue of Specification RR-C-910.

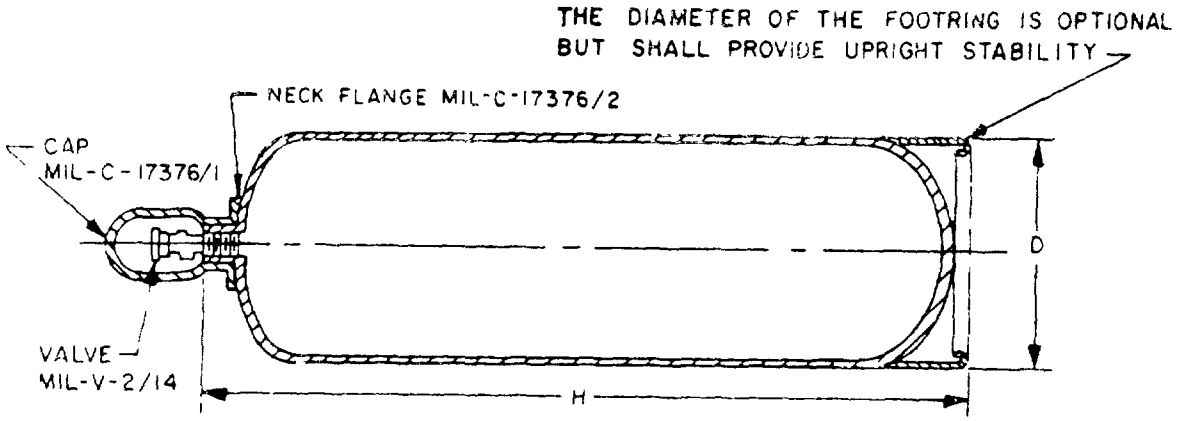


FIGURE 1.

X-3202A

FSC 8120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

TABLE I.

Classification Number	Water Cap. lbs.	Max. Filling Density Lbs. Propane	Butane	Fuel	Service Pressure	Dimensions D	H	Max. Tare lbs Steel	Aluminum
C910/2-1	60	25	30	-	240	12-1/2	16-1/2	25	15
C910/2-2	96	40	48	-	240	12-1/2	28	40	25
C910/2-3	240	100	120	-	240	14-1/2	44	75	45
C910/2-4	360	150	180	-	240	18-1/2	42	110	-
C910/2-5	480	200	240	-	240	23	40	153	-
C910/2-6	1000	420	500	-	240	30	47	315	-
C910/2-7	15	6.0	7.5	7.5	240	5-1/2	22	7.5	6.9
C910/2-8	145	60	70	70	240	12	44	50	35

Notes:

(1) Dimensional tolerances: Dia $\pm$ 1/2 inch, Hgt $\pm$ 1 inch.
(2) Maximum capacity for each cylinder depends upon the gas service, the cylinder water capacity, and the filling density for the specific gas as specified in the CFR Title 49.
(3) The classification numbers include the letter, number, and slash number of this specification sheet, and a dash number, from table I (Ex. C910/2-3).
(4) Cylinders shall be stenciled with the name of the gas specified in accordance with MIL-STD-101, or left blank if none specified.

REQUIREMENTS:

1. Valve protection collars. Valve protection collars with or without lids shall be optional in lieu of neck flange and valve protection cap for all applications except for Dash No. 7 fuel gas cylinders where a valve protection collar with carrying hand hold is required.
2. Footrings. Footrings shall be attached by welding and shall have a minimum of two vent holes equally spaced. When the bottom edge is rolled, two drain holes equally spaced shall be provided.

2.1 Unit shell constructed. When a concave bottom head is supplied the resulting skirt shall be acceptable in lieu of a fabricated footring.

3. Liquid level gage. When a liquid level gage is required, the cylinder contractor shall provide an approved valve with a bleed valve in its body fed by a bleed tube of specific length to reach the liquid/gas interface at the maximum filling density for the cylinder design when it is in the upright position.

Intended use. The compressed gas cylinders are intended for low pressure use in the storage transportation and distribution of liquified petroleum gases and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

mixtures of [illegible] gas including, propane butane and mixtures and commercial brand name mixtures such as mapp gas, methylacetylene (propadeine) and apache gas.

MILITARY INTEREST:

Custodians:
Army - ME
Navy - SH
Air Force - 68

Review activities:
Army - CE
DLA - GS
Air Force - 11

User activities:
Navy - YD, CG, MS

CIVIL AGENCY COORDINATING ACTIVITIES:

HEW - FDA
GSA - FSS
VA - DMS
NASA - NS

Preparing activity:
Army - ME

Project 8120-0373

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents reference herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE RR-C-910/2 Cylinder, Compressed Gas. DOT Specifications 4BA, 4BW, and 4E Liquified Petroleum Gas & Fuel Gas Mixtures

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO (If "Yes", in what way?)

4 REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Command
DRDME-DE/DS
Fort Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.