RR-D-780C
27 November 1987
SUPERSEDING
Fed. Spec. RR-D-780B
29 December 1980

FEDERAL SPECIFICATION

DUSTERS, MANUALLY-OPERATED: TUBULAR-PUMP

MANUALLY-CARRIED AND ROTARY FAN, STRAP-CARRIED

This specification was approved by the Department of Defense (DoD) for use by all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers hand-operated insecticide dusters of the tubular pump and rotary fan types.

1.2 Classification. The dusters shall be of the following types and classes as specified (see 6.2):

Type I - Duster, manually-operated, tubular pump.
Class A - Integral metal powder container (see Fig. 1).
Class B - Interchangeable pesticide container (unbreakable) with pump foot-strap (see Fig. 2).
Type II - Duster, manually-carried and manually-operated, rotary fan, with a metal or polyethylene pesticide container (see Fig. 3).

2. APPLICABLE DOCUMENTS

2.1. Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Biomedical Research and Development Laboratory, ATTN: SGRD-UBE-D, Fort Detrick, Frederick, MD 21701-5010, by using the self-addressed Standard Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3740

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

2.1.1 (cont'd)

documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-636 - Boxes, Shipping, Fiberboard.

MILITARY

MIL-W-530 - Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-W-6858 - Welding, Resistance, Spot, and Seam.
MIL-P-15024/6 - Plate, Identification.

STANDARDS

FEDERAL

FED-STD-H28 - Screw-Thread Standards for Federal Services.
FED-STD-123 - Marking for Shipment (Civil Agencies).

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/American Society for Testing Material (ASTM) A 527 - Steel Sheet, Zinc-Coated (Galvanized) by the Hot-Dip Process, Lock-Forming Quality.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

2.2 (cont'd)

AMERICAN WELDING SOCIETY (AWS)

AWS C.1.1, Recommended Practices for Resistance Welding.

(Application for copies should be addressed to the American Welding Society, Inc., 550 N.W. LeJeune Road, P.O. Box 351040, Miami, FL 33135.)

OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

Title 29, Code of Federal Regulations, Chapter XVII, Part 1910, and Amendments.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION (NMFTA), INC., AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE (UCC), AGENT

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this standard shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:11Z
Check the source to verify that this is the currentversion before use.

3.1 Description. The dusters shall be in accordance with the requirements of this specification. The figures shown herein are for the convenience of identification and shall not preclude the purchase of dusters which are otherwise in accordance with the requirements of this specification. The dusters shall be capable of expelling all of the powder or granules, except residual surface dust, from the pesticide container. The dusters shall be designed to withstand damage and impairment of function.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Material. The material used in the construction of the dusters shall be as specified herein. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification. Material shall be free from all defects and imperfections that might affect the serviceability of the finished product. Material thickness specified herein is applicable before any coating is applied.

3.3.1 Corrosion-resistant metal. A corrosion-resistant metal for this application is defined as any metal which is inherently corrosion-resistant to powdered or granulated pesticides. Zinc-coated steel conforming to ANSI/ASTM A 527 or tin-plated steel shall be considered corrosion-resistant metal.

3.4 Surface finish. Unless otherwise specified (see 6.2), the finish and color shall be the contractor's option.

3.5 Type I, class A duster. Type I, class A duster shall consist of a metal air pump cylinder provided with a plunger assembly, operating rod, handle, exhaust valve, exhaust chamber, a metal powder container, discharge tubes, and nozzles (figure 1).

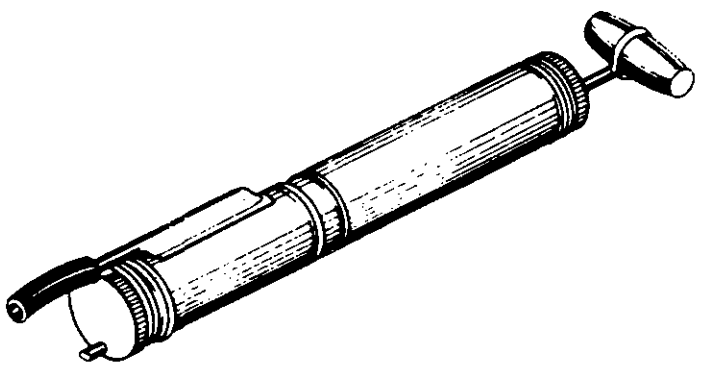


FIGURE 1. Type I, class A duster, manually-operated tubular pump with integral powder container (metal).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.5.1 Pump and exhaust chamber. The pump cylinder, exhaust chamber, and powder container of the duster shall be not less than 2 inches (5.08 centimeters (cm) nor more than 3 inches (7.62 cm) outside diameter (OD), and not less than 6 inches (15.24 cm) nor more than 12 inches (30.48 cm) in length. The duster body shall be corrosion-resistant metal having a minimum nominal thickness of 0.0164 inch (0.041 cm; 27 gage). Body seams, if any, shall be as strong structurally as the body material. The inside of the pump cylinder shall be smooth. The exhaust chamber valve shall prevent pesticide powder from entering into the pump cylinder. The pump shall have a metal operating rod not less than 3/16 inch (0.48 cm) in diameter provided with a comfortable handgrip at one end. The pump plunger cup shall be oil-treated leather, or other equally pliant and suitable material, requiring no in-service lubrication. The pump shall produce a sharp blast through the exhaust valve and tube, thoroughly agitating the pesticide powder in the powder chamber and causing a dust-laden air stream to flow through and out of the discharge tube and nozzle.

3.5.2 Pesticide container. The pesticide container shall be integral with the pump cylinder and exhaust chamber and shall be corrosion-resistant metal having a minimum nominal thickness of 0.0164 inch (0.041 cm; 27 gage). The powder container shall have a minimum powder capacity of one quart [0.95 liter (l)] liquid measure. The powder container shall have a screw cap filler opening of not less than 1 3/4-inch (4.45 cm) inside diameter (ID). All sections of the powder container, except the discharge opening, shall be airtight.

3.5.3 Discharge tube and nozzle. All discharge tubes and nozzles shall be as normally furnished by the manufacturer for dusters of this type and class, providing they are suitable for dusting operations herein specified. All discharge tubes and nozzles shall be corrosion-resistant material and shall have friction-type joints or similar connections whereby they can be easily disassembled and reassembled. The tubes and nozzles shall not become disengaged while in operation.

3.6 Type I, class B duster. Type I class B duster shall consist of a metal air pump cylinder provided with a plunger assembly, operating rod, handle exhaust valve, exhaust chamber, unbreakable, interchangeable powder container, metal foot strap and discharge hose (figure 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

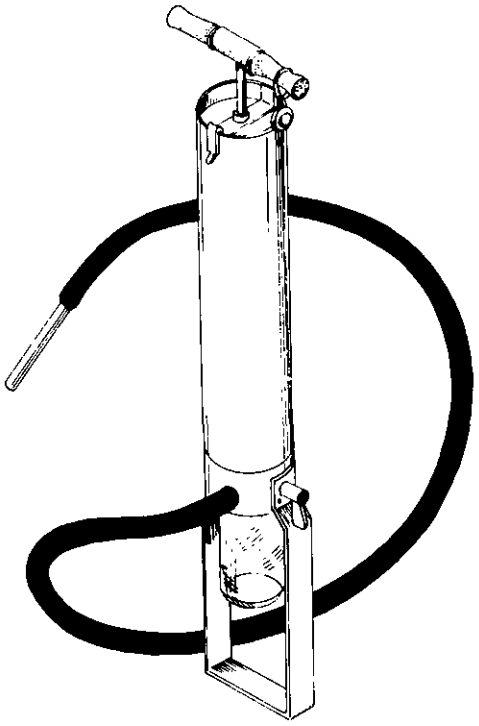


FIGURE 2. Type I, class B duster with interchangeable, unbreakable powder container and pump foot strap.

3.6.1 Pump and exhaust chamber. The pump body and exhaust chamber for class B dusters shall be 3 3/4 inches (9.53 cm) plus or minus 1/8-inch (0.32 cm) outside diameter and 14 inches (35.56 cm) plus or minus 2 inches (5.08 cm) in length. The cylinder body shall be corrosion-resistant metal having a minimum nominal thickness of 0.0164 inch (0.041 cm; 27 gage). Body seams, if any, shall be as strong structurally as the body material. The inside of the pump cylinder shall be smooth. The exhaust chamber valve assembly shall prevent pesticide dust from entering into the pump cylinder. The lower part of the pump cylinder shall have a 3/4-inch (1.91 cm) side nipple discharge. A 3/4-inch ID hose, 36 inches (91.44 cm) long shall be attached to the nipple. The other end of the hose shall have a 3/4-inch OD metal tube inserted into and firmly attached to the hose as shown in figure 2. The bottom of the pump cylinder shall have matching National Pipe Thread (NPT) internal threads conforming to FED-STD-H28, for the pesticide dust container external threads. The lower part of the pump cylinder shall have a lever controlled valve whereby either pesticide dust and air or air alone may be pumped through the discharge hose. The pump shall have a metal operating rod, 1/4-inch (0.635 cm) minimum diameter, provided with a handgrip comfortable to the hand. The pump plunger cup shall be pliant oil-treated leather requiring no in-service treatment. The pump shall produce strong sharp air blasts through the pump

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.6.1 (cont'd)

cylinder and into the pesticide dust container thoroughly agitating the contents of the container and causing a dust-laden stream to flow out of the discharge hose.

3.6.2 Insecticide container. The pesticide powder container shall be polyethylene or corrosion-resistant metal having a minimum nominal thickness of 0.0164 inch (0.041 cm; 27 gage). The container shall have a minimum capacity of 1.5 pints liquid measure (0.71 l). Body seams, if any, shall be as strong structurally as the body material. Threads shall be external NPT conforming to FED-STD-H28, and shall fit the mating pump cylinder threads.

3.7 Type II duster. Type II duster shall consist of a metal pesticide container (hopper), a rotary type blower fan operated by a fan operating mechanism, a pesticide agitator, adjustable flow settings, carrying straps, and discharge tubes and nozzles (figure 3).

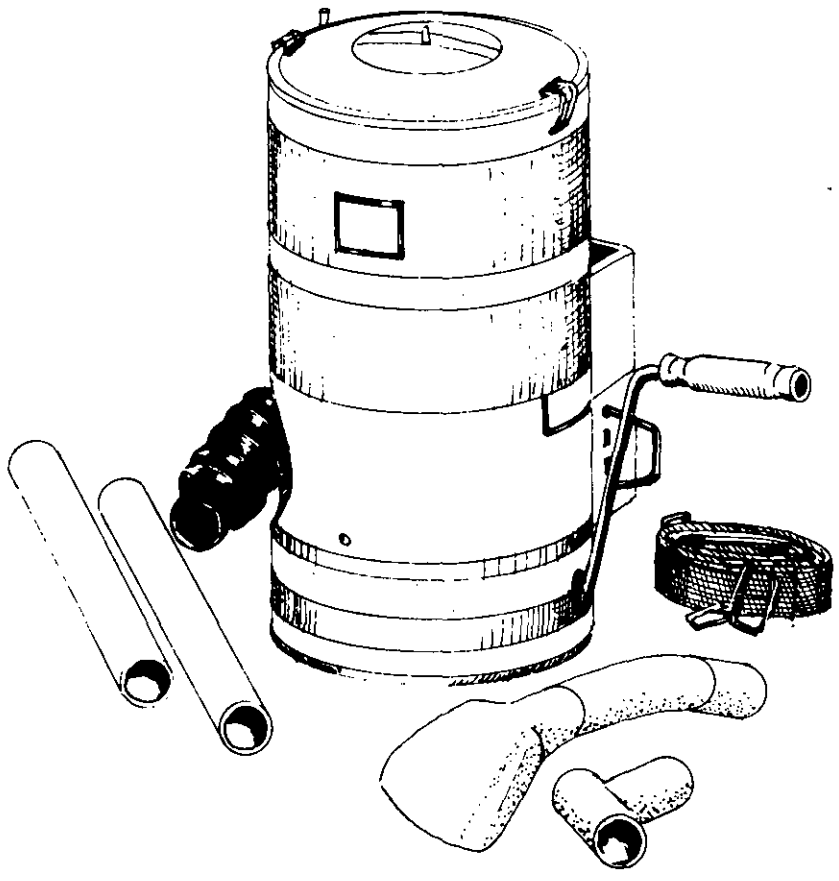


FIGURE 3. Type II duster, manually-carried and manually-operated rotary fan.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:11Z
Check the source to verify that this is the currentversion before use.

3.7.1 Design. The duster shall consist principally of a cylindrical pesticide hopper equipped with a rotary-type blower fan which shall be operated through a sealed gear box by a hand crank. The duster shall be fitted with carrying straps, discharge tubes, and nozzles. Body seams, if any, shall be as strong structually as the body material. The design shall be such that when the unit is strapped to a user's chest in an operating position, the center of gravity will be as close as possible to the user's chest; and the user will have one hand free to operate the crank while the discharge tube is guided with the other hand. In normal operating position, the crank shall be at the right side of the operator and the fan at the left. All moving parts shall not bind or cause excessive wear. In operation, the pesticide shall flow either directly from the hopper into the fan and shall mix thoroughly with the air before discharge or the pesticide shall mix thoroughly with the air before entering the fan. Constant mechanical agitation shall be provided to ensure a uniform flow of any type of commercial insect dust or granules. A means of adjusting the rate of flow shall be provided. The direction of discharge shall be adjustable during operation to any vertical angle without the use of special attachments, and adjustments shall be accomplished with no loss in discharge velocity. The unit shall be complete and ready for use.

3.7.2 Pesticide container. The container shall be either corrosion-resistant metal having a minimum nominal thickness of 0.0276 inch (0.07 cm); 24 gage) or polyethylene having a minimum nominal thickness of 0.076 inch (0.193 cm). The hopper shall have a filler opening of sufficient size for easy filling and shall be tight sealing. Over the shoulder carrying straps shall be firmly attached to the hopper.

3.7.2.1 Agitator. There shall be a positive acting agitator, made of corrosion resistant steel or brass rod, inside the hopper to prevent caking of the dust. The agitator shall be attached to the crankshaft extension and shall extend to within 1/2 inch (1.27 cm) of the hopper wall.

3.7.2.2 Adjustable flow. An adjustable flow control with three or four settings shall be provided which shall be easy to manipulate and shall provide a positive, nonclogging, and uniform flow of any type of commercial pesticide powder or granules, in varying quantities, as desired, from the hopper into the air stream. Powder and granules shall be dispensed in quantities varying with the flow adjustment settings as shown in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

TABLE I. Adjustable flow performance.

Flow Setting	Flow Rates - time (in minutes) required to dispense 5 pounds (2.268 kilograms) of pesticide	
	Granules (size 30-60)	Dust
1	31-25	37-32
2	23-12	29-16
3	14-7	16-8
*4	12-5	14-6

* The fourth setting is not mandatory.

3.7.3 Power transmission. The power transmission shall consist of a handcrank, a crankshaft, gears sealed in a gear box, and a fan shaft.

3.7.4 Fan operating mechanism. A crankshaft shall have sufficient leverage and drive to provide a free turning fan operating mechanism. Machine-cut metal gears shall be sealed in lubricant encased in an oil-tight metal housing which shall be so arranged as to permit easy access to the gears and shall have a dust-tight plug for adding lubricant. Gear ratio shall be such that one turn of the crank equals not less than 30 revolutions of the fan. The type of bearings shall be self-lubricating (lubricant-impregnated) or antifrictional. Gears shall not jam during use.

3.7.5 Fan and fan housing. The fan shall be a centrifugal blower type, not less than 5 3/8 inches (13.653 cm) in diameter by 1 7/16 inches (3.652 cm) wide. The fan shall be corrosion-resistant metal, with a minimum nominal thickness of 0.0276 inch (0.07 cm; 24 gage). The fan housing shall be corrosion-resistant metal with a minimum nominal thickness of 0.0276 inch or shall be one-half cast metal and one-half rigid Polyvinyl Chloride (PVC) with both materials having a minimum nominal thickness of 0.076 inch (0.193 cm). An outboard bearing shall be provided in the fan case for the fan shaft. When the air intake is located on the fan housing, the intake shall have an enclosed or edge-bound hardware cloth guard for protection of the operator's fingers. The design of the fan housing shall permit easy rotation of the discharge tube through 360 degrees and retention at any position while in use. There shall be no loss of air velocity or dust output resulting from abrupt changes of direction of the discharge tube.

3.7.6 Carrying straps. The duster shall be fitted with two adjustable-length, over-the-shoulder carrying straps, which shall have metal tips and durable clips. The straps shall be 1 to 1 1/2 inches (2.54 to 3.81 cm) wide and have a minimum breaking strength of 100 pounds [45.36 kilograms (kg)].

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.7.6 (cont'd)

When specified (see 6.2), the carrying straps shall be fabricated from cotton webbing conforming to MIL-W-530, type IIa, class 4, color olive drab No. 7.

3.7.7 Discharge tubes and nozzles. All discharge tubes and nozzles shall be sturdy, corrosion-resistant metal or rigid PVC with flexible rubber attachments. The tubes shall be adjustable for discharging pesticides at any angle from either a single or double tube. Weld points at the collar of coupling between fan case and discharge tubes shall conform to AWS C1.1.

3.7.8 Weight and size. The net weight shall not exceed 12 pounds (5.44 kg) and the pesticide container shall have a capacity of 288.5 to 600 cubic inches (4728.52 to 9834 cubic cm).

3.8 Item marking.

3.8.1 Civil identification marking. Each duster shall be marked in a permanent and legible manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.8.2 Military identification marking. The dusters procured by the military shall be identified in accordance with MIL-STD-130 and the marking shall be applied to plates conforming to MIL-P-15024/6 (see 6.2).

3.8.3 Caution marking. The dusters shall be marked with the following caution marking:

> "USE ONLY UNDER THE DIRECT SUPERVISION OF A TRAINED OR CERTIFIED PEST CONTROL OPERATOR. USE PERSONAL PROTECTION REQUIRED BY OSHA, 29 CFR 1910.132, 1910.133, AND 1910.134, AS APPLICABLE. OCCUPIED AREAS MUST BE EVACUATED, AND CLEARLY POSTED, PRIOR TO OPERATION."

Marking shall be solvent and wear resistant so that it remains legible during the expected use or life of the unit.

3.9. Workmanship. All dusters shall be free from defects that could impair their performance or serviceability. All parts, components, and assemblies shall be clean and free from dirt, sand, fins, pits, sprues, scale, flux, or any other extraneous material. All edges shall be rounded or beveled.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

4.1 (cont'd)

requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Examination of preparation for delivery (see 4.6).

4.3 First article inspection. First article inspection shall be performed on one or more units (see 6.3). This inspection shall include the examination and tests described in section 4.5. Failure of the first article to pass the examination and test shall be cause for rejection. The first article may be a standard production unit from the contractor's current inventory provided the unit meets the requirements of the specification and is representative of the manufacturing technique applicable to the remaining units to be furnished under the contract.

4.4 Quality conformance inspection.

4.4.1 Sampling.

4.4.1.1 Examination. Sampling for examination shall be in accordance with MIL-STD-105, inspection level I.

4.4.1.2 Tests. Sampling for tests shall be in accordance with MIL-STD-105, inspection level S-4.

4.4.2 Examination. Samples selected in accordance with 4.4.1.1 shall be examined as specified in 4.5.1. Acceptable Quality Level (AQL) shall be 2.5 percent defective.

4.4.3 Tests. Samples selected in accordance with 4.4.1.2 shall be tested as specified in 4.5.2.1 and 4.5.2.2., as applicable. AQL shall be 2.5 percent defective.

4.5 Inspection procedure.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:11Z
Check the source to verify that this is the currentversion before use.

4.5.1 Examination. The duster shall be examined as specified herein for the following defects.

101. Material not as specified.
102. Components missing.
103. Dimensions not as specified.
104. Weight not as specified.
105. Capacity not as specified.
106. Identification marking not as specified.
107. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Type I. Type I plunger-operated sample dusters shall be filled to capacity with pesticide powder and subjected to the following tests, in given sequence.

4.5.2.1.1 Ruggedness. Drop the duster three times from a height of 3 feet (91.44 cm) onto a hard wood surface. The manner of dropping shall be such as to cause the duster to strike on entirely different positions in the three drops. Examine the duster to determine damage, such as cracks, which would affect operation of controls, cause leaks, loosen handle and container connections, break or misalign tubing, pump, fan mechanism, or powder container, and any other damage or distortion which could affect function. Any evidence of aforementioned damage shall constitute failure of this test.

4.5.2.1.2 Performance. Pump the handle in short even strokes. Failure of the duster to produce an even stream of dust shall constitute failure of this test.

4.5.2.1.3 Leakage. Seal the duster outlet. Pump the handle to create pressure in the duster. Pump plunger gasket air leakage (negligible air resistance to the pump handle) or air leakage at the seams shall constitute failure of this test.

4.5.2.2 Type II. Fill the rotary blower duster to capacity with pesticide powder, subject the duster to the ruggedness test of 4.5.2.1.1, and operate as specified in 4.5.2.2.1 and 4.5.2.2.2 at all flow adjustments. Repeat using size 30 to 60 granules.

4.5.2.2.1 Operation. Fill the rotary blower duster to capacity with pesticide powder and plug the outlet hole. Turn the crank 100 times at a steady rate under this full load. At the end of the test, empty the pesticide container and examine the entire unit for component failure or fatigue. Component failure or fatigue, any leakage of powder, or failure of the duster to conform to the flow rates given in table 1 shall constitute failure of this test.

4.5.2.2.2 Assembly and disassembly. All discharge tubes and nozzles shall be assembled to the blower, adjusted over full range of operations, and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

4.5.2.2.2 (cont'd)

disassembled 25 times. At end of each test, tubes, nozzles, and their associated securing mechanisms shall be examined for component failure or fatigue. Component failure or fatigue, to include welds, solder joints, and screws; any leakage of dust; or failure of the duster to conform to table I, shall constitute failure of this test.

4.6 Examination for preparation of delivery. An examination shall be made to determine compliance with the requirements of section 5. The sample unit shall be one shipping container fully prepared for delivery. Sampling shall be in accordance with MIL-STD-105. The inspection level shall be S-2 with an AQL expressed in terms of percent defective.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, level B, or commercial, as specified (see 6.2).

5.1.1 Level A. Each complete duster shall be packaged in a close-fitting box conforming to PPP-B-636, W5c or W6c as applicable to the weight of the contents, style optional. Cushioning shall be provided within the box to prevent movement or damage to the contents. Box closure and sealing shall be in accordance with Method V of the appendix to the box specifications.

5.1.2 Level B. Each complete duster shall be packaged in a close-fitting box conforming to PPP-B-636, Type CF, Class-Domestic, Variety SW, Grade as applicable to the weight of the contents, style optional. Cushioning shall be provided within the box to prevent movement or damage to the contents. Box closure shall be in accordance with the appendix to the box specifications.

5.1.3 Commercial. Each complete duster shall be individually packaged in a fiberboard box in accordance with normal commercial practice. The package shall be designed to protect the dusters against damage during shipment, handling, and storage.

5.2 Packing. Packing shall be level A, level B, or commercial, as specified (see 6.2).

5.2.1 Level A. Dusters of like description, packaged as specified in 5.1, shall be packed together in close-fitting boxes conforming to PPP-B-601, Overseas Type, style optional, in quantities not to exceed the weight limitation of the box. Box closure and strapping shall be in accordance with the appendix to the box specifications.

5.2.2 Level B. Dusters of like description, packaged as specified in 5.1, shall be packed together in close-fitting boxes conforming to PPP-B-636, V3c, style optional. The gross weight or size shall not exceed the limitations of the box specification. Box closure and strapping shall be in accordance with the appendix to the box specification.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:11Z
Check the source to verify that this is the currentversion before use.

5.2.3 Commercial. Dusters of like description, packaged as specified in 5.1, shall be packed together in fiberboard containers complying with Uniform Freight Classification rules and National Motor Freight Classification rules in a manner to assure carrier acceptance and safe delivery to their destination at the lowest rates.

5.3 Marking.

5.3.1 Civil agencies. Marking shall be in accordance with Federal Standard No. 123.

5.3.2 Military agencies. Packaging and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Type I, class A and type II dusters are intended for pest and disease control operations in and around military and civilian facilities (offices, dining facilities, warehouses, farms, and rodent burrows). Type I, class B duster is for dispersal of powder in rodent burrows.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Type and class required (see 1.2).

c. When sample units will be required for first article inspection and number of units required (see 3.2, 4.3, and 6.3).

d. Finish, if other than as specified (see 3.4).

e. When the straps shall conform to MIL-W-530 (see 3.7.6).

f. Degrees of packaging and packing required (see 5.1 and 5.2).

g. When military identification marking is required (see 3.8.2).

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL) the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When provisions of DoD Federal Acquisition Regulation Supplement, Part 27, Sub-Part 27.410-6 are invoked and the DD Form 1423 is not used, the data specified below shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

6.2.2 (cont'd)

delivered by the contractor in accordance with the contract or the purchase order requirements. Deliverable data required by this specification is cited in the following paragraph:

Paragraph number	Data Requirement Title	Applicable DID Number	Options
6.4	Commercial Manuals	DI-M-4022C	-----

(Copies of data items descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Navy Publications and Forms Center, or as directed by the contracting officer.)

6.3 Inspection for First Article. When a first article inspection is required, the duster should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Data. The contractor should include an illustrated parts lists, a maintenance and operation manual, and any other technical material or data with each duster.

6.5 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).

6.6 Subject term (key word) listing. The following subject terms (key words) are:

Duster, manually-operated
Insecticide duster
Manual duster
Pesticide duster, manually operated
Pump duster
Rotary fan duster

6.7 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

Custodians:
Army - MD
Navy - YD
Air Force - 99

Preparing activity:
Army - MD

Review activities:
Army - MD
Navy - MC, MS
DLA - CS
Air Force - 84

(Project 3740-0122)

Civil Agencies Coordinating Activities:
MRD
DCG
BOP
GSA-FSS
HHS
VA-OSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

U.S. Army Biomedical Research and
Development Laboratory
ATTN: SGRD-UBE-D
Building 568, Fort Detrick
Frederick, MD 21701-5010

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:11Z
Check the source to verify that this is the current version before use.