RR-F-1256A
June 15, 1973
SUPERSEDING
Fed. Spec. RR-F-001256(GSA-FSS)
January 30, 1967

FEDERAL SPECIFICATION

FRAME, CLOTH BASKET (FOLDING)

This specification was approved by the Commissioner Federal Supply Service, General Services Administration, for the use of all Federal agencies

1 SCOPE AND CLASSIFICATION

1 1 Scope This specification covers a metal folding frame, equipped with casters, used for supporting laundry bags

1 2 Classification

1 2 1 Size Frames shall be furnished in the following sizes, as specified (see 6.2)

Size 1 - 18-1/2 inches long
Size 2 - 23 inches long

2 APPLICABLE DOCUMENTS

2 . The following specifications and standards, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein

Federal Specifications

FF-C-82 - Casters, Swivel Chair
QQ-C-320 - Chromium Plating (Electrodeposited)
QQ-N-290 - Nickel Plating (Electrodeposited)
PPP-B-585 - Boxes, Wood, Wirebound
PPP-B-591 - Boxes, Fiberboard, Wood-Cleated
PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner
PPP-B-636 - Box, Fiberboard
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple-Wall
PPP-F-320 - Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Shapes

Federal Standard

Fed Std No 123 - Marking for Domestic Shipment (Civil Agencies)

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U S Government Printing Office, Washington DC 20402

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Dallas, Denver, San Francisco, Los Angeles, and Seattle, WA

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specificaitons and Standards from established distribution points in their agencies.)

PSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

Military Standards.

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the National Motor Freight Traffic Association, Inc., Agent, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups using Federal agencies.)

3. REQUIREMENTS

3.1 Material. The frame and components shall be of all steel construction.

3.2 Design and construction.

3.2.1 Frame. The frame shall be fabricated from 1" O.D. by 0.049 inch thick (No. 18 Birmingham Wire Gage) steel tubing to the design and dimensions shown in figures 1 and 2. The inner tubular member shall fit within the outer tubular member with sufficient clearance to allow folding. The tubular members shall be joined together by either a 3/16 inch minimum oval head steel bolt and nut or a 3/16 inch minimum steel rivet. An 11/16 inch minimum steel washer shall be used between members as a spacer. Bolts, nuts and/or rivets shall be installed with an adequate means for preventing loss of proper tightness. The tubing shall be depressed on the inside and outside at point of joining so that the bolt, nut and/or rivet shall be recessed to prevent injury to person or fabric.

3.2.2 Folding shelf. The frame shall be equipped with a folding shelf, fabricated of not less than 0.0625 inch (16 gage) cold rolled carbon steel. The shelf shall consist of an inner and outer plate conforming to the design and dimensions shown in figrues 1, 2 and 3. The inner and outer plates shall be joined in the center of the shelf by not less than a 3/8 ± 1/32 inch steel rod or bolt on which the folding action shall hinge. The shelf shall be attached to the frame by not less than 3/8 ± 1/32 inch steel rods or bolts which shall tie into the tubular members not more than 2-1/2 inches from the bottom of the frame (see figrues 1 and 2). The folding action of the shelf shall hinge on these rods or bolts. The outer plate of the shelf shall overlap the inner plate, forming a rigid level platform when the frame is in the open position (see figures 1 and 2). When the frame is folded the center portion of the shelf shall fold upward, allowing the unit to fold to 6 ± 1 inch (see figrue 2). All fasteners used in the shelf assembly shall be installed with an adequate means for preventing loss of proper tightness.

3.2.3 Spacers. Spacers shall be made of steel tubing and shall have an inside diameter slightly more than the diameter of the steel rods or bolts used to mount the shelf to the tubular frame. The spacers shall be of adequate length to hold the shelf centered on the steel rods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.2.4 Dimensions. Length, width and height dimensions of the frame are minimum dimensions and shall have a tolerance of ± 1 inch. Length, width and depth dimensions of the shelf plates shall have a tolerance of ± 1/16 inch.

3.3 Casters. The frame shall be equipped with four electrostatic conductive rubber-wheeled casters having ball bearing swivels and plain bearing wheels mounted into the ends of the tubular members The casters shall be of the expansion socket adapter type as illustrated for type I style "a" in figure 1 of FF-C-82, and shall have a stem of not less than 7/16 inch in diameter and not more than 1-29/32 inches in length The caster wheels shall be of solid conductive rubber and shall be not less than 3 inches in diameter with a tread width of not less than 3/4 inch The exposed metal parts of the casters and sockets shall be plated in accordance with commercial practice and shall be either chrome, nickel, or zinc plated as specified (see 6 2)

3 4 Finish The frame, shelf, and spacers shall be plated in accordance with class I, type I of QQ-C-320 or class I, type III (ks) of QQ-N-290.

3 5 Identification marking Frames shall be permanently marked with the manufacturer's name or registered trademark

3 6 Performance Frame shall be capable of supporting 75 pounds in the open position without deformation and shall roll easily in any direction when tested in accordance with 4 4 2

3 6.1 Folding mechanism When the frame is in the folded position it shall be capable of standing upright on its own casters and shall not show malfunction when opening or folding (see 4 4 3)

3 7 Workmanship Frames shall not present any sharp edges which might cut or snag Rivets, when used, shall be tightly set. Bolts and nuts when used, shall be of the standard American National Form and shall be installed with an adequate means for preventing loss of proper tightness.

4 QUALITY ASSURANCE PROVISIONS

4 1 Responsibility for inspection Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements

4.2 Sampling

4 2 1 Lot Unless otherwise specified (see 6 2), a lot shall consist of all frames submitted for inspection at the same time

4 2 2 Visual examination of end item Sampling for this examination shall be in accordance with level S-3 in MIL-STD-105 The Acceptable Quality Levels (AQL's) for defects listed in table I shall be 2 5 percent defective for major defects and 6 5 percent defective for total defects

4 2 3 Sampling for tests Sampling for tests shall be in accordance with level S-2 in MIL-STD-105 The AQL for tests shall be 6 5 on the basis of percent defective

4 3 Examination

4.3.1 End item. Frames selected in accordance with 4.2.2 shall be examined for defects listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects, end item

Defects	Major	Minor
Size not as specified.	X	
Dimensions not as specified	X	
Sharp or burred edges which might cause injury.	X	
Flaking, peeling, blistering of plating.	X	
One fastener missing.		X
More than one fastener missing.	X	
Component bent, dented, malformed or otherwise damaged or mispositioned		X
Casters not properly mounted	X	
Casters inoperative.	X	
Damage or defects affecting function or serviceability	X	
Damage or defects not affecting function or serviceability		X

4.3.2 Inspection of preparation for delivery An inspection shall be made to determine that the packaging, packing and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table II For examination of interior packaging the sample unit shall be one shipping container fully prepared for delivery selected at random just prior to the closing operations Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers in the end item inspection lot The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 defects per hundred units

TABLE II Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted incorrect, illegible, improper size, location, sequence, or method of application
Materials	Any component missing or damaged
Workmanship	Inadequate application of components such as incomplete closure of container flaps loose strapping, distortion of container
Contents exterior	Number per container is more or less than required New weight exceeds requirements

4.4 Tests

4.4.1 General Frames selected in accordance with 4.2.2 shall be tested to verify compliance with this specification

4.4.2 Stability Open the frame and place it on a smooth floor Distribute 75 pounds of weight evenly on the shelf then push the frame forward, backward to the left and to the right, a minimum of 3 times (see 3.6)

4.4.3 Operation The frame shall be opened and closed a minimum of 5 times, after which an examination shall be made to determine compliance with the folding and storage requirements of 3.6.1

5 PREPARATION FOR DELIVERY

5.1 Packaging Packaging shall be level A or C as specified (see 6.2

5.1.1 Level A. Each frame shall be packaged in a close-fitting box conforming to PPP-B-636, class weather resistant. Fiberboard blocking and bracing shall be provided with the fiberboard meeting the requirements of PPP-B-320, type CF, class domestic, variety SW, grade 200. The box shall be closed in accordance with method II of the appendix to the box specification.

5.1.2 Level C. The frames shall be individually packaged in accordance with the manufacturers standard practice, providing that this will insure protection for the frames during shipment and provide for a safe delivery to destination

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Unit packages of frames of like description in quanitities as specified (see 6.2), shall be packed in a close-fitting box conforming to PPP-B-585, class 3, PPP-B-591, class II, PPP-B-601, overseas type, PPP-B-621, class 2, or PPP-B-640, class 2, grade A The boxes shall be closed and strapped in accordance with the applicable specification or appendix thereto The gross weight shall not exceed 200 pounds.

5.2.2 Level B Each frame shall be packed in a close-fitting box conforming to PPP-B-636, class domestic Fiberboard blocking and bracking shall be provided with the fiberboard meeting the requirements of PPP-F-320, type CF class domestic, variety SW, grade 200 The box shall be closed in accordance with method II of the appendix to the box specification

5.2.3 Level C The frames packaged as specified in 5.1.2 shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with Uniform Freight Classification rules and the National Motor Freight Classification rules

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.2)

5.3.1 Civil agencies In addition to markings required by the contract or order, all interior packages and shipping containers shall be marked in accordance with Fed Std. No 123.

5.3.2 Military agencies In addition to markings required by the contract or order, all interior packages and shipping containers shall be marked in accordance with MIL-STD-129

6 NOTES

6.1 Intended use The folding frame covered by this specification is used to support a cloth bag for holding and conveying soiled linen

6.2 Ordering data Purchasers should select the preferred options permitted herein and include the following information in procurement documents

(a) Title number and date of this specification
(b) Size required
(c) Size of lot, if different from 4.2.1
(d) Selection of applicable level of packaging and packing required (see 5.1 and 5.2)
(e) Quantity of unit packages required in shipping container (see 5.2.1)

Military Interests

Army - GL
Navy - YD
Air Force - 69


User activity

Air Force - 84

Preparing activity

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

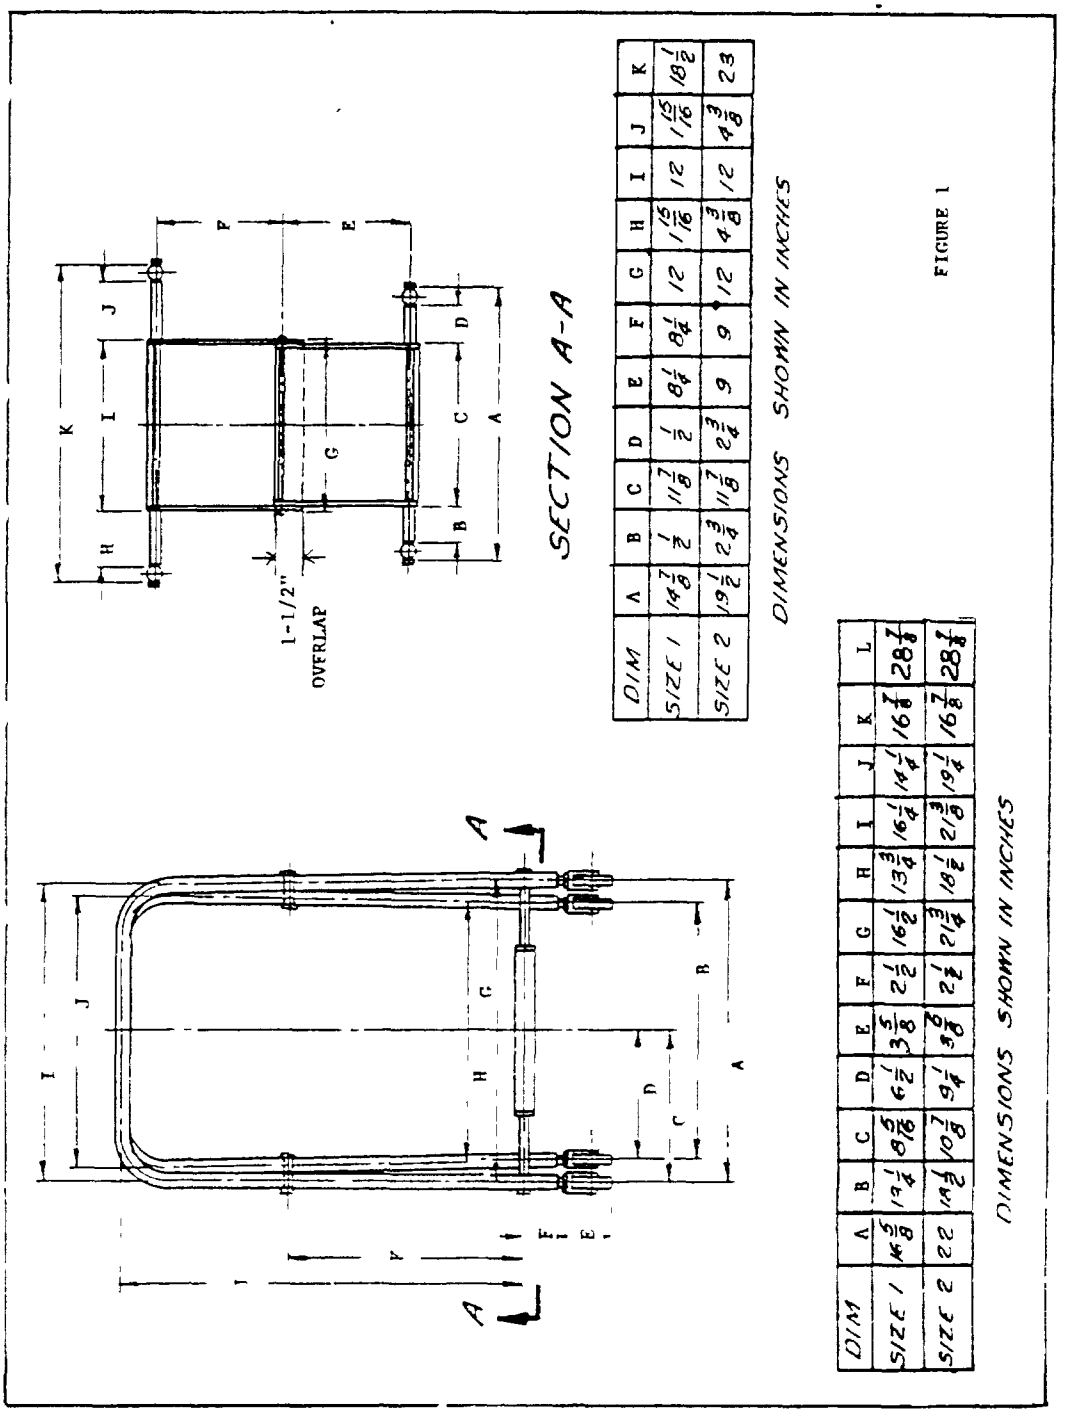

DIM	A	B	C	D	E	F	G	H	I	J	K
SIZE 1	14 7/8	1/2	11 7/8	1/2	8 1/4	8 1/4	12	1 5/16	12	1 5/16	18 1/2
SIZE 2	19 1/2	2 3/4	11 7/8	2 3/4	9	9	12	4 3/8	12	4 3/8	23

DIMENSIONS SHOWN IN INCHES

DIM	A	B	C	D	E	F	G	H	I	J	K	L
SIZE 1	4 5/8	14 1/4	8 5/8	6 7/8	3 5/8	2 1/2	19 1/2	13 3/4	16 1/4	1 1/4	19 7/8	28 1/2
SIZE 2	22	14 1/4	10 1/2	6 7/8	3 5/8	2 1/2	22 3/4	19 1/2	16 1/4	1 1/4	19 7/8	28 1/2

DIMENSIONS SHOWN IN INCHES

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

DIM	A	B	C	D	E	F	G	H	I	J
SIZE 1	16 1/4	17 5/8	35 3/4	39	31 5/8	6 1/2	8 5/16	16 5/8	28 3/4	10 3/8
SIZE 2	21 3/4	18	35	39	31 3/8	6 1/2	9	18	27 3/4	15 3/8


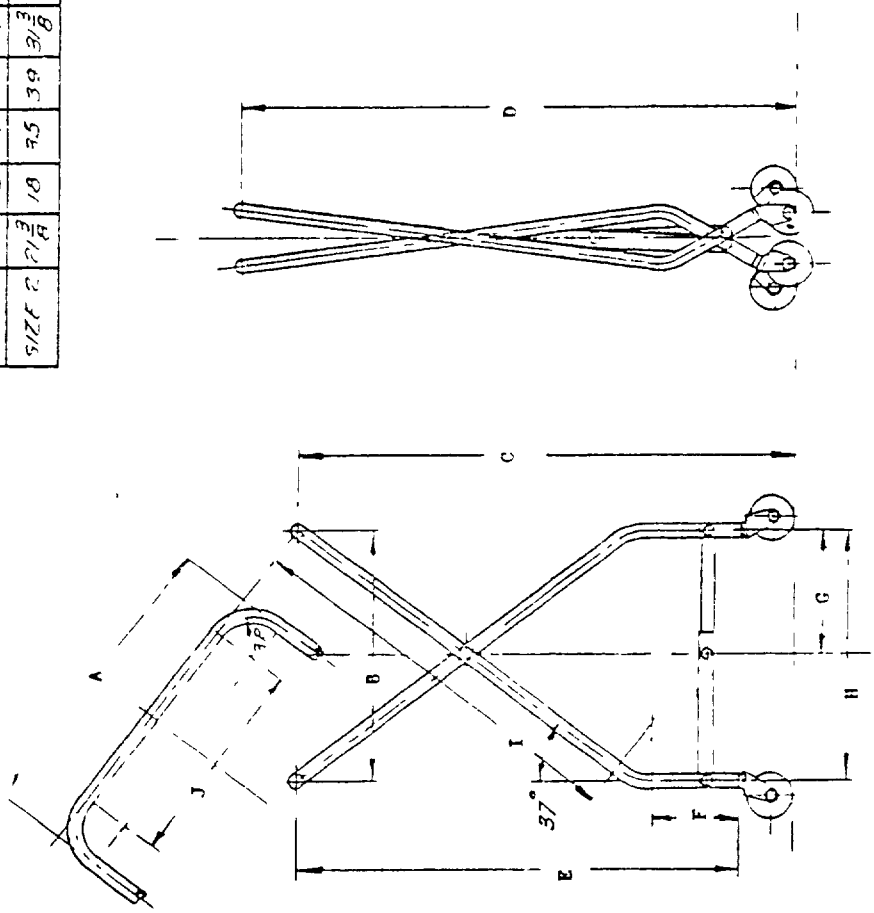


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

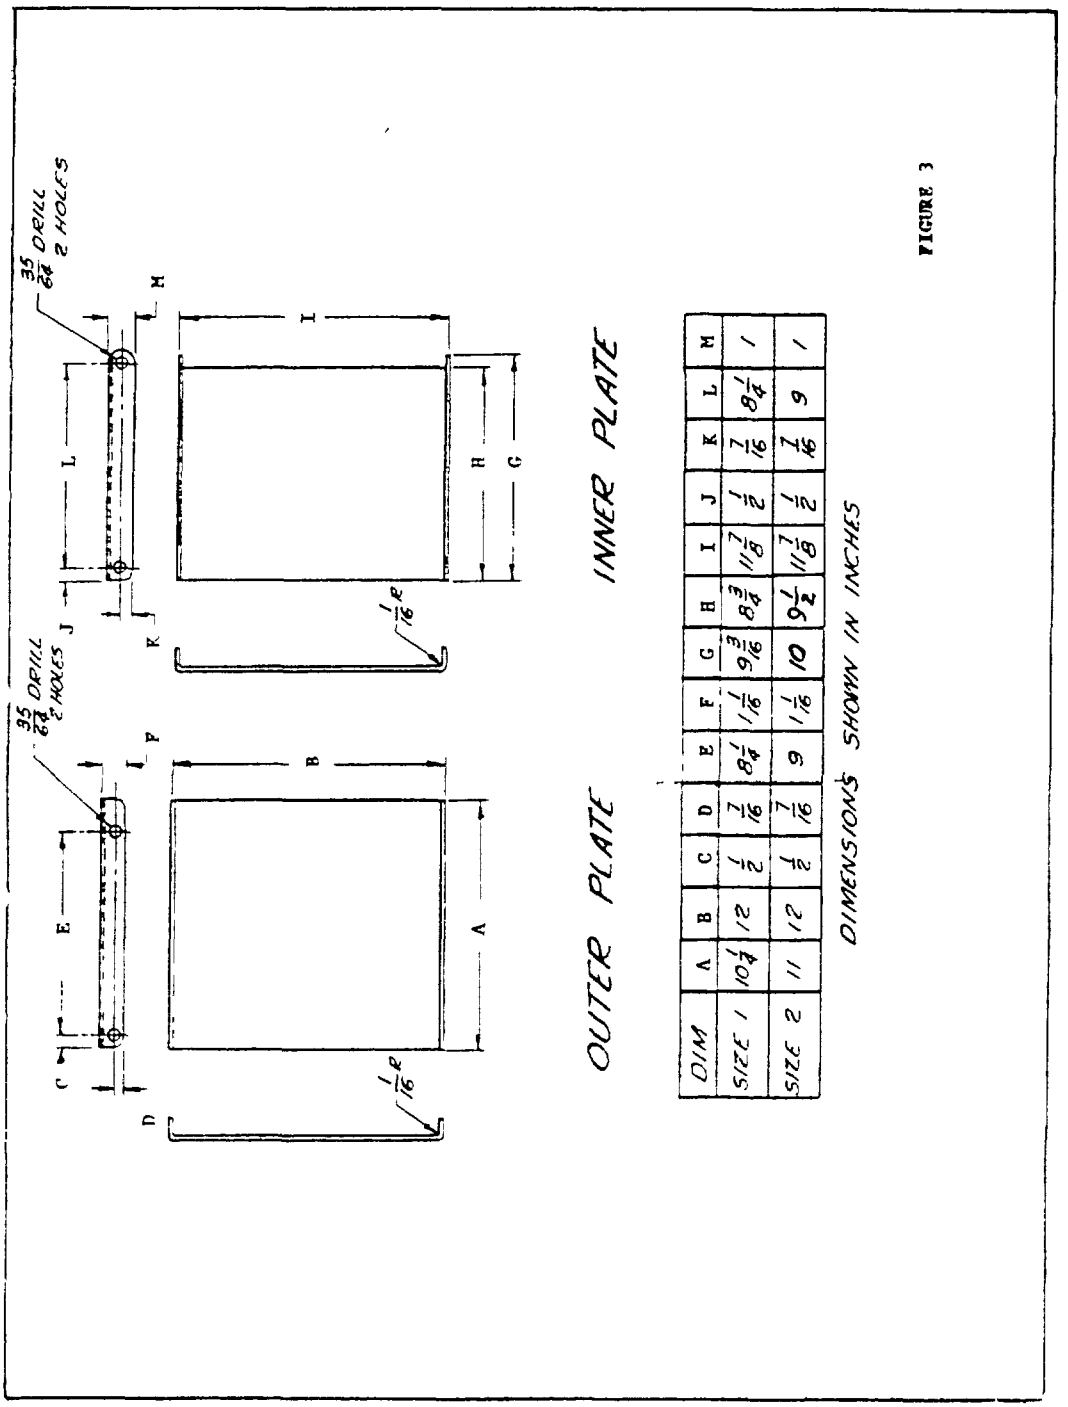

DIM	A	B	C	D	E	F	G	H	I	J	K	L	M
SIZE 1	10 1/4	12	1/2	7/16	8 1/4	1/16	9 3/16	8 3/4	11 7/8	1/2	7/16	8 1/4	1
SIZE 2	11	12	1/2	7/16	9	1/16	10	9 1/2	11 7/8	1/2	7/16	9	1

DIMENSIONS SHOWN IN INCHES

FIGURE 3

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.