RR-F-450D
May 31, 1974
SUPERSEDING
Fed. Spec. RR-F-450C
February 5, 1969 and
Int. Fed. Spec. RR-F-00455(GSA-FSS)
October 6, 1964

FEDERAL SPECIFICATION

FLATWARE, STAINLESS STEEL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers stainless steel graded and ungraded flatware (knives, forks, and spoons).

1.2 Classification.

1.2.1 Items and styles. Flatware covered by this specification shall be of the following types, items, and styles, as specified (see 6.2):

Type 1 - Graded.

Item I - Knife.

Style 1 - Utility, table.
2 - Serrated, table.
3 - Butter spreader.

Item II - Fork.

Style 1 - Utility, table.
2 - Cocktail.
3 - Dessert.
4 - Salad.

Item III - Spoon.

Style 1 - Tea.
2 - Dessert.
3 - Table, large.
4 - Iced tea.
5 - Boullion.

FSC 7340

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

Type 2 - Ungraded.

Item I - Knife, table.
Item II - Fork.
Item III - Spoon.

Style I - Tea.
Style II - Table, medium (dessert).
Style III - Table, large.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specification:

PPP-B-636 - Boxes, Shipping, Fiberboard.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers, at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO., Ft. Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing and Materials (ASTM) Standards:

A 167 - Stainless and Heat Resisting Chromium-Nickel Steel Plate, Sheet and Strip.
A 176 - Stainless and Heat Resisting Chromium Steel Plate, Sheet and Strip.
A 276 - Stainless and Heat-Resisting Steel Bars, and Shapes.
E 18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA. 19103.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, NW, Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish a sample knife, fork, or spoon as applicable for first article inspection and approval (see 4.3 and 6.4).

3.2 Standard product. Flatware delivered under this specification shall be the manufacturers' standard commercial product, except for any changes necessary to comply with this specification.

3.3 Materials and components. Material and components shall be as specified herein. Materials not definitely specified shall be of the quality normally used by the manufacturer on his standard flatware provided the completed items comply with all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.3.1 Stainless steel.

3.3.1.1 Bars and shapes. The stainless steel bars and shapes shall conform to type 410 or 420, condition A, of ASTM A276.

3.3.1.2 Sheets and strips. The stainless steel sheets and strips shall conform to type 301, 302, or 304 of ASTM A 167 or type 410 or 430 of ASTM A 176.

3.4 Design and construction. Type 1 flatware shall be graded construction and type 2 flatware shall be ungraded construction. Type 1 flatware shall be constructed of stainless steel specified in 3.3.1.1 or 3.3.1.2 as specified and shall conform to the requirements specified herein and as shown on figures 1 through 11. Type 2 flatware shall be constructed of stainless steel specified in 3.3.1.1 or 3.3.1.2 and conform to the dimensions specified in 3.5.

3.4.1 Type 1, item I, knives.

3.4.1.1 Type 1, style 1 and 2 knives. Type 1, style 1 and 2 knives shall be single piece construction fabricated from material specified in 3.3.1.1 or 3.3.1.2. Styles 1 and 2 knives shall be shaped as shown on figure 1, and shall conform to dimensions shown in table I. All edges except the cutting edge shall be rounded and smooth. The cutting edge of the style 1 knives shall extend a minimum of 3 inches from the blade tip and shall be sharp without any slivers or burrs throughout the entire cutting edge length. The cutting edge of the style 2 knives shall be uniformly, continuously, and distinctly serrated in accordance with the manufacturer's standard practice provided the serrations fully extend not less than 1-3/4 inches from the blade tip. The top edge of the blade shall taper uniformly from the blade tip to a point not more than 3/4-inch from the handle. Blades shall have an average Rockwell hardness between C38 and C53 (see 4.5.2.1). Knife blades shall not lose their corrosion-resisting qualities as a result of the heat-treating process and when tested using a copper sulphate solution as specified in 4.5.1, no trace of copper shall be visible.

3.4.1.2 Type 1, item 1, style 3, butter spreader. The style 3 butter spreader shall be fabricated from material specified in 3.3.1.2. The butter spreader shall have the shape shown on figure 2 and shall conform to dimensions shown in table II. The blade and handle shall have an average Rockwell hardness not less than B85 (see 4.5.2.2). All edges of the blade and handle shall be rounded and smooth.

3.4.2 Type 1, item II, fork. All forks shall be fabricated from material specified in 3.3.1.2. Forks shall have the shapes shown on figure 3 through 6 and shall conform to dimensions shown in tables III through VI. Shank and tines shall have an average Rockwell hardness not less than B85 (see 4.5.2.3). All edges shall be rounded and smooth and the back of the handle shall be concave in accordance with the manufacturer's standard practice. The width and thickness of tines shall taper and shall be pointed at the ends. Inside edges of tines shall be finished so as to keep top and bottom inside edges well rounded.

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.4.3 Type 1, item III, spoons. All spoons shall be fabricated from material specified in 3.3.1.2. Spoons shall be of the shapes shown on figures 7 through 11 and shall conform to dimensions specified in tables VII through XI. The shanks of spoons shall have an average Rockwell hardness not less than B85 (see 4.5.2.4). All edges of handles shall be rounded and smooth and the edges of the spoon bowls shall be rounded and ground smooth. The back of the spoon handles shall be concave in accordance with the manufacturer's standard practice.

3.5 Type 2 flatware. Type 2 flatware dimensions shall be as follows:

Item	Minimum thickness 1/	Minimum length o/A
Knife, blade	0.034	8-3/8
Forks	0.055	7
Teaspoon	0.043	5 15/16
Tablespoon, medium (dessert)	0.048	7
Tablespoon, large	0.048	7 15/16

1/ Thickness is constant throughout the length of the item except for fork tines.

3.5.1 Type 2, item I, knife table. Type 2, item 1, table knife shall be of a one piece construction fabricated from material specified in 3.3.1.1 or 3.3.1.2. All edges except cutting edge shall be rounded and smooth. The cutting edge shall extend a minimum of 3-inches from the blade tip and shall be sharp without any slivers or burrs throughout the entire cutting edge length. Knife blade shall have a Rockwell hardness of C38 to C53 (see 4.5.2.1).

3.5.2 Type 2, item II fork and item III spoons. Type 2, item II forks and item III spoons shall be fabricated from stainless steel specified in 3.3.1.2. Shanks, tines and bowls shall have a minimum Rockwell hardness of B85 when tested as specified in 4.5.2.2 or 4.5.2.3, as applicable. All edges shall be broken by grinding, coining, tumbling or vibrating. Shanks shall be beaded, concaved, or stiffened in accordance with the manufacturers standard practice. Fork tines shall be tapered and inside edges of the tines shall be ground, coined or formed so as to keep top and bottom inside edges well rounded.

3.6 Finish. After fabrication, flatware shall be free of all rough and protruding edges. Type 1 knives and spoons shall be given a No. 7 commercial finish or a bright or mirror finish and the forks shall be finished to a surface roughness not exceeding 7 micro inches on all surfaces and exterior edges except between the fork tines. Type 2 flatware shall be given a bright or mirror finish on all surfaces and edges except between fork tines. All flatware shall be free of discoloration and stains.

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.7 Marking for identification. The manufacturer's name, trade name or trademark of such known character easily identifiable with said manufacturer shall be applied. The marking shall be indented or embossed on the back of the shank of forks and spoons and on the handle or blade of knives adjacent to the blade or handle in accordance with the manufacturer's standard practice. The surface opposite the markings shall show no signs of penetration.

3.8 Workmanship. The finished flatware shall be clean and smooth and shall not contain any burrs, rough die, tool, gouge, or grind marks or burn marks. The finished items shall not be fractured, dented, bent, punctured, or malformed. There shall be no defects which may impair serviceability, durability or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required it shall be examined for defects listed in table XII and dimensions specified herein, and tested as specified in 4.5.1, if applicable, and 4.5.2. Failure to pass any test shall be cause for rejection of the first article. The presence of any defects listed in table XII or any dimension not within specified requirements shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.4.2 End item inspection. The inspection lot shall be the number of knives, forks, or spoons of one type, item, and style offered for inspection at one time. The sample unit for this inspection shall be one completely fabricated knife, fork, or spoon.

4.4.2.1 Visual examination. The flatware shall be examined for defects in table XII. The inspection level shall be level II with an acceptable quality level (AQL) of 1.5 for major defects and 4.0 for total defects, expressed in terms of defects per hundred units.

TABLE XII Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Type 1 flatware not equal to a commercial No. 7 finish or a mirror, or bright finish except fork tines and all exterior edges.		X
	Fork tines not smooth.	X	
	Evidence of discoloration, or stains.	X	
	Type 2 not as specified.	X	
Construction and workmanship (general) (applicable to all components and assemblies)	Any burrs, slivers, sharp edges, rough die, or tool gouge.	X	
	Any knife, fork, or spoon fractured, dented, or malformed.	X	
Knives	All edges, except the cutting edge, not rounded and smooth (except cutting edge of type 1, style 3).	X	
	Knives not single piece construction.	X	
	Cutting edge not free from roughness (type 1 and type 2, style 1).		X
	Cutting edge serrations not uniformly, continuously, and distinctly serrated (type 1, style 2).	X	
	Top of knives not tapered back from the point (type 1 and type 2, styles 1 and 2).		X
Forks	Edge of tines not rounded.		X
	Tines not tapered.	X	
	Inside of tines not finished as specified.	X	

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

TABLE XII Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Forks (cont'd)	All outer edges not rounded and smooth.	X	
	Handle not as specified i.e., not concave.		X
Spoons	Edges of bowl and handle not rounded or smooth.	X	
	Bowl edge split.	X	
	Spoon handle not concave.		X
Identification marking	Missing, incomplete, or illegible.		X
	Surface opposite marking is penetrated.	X	
	Surface opposite marking is uneven.		X

4.4.2.2 Dimensional examination. Examination shall be made of the end items for dimensions specified. Any dimension not within tolerance shall be a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.4.2.3 Testing of the end product. Type 1, item I, style 1 and 2 knives and type 2, item I knives shall be tested as specified in 4.5.1. All flatware shall be tested in accordance with 4.5.2. The inspection level for both tests shall be S-2 with an AQL of 2.5, expressed in terms of defects per hundred units.

4.4.3 Inspection of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 are complied with. Defects shall be indicated in accordance with defects set forth in table XIII. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE XIII Examination of preparation for delivery

Examine	Defect
Markings (exterior and interior container)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Contents	More or less than required.

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.4.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.5 Tests.

4.5.1 Corrosion tests. Knives selected in accordance with 4.4.2.3 shall be tested for corrosion-resistance. Test samples shall be scrubbed with soap and warm water, rinsed in hot water, followed by a dip in ethyl alcohol (95 percent) and dried. Three drops of copper-sulphate solution shall be placed at intervals upon the blade surface of the knife undergoing the test. After the solution has been allowed to remain on the surface for 6 minutes, the solution shall be removed by a cloth saturated in clean water and the surface checked. Inability of the knives to meet requirements in 3.4.1 shall constitute failure of the test. The copper-sulphate solution shall be made as follows:

Copper-sulphate ($CuSO_4 - 5H_2O$)	4.0 grams
Sulphuric Acid (H_2SO_4) (sp. gr. 1.84)	10.0 milliliters
Water (H_2O)	90.0 milliliters

4.5.2 Hardness tests. Flatware items shall be prepared and tested for hardness in accordance with ASTM E 18. Hardness tests shall be made in the locations specified in 4.5.2.1 through 4.5.2.4 for the item specified. Inability of the items to meet the average of the three readings for the hardness requirements shall constitute failure of the test.

4.5.2.1 Type 1, item I, style 1 and 2 knives and type 2, item I knife. If necessary for the performance of this test, the knife blade may be ground parallel where the hardness test is to be performed. When grinding is accomplished, care shall be taken not to overheat the metal. Three readings shall be taken on the blade of the knives, located at points 1/2-inch from the end, midway, and 1/2-inch from NN as shown on figure 1 to determine conformance to 3.4.1.1 for type 1, item I, styles 1 and 2 knives. Type 2, item I knife readings shall be taken in the locations similar to figure 1 to determine conformance to 3.5.1.

4.5.2.2 Item I, style 3, butter spreader. One reading on each butter spreader midway between AA and BB; one reading midway between BB and CC; and one reading midway between CC and DD (see figure 2) shall be taken to determine conformance to 3.4.1.2.

4.5.2.3 Types 1 and 2, item II, forks. One reading on each style fork midway between AA and BB; one reading between BB and CC; and one reading within 3/8-inch of CC on the handle as shown on figure 3 through 6 as applicable shall be taken to determine conformance to 3.4.2 for type 1, item II forks. Type 2 fork readings shall be taken in the locations similar to figure 3 to determine conformance to 3.5.2.

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.5.2.4 Types 1 and 2, item III, spoons. One reading on each style spoon at DB; one reading midway between CC and AA; and one reading midway between AA and BB as shown on figure 7 through 11 shall be taken to determine conformance to 3.4.3 and 3.5.2, as applicable.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Twenty-four knives of one type, reversed end for end; or twenty-four forks of one type with tines at one end; or twenty-four spoons of one type and one style only, shall be packaged in a commercial, paperboard box. Each knife, fork, and spoon shall be interleaved with one or two sheets of tissue paper having a combined minimum basis weight of 20 pounds per ream (24 x 36 - 480) or individually enclosed in a polyethylene sleeve in accordance with manufacturer's standard commercial practice. Each box shall be securely closed.

5.1.1.2 Intermediate package. One hundred and twenty knives, forks, or spoons of one type and one style only, unit packaged as specified in 5.1.1.1, shall be packed in a setup or corrugated fiberboard box. The setup box shall be a full-telescope paperboard box with the top and bottom made from 0.050 inch newsboard covered with 40 pound kraft paper stayed at four corners with 90 pound staypaper. Closure of the setup box shall be effected by means of a strip of 2-inch minimum width gummed, kraft paper tape applied around the center girth of the box and overlapping not less than 2 inches. The fiberboard box shall conform to style RSC, type CF, variety SW, class domestic of PPP-B-636. Closure of the fiberboard box shall be in accordance with method II of the appendix of the box specification.

5.1.2 Level C. Flatware shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Flatware, packaged as specified in 5.1, shall be packed in the quantity as specified in table XIV in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding shall be in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

TABLE XIV Quantity per shipping container

Item				Qauntity per shipping container
I.	Knife			
	Type 1	Style 1	- Utility, table	360
	Type 1	Style 2	- Serrated, table	360
	Type 1	Style 3	- Butter spreader	360
	Type 2			360
II.	Fork			
	Type 1	Style 1	- Utility, table	720
	Type 1	Style 2	- Cocktail	720
	Type 1	Style 3	- Dessert	720
	Type 1	Style 4	- Salad	720
	Type 2			720
III.	Spoon			
	Type 1	Style 1	- Tea	720
	Type 2	Style 1		720
	Type 1	Style 2	- Dessert	720
	Type 2	Style 2		720
	Type 1	Style 3	- Table, large	360
	Type 2	Style 3		360
	Type 1	Style 4	- Iced tea	720
	Type 1	Style 5	- Bouillon	720

5.2.2 Level B. Flatware, packaged as specified in 5.1, shall be packed in the quantity as specified in table XIV in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be V3c, V3s, or V4s fiberboard box, fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C. Flatware, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior boxes and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, interior boxes and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Type 1 flatware is intended for use in food service installations of Government agencies and type 2 flatware is intended for use in field kitchens and mess outfits in the Forest Service Fire Camps.

6.2 Ordering data. Purchasers should select the preferred options permitted and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Item and style of flatware required (see 1.2).
(c) First article. Whether preproduction sample is required (see 3.1).
(d) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 For civil agency procurements. When level B packaging is required for civil agency procurements, the requirements in 5.1.1 level A packaging shall apply.

6.4 Supersession data. Items covered by Federal Specification RR-F-00455 (GSA-FSS) dated 6 October 1964 are identified in this specification as "Type 2", items I; II; and III, styles 1, 2 and 3.

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

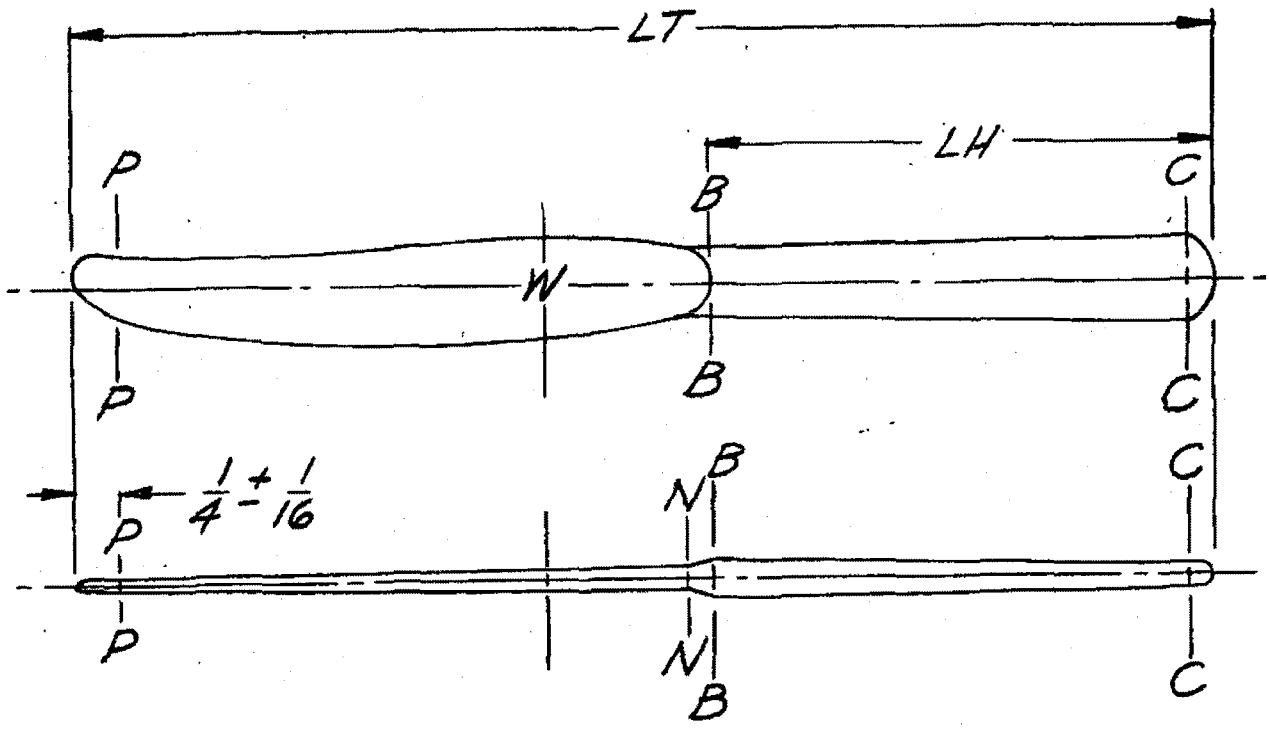


FIGURE 1 - Knives, type 1, item I, styles 1 and 2.

TABLE I - Type 1, item I, styles 1 and 2, knives

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	8-3/8	9-1/16
Handle length	LH	3-3/4	4-1/4
Widest blade section	W	0.705	0.790
Width at end of neck radius on handle	BB	.475	.540
Thickness at end of neck radius	BB	.215	.280
Width of handle at end of radius	CC	.575	.660
Thickness of handle at end of radius	CC	.185	.215
Blade thickness where radius starts	NN	.070	.115
Blade thickness (point)	PP	.025	.045

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

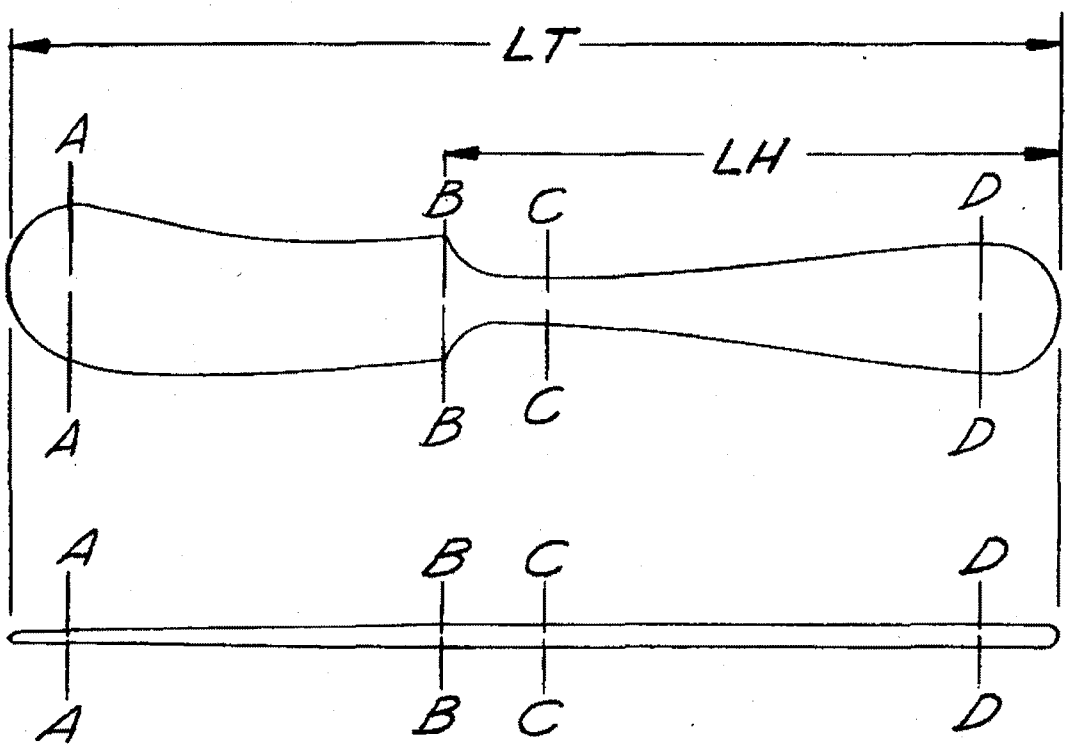


FIGURE 2 - Spreader, butter, type 1, item I, style 3.

TABLE II - Type 1, item I, style 3 butter spreader

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	5-3/4	6-5/16
Handle length	LH	3-1/4	4
Width at section AA	AA	0.635	0.795
Thickness at section AA	AA	.045	.075
Width at section BB	BB	.500	.625
Thickness at section BB	BB	.055	.080
Width at section CC	CC	.175	.235
Thickness at section CC	CC	.050	.125
Width at section DD	DD	.630	.750
Thickness at section DD	DD	.060	.085

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

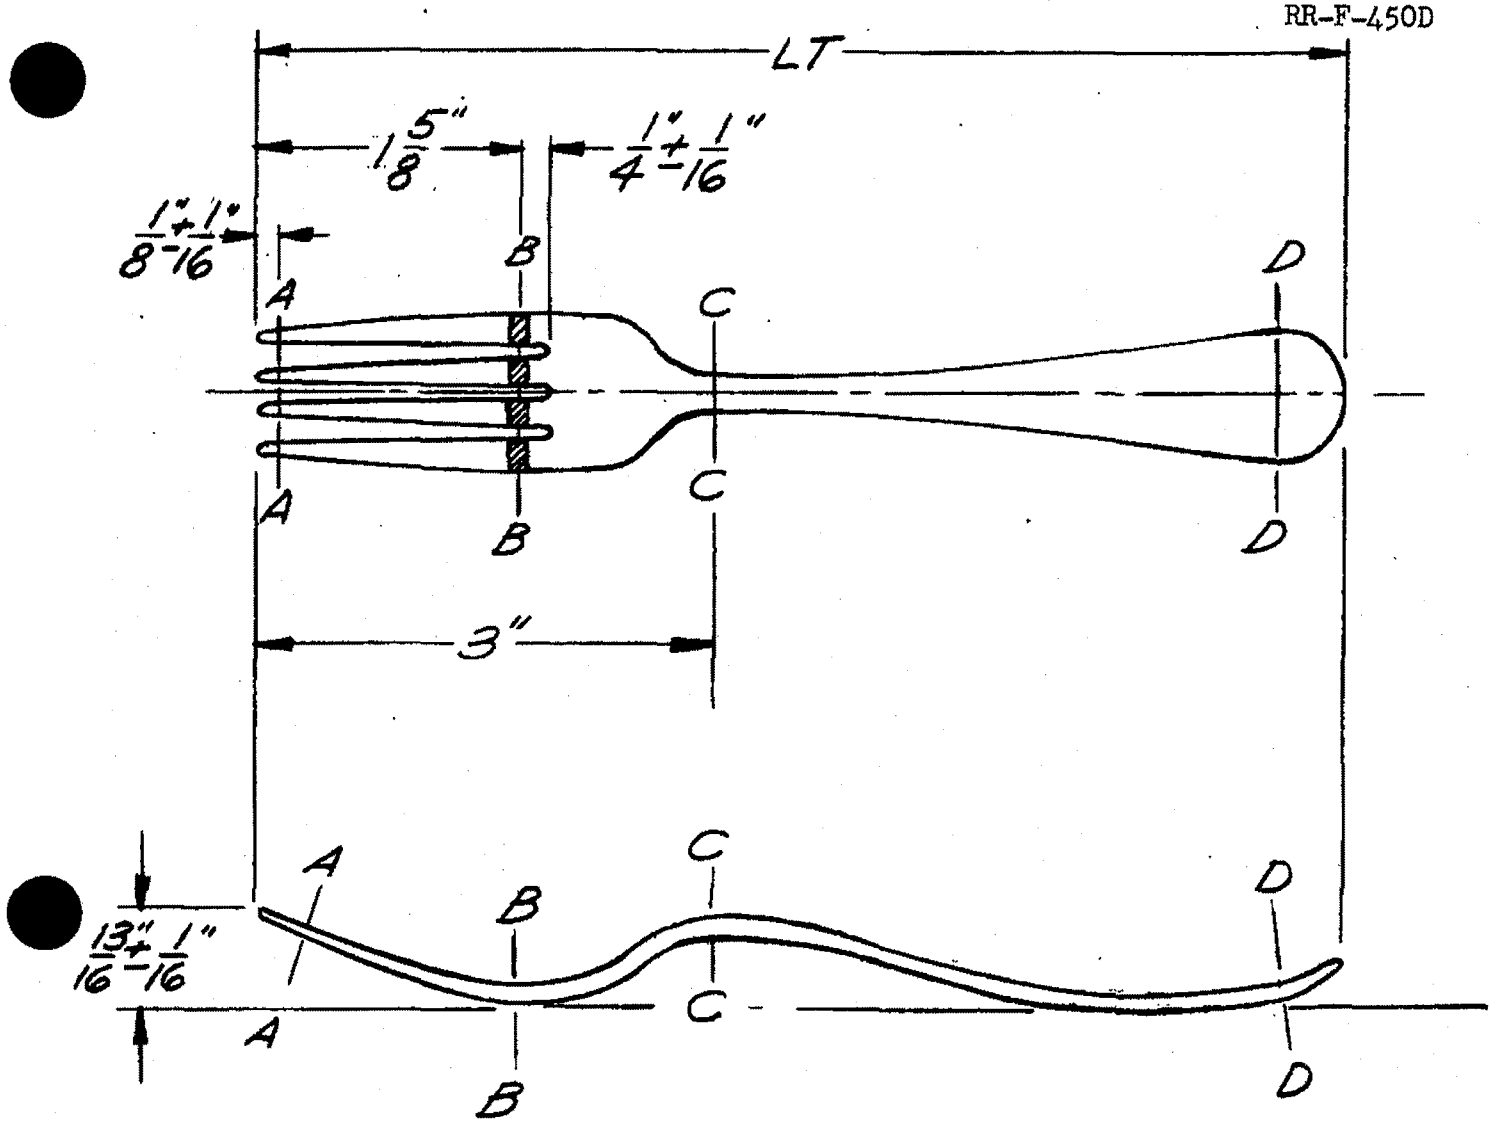


FIGURE 3 - Fork, utility, type 1, item II, style I.

TABLE III - Type 1, item II, style 1, utility fork

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	6-15/16	7-1/8
Width at AA	AA	0.700	0.775
Thickness at AA	AA	.060	.080
Width at BB	BB	.900	.950
Thickness at BB	BB	.080	.095
Width at CC	CC	.190	.260
Thickness at CC	CC	.080	.135
Maximum width of handle	DD	.735	.860
Thickness at widest point of handle	DD	.060	.095

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

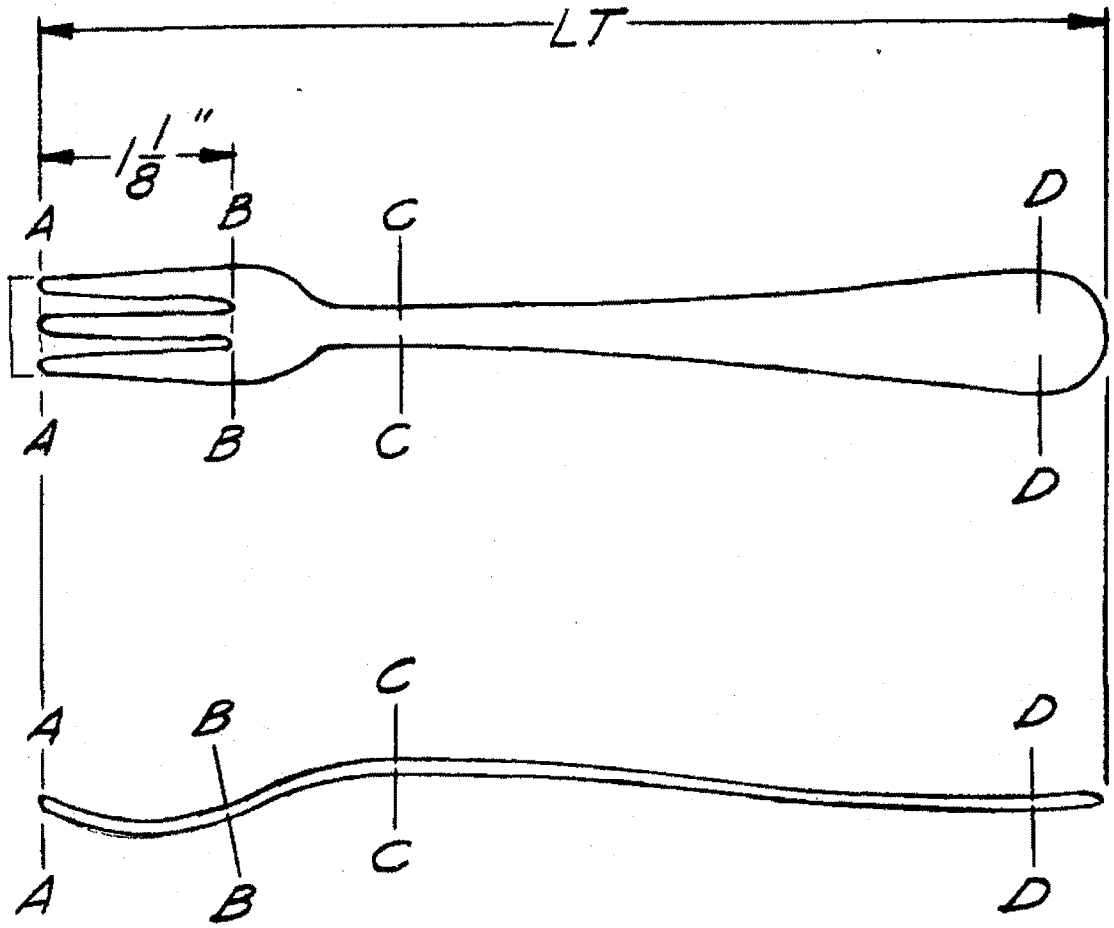


FIGURE 4 - Fork, cocktail, type 1, item II, style 2.

TABLE IV - Type 1, item II, style 2, cocktail fork

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	5-1/2	6-1/8
Width at section AA	AA	0.425	0.525
Thickness at section AA	AA	.030	.085
Width at section BB	BB	.585	.675
Thickness at section BB	BB	.045	.105
Width at section CC	CC	.150	.235
Thickness at section CC	CC	.055	.125
Width at section DD	DD	.550	.665
Thickness at section DD	DD	.040	.090

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

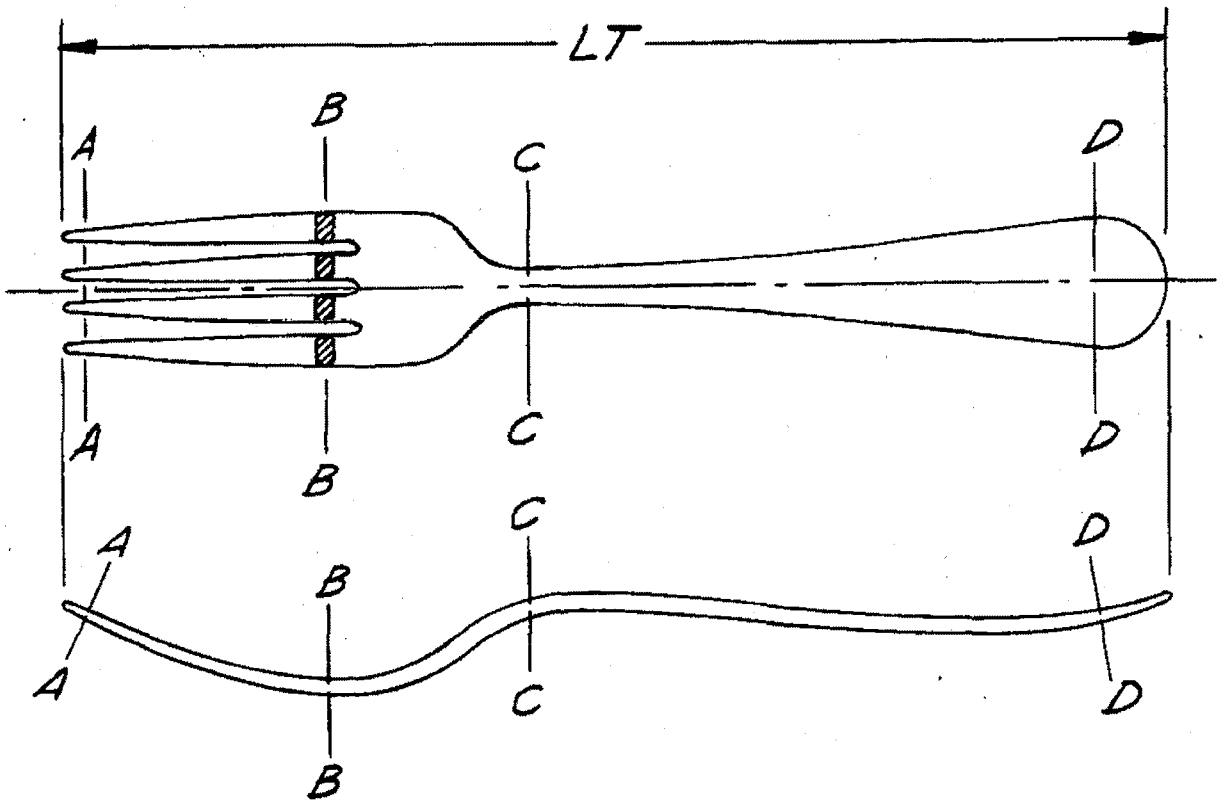


FIGURE 5 - Fork, dessert, type 1, item II, style 3.

TABLE V - Type 1, item II, style 3, dessert fork

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	6-1/2	7-1/2
Width at section AA	AA	0.670	0.720
Thickness at section AA	AA	.050	.085
Width at section BB	BB	.875	.925
Thickness at section BB	BB	.070	.130
Width at section CC	CC	.200	.265
Thickness at section CC	CC	.060	.125
Width at section DD	DD	.730	.875
Thickness at section DD	DD	.060	.110

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

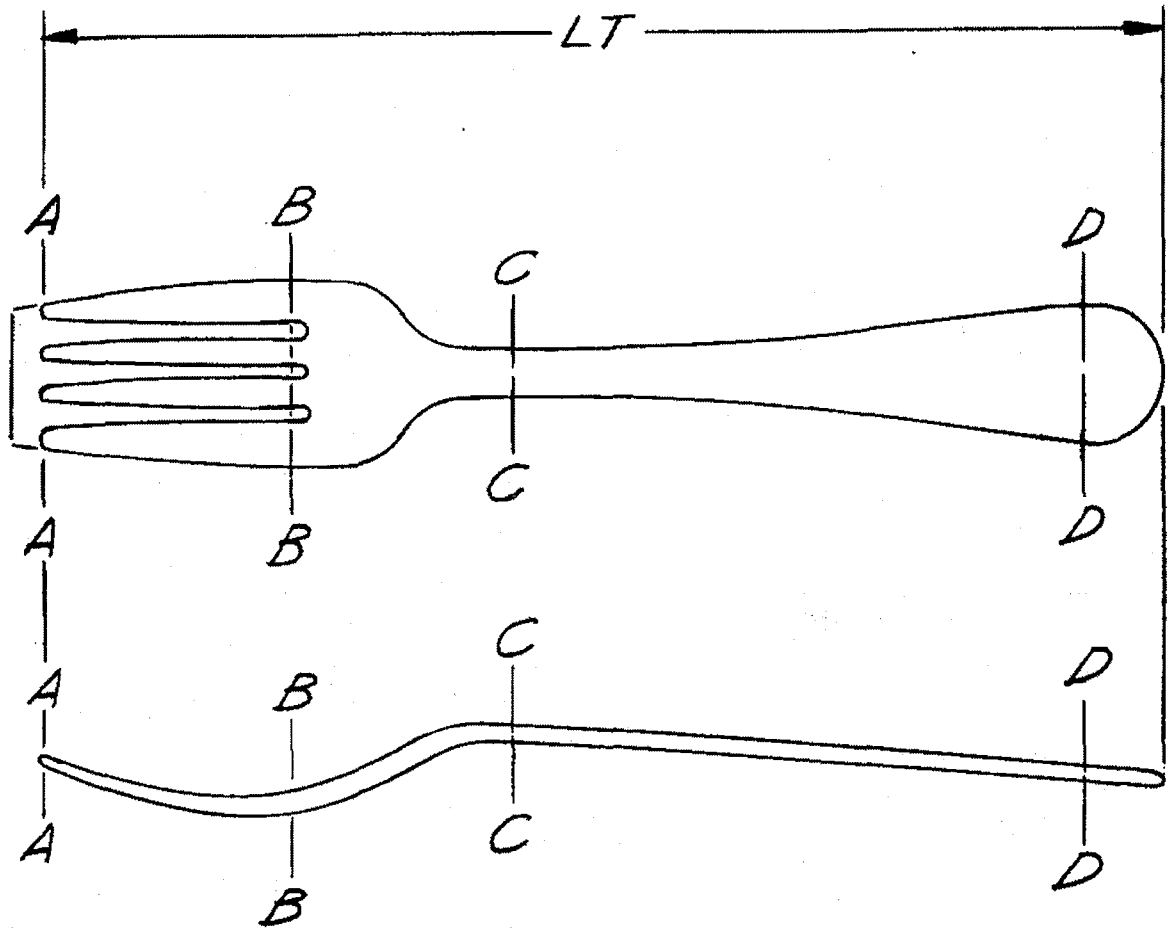


FIGURE 6 - Fork, salad, type 1, item II, style 4.

TABLE VI - Type 1, item II, style 4, salad fork

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	5-7/8	6-1/4
Width at section AA	AA	0.725	0.875
Thickness at section AA	AA	.050	.085
Width at section BB	BB	.950	1.025
Thickness at section BB	BB	.070	.100
Width at section CC	CC	.200	.240
Thickness at section CC	CC	.060	.125
Width at section DD	DD	.615	.750
Thickness at section DD	DD	.065	.090

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

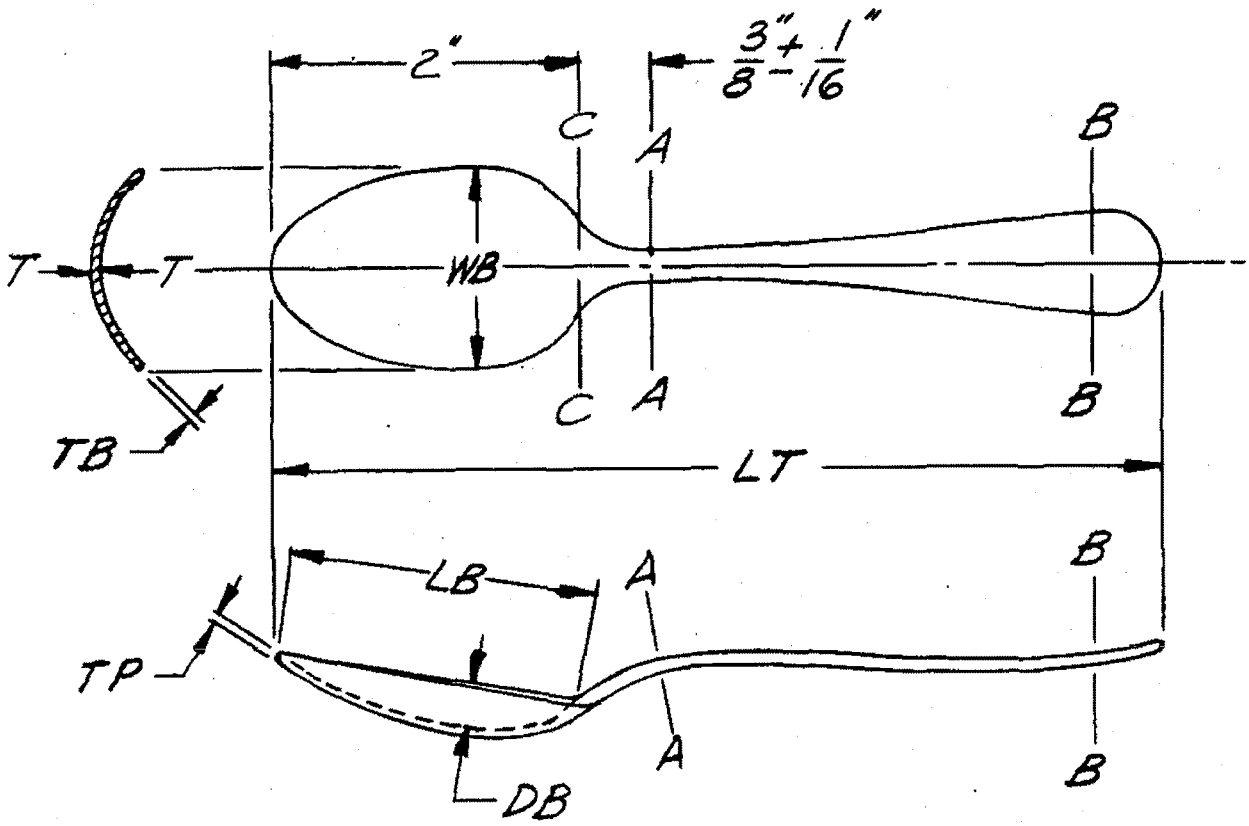


FIGURE 7 - Teaspoon, type 1, item III, style 1.

TABLE VII - Type 1, item III, style 1, teaspoon

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	5-15/16	6-1/16
Bowl length	LB	1-15/16	2-1/16
Width of bowl at widest point	WB	1-7/32	1-5/16
Depth of bowl at deepest point (inside)	DB	0.225	0.275
Width of section AA	AA	.190	.235
Thickness at section AA	AA	.070	.100
Maximum width of handle	BB	.685	.750
Thickness at widest point of handle	BB	.065	.085
Edge thickness at WB	TB	.030	.050
Edge thickness at bowl point	TP	.025	.045
Thickness of bowl bottom at WB	TT	.035	.050

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

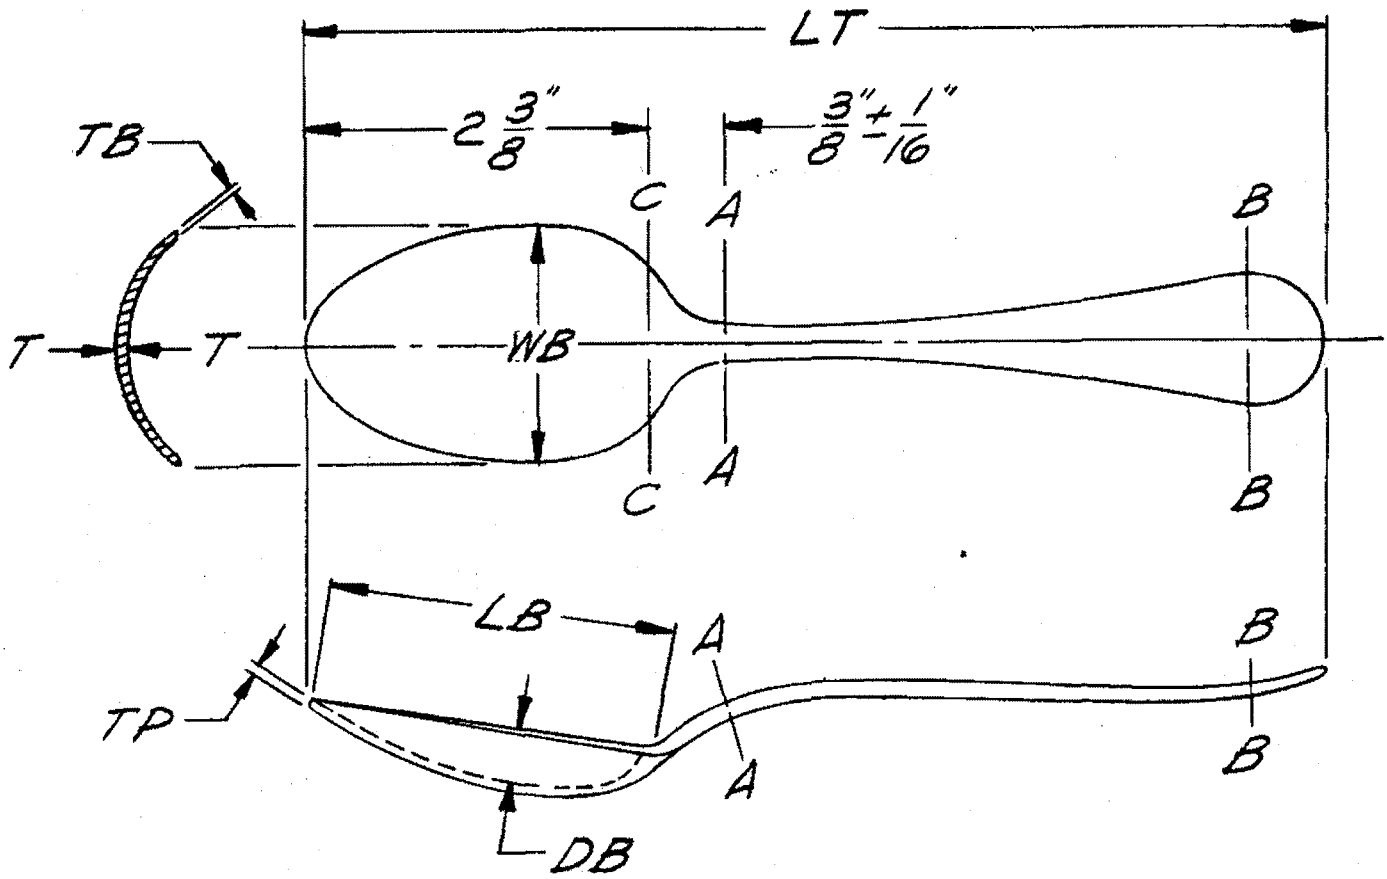


FIGURE 8 - Spoon, dessert, type 1, item III, style 2.

TABLE VIII - Type 1, item III, style 2, spoon, dessert

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	7-3/16	7-5/16
Bowl length	LB	2-1/4	2-1/2
Width of bowl at widest point	WB	1-1/2	1-19/32
Depth of bowl at deepest point (inside)	DB	0.265	0.346
Width at AA	AA	.215	.265
Thickness at AA	AA	.085	.105
Maximum width of handle	BB	.740	.850
Thickness at widest point of handle	BB	.065	.105
Edge thickness at WB	TB	.030	.065
Edge thickness at bowl point	TP	.027	.045
Thickness of bowl bottom at WB	TT	.033	.065

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

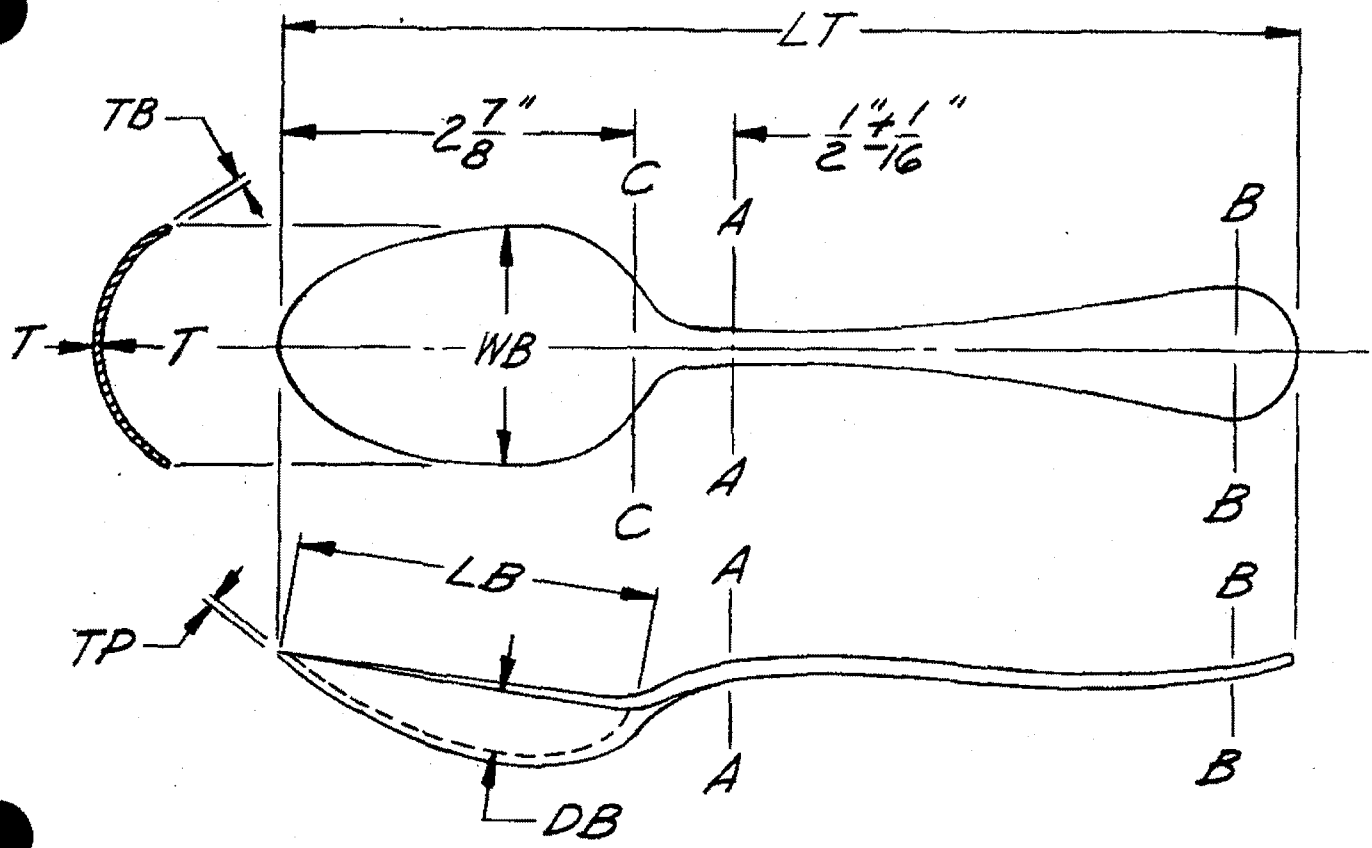


FIGURE 9 - Tablespoon (large), type 1, item III, style 3.

TABLE IX - Type 1, item III, style 3, tablespoon (large)

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	8-3/8	8-1/2
Bowl length	LB	2-11/16	2-15/16
Width of bowl at widest point	WB	1-3/4	1-13/16
Depth of bowl at deepest point (inside)	DB	0.360	0.420
Width at AA	AA	.230	.280
Thickness at AA	AA	.085	.126
Maximum width of handle	BB	.920	.985
Thickness at widest point of handle	BB	.075	.105
Edge thickness at WB	TB	.030	.065
Edge thickness at bowl point	TP	.030	.055
Thickness of bowl bottom at WB	TT	.035	.065

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

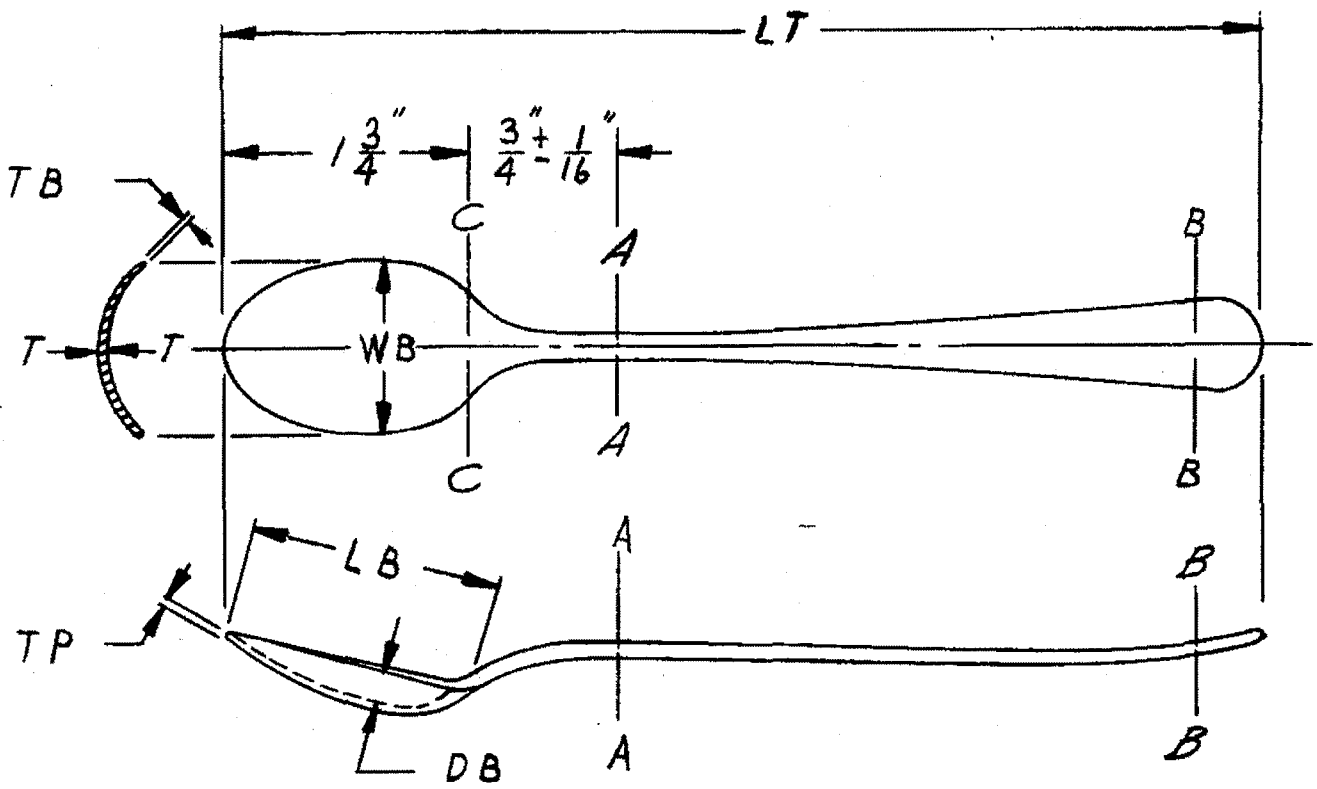


FIGURE 10 - Spoon, iced tea, type 1, item III, style 4.

TABLE X - Type 1, item III, style 4, spoon, iced tea

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	7-9/16	8-1/8
Bowl length	LB	1-3/4	2-1/16
Width of bowl at widest point	WB	1-1/16	1-3/8
Depth of bowl at deepest point (inside)	DB	0.195	0.312
Width at AA	AA	.165	.235
Thickness at AA	AA	.065	.105
Maximum width of handle	BB	.625	.750
Thickness at widest point of handle	BB	.065	.085
Edge thickness at WB	TB	.030	.050
Edge thickness at bowl point	TP	.028	.043
Thickness of bowl bottom at WB	TT	.030	.050

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

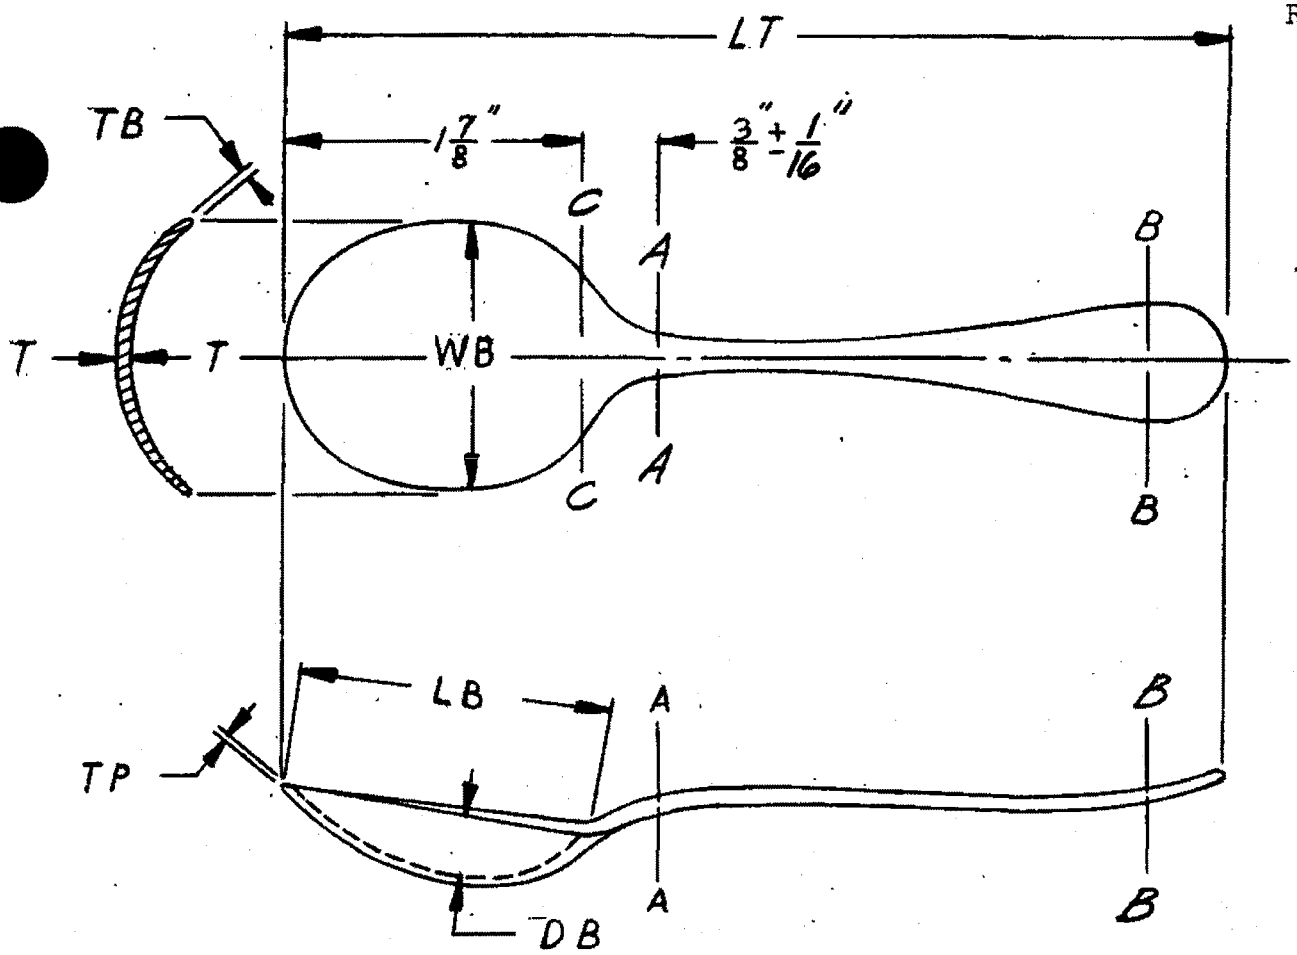


FIGURE 11 - Spoon, bouillion, type 1, item III, style 5.

TABLE XI - Type 1, item III, style 5, spoon, bouillion

MEASUREMENTS	DESIGNATION	DIMENSIONS	
		MINIMUM	MAXIMUM
		Inches	Inches
Overall length	LT	5-11/16	6-1/8
Bowl length	LB	1-13/16	2-1/16
Width of bowl at widest point	WB	1-7/16	1-11/16
Depth of bowl at deepest point (inside)	DB	0.260	0.330
Width at AA	AA	.195	.250
Thickness at AA	AA	.065	.100
Maximum width of handle	BB	.620	.710
Thickness at widest point of handle	BB	.065	.100
Edge thickness at WB	TB	.028	.045
Edge thickness of bowl point	TP	.025	.040
Thickness of bowl bottom at WB	TT	.028	.045

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MC, MS
Air Force - 45

User activity:

Navy - YD, CG

Preparing activity:

Army - GL

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Project No. 7340-0071

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

Flatware, Stainless Steel RR-F-450D

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK LABORATORIES
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

STSNLT-EQS

Commander
US Army Natick Laboratories
ATTN: STSNLT-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2015-09-04T18:35Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.