RR-F-575B
August 11, 1970

SUPERSEDING
Int. Fed. Spec. RR-F-00575a(GSA-FSS)
July 28, 1966
(See 6.4)

FEDERAL SPECIFICATION

FOOD TURNERS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers food turners.

1.2 Classification. Food turners covered by this specification shall be of the types and classes as specified (see 6.2).

Type I	-	Solid blade (plastic handle)
Class A	-	Steak or cake
Class B	-	Hamburger
Type II	-	Perforated blade (plastic handle)

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

L-P-394	-	Plastic Molding Material, Propylene, Injection and Extrusion.
UU-P-553	-	Paper, Wrapping, Tissue.
PPP-B-566	-	Boxes, Folding, Paperboard.
PPP-B-636	-	Boxes, Fiberboard.
PPP-B-676	-	Boxes, Set-up, Paperboard.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-130	-	Identification Marking of U.S. Military Property
MIL-STD-147	-	Palletized and Containerized Unit Loads, 40" by 48" Pallets, Skids, Runners, or Pallet-Type Base

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

American Society for Testing and Materials (ASTM) Standards:

E18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials.
A167 - Corrosion-Resisting Chromium Nickel Steel Plate, Sheet and Strip.
A176 - Corrosion-Resisting Chromium Steel Plate, Sheet and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

National Classification Board:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, ATTN: Tariff Order Section, 1616 P Street, N. W., Washington, D. C. 20036.)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 802 Union Station, Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. This specification contains provisions for first article test and approval (see 4.2, 6.2, and 6.5).

3.2 Standard product. The food turners delivered under this specification shall be the manufacturer's standard commercial product, except for any changes necessary to comply with specification requirements.

3.3 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for food turners provided the completed items comply with all provisions of this specification. Commercial tolerances are applicable to all metal thicknesses, unless otherwise specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.4 Construction.

3.4.1 Type I, solid blade (plastic handle). The type I food turners shall be class A or B. The class A food turner shall conform to figure 1 and the class B food turner shall conform to figure 2.

3.4.1.1 Handle. The handle shall be of polypropylene plastic conforming to type I of L-P-394. The handle shall be two-piece, solid-slotted, or molded. The two-piece handle shall have a tang extending the full width and length of the handle and shall fit flush with the corners, sides and ends rounded in accordance with the manufacturer's standard practice. The solid-slotted handle shall have a tang extending the full width and not less than half the length of the handle and shall fit flush on the sides. The end of the tang shall contact the bottom of the slot. The molded handle shall be molded to the tang or shank and shall have a smooth rounded surface on the sides and ends. The fit between the handle and tang shall be close and uniform at all points. All handles shall have a molded hole at the end of sufficient size to allow the turner to be hung from a hook. The plastic handle shall withstand a temperature of 190 F., plus or minus 5 F. without warping or loosening when tested in accordance with 4.5.1.

3.4.1.2 Class A. The blade and tang for the class A food turner shall be formed from one piece of corrosion-resisting steel, conforming to either type 410 or 420 of ASTM A176. One edge shall be sharpened for cutting or chopping food. The blade shall have a Rockwell hardness between C30 and C45 (see 4.5.2). The blade shall be capable of being bent through an arc of 60 degrees from the normal position without any visual indication of permanent deformation (see 4.5.3). Rivets used for securing the blade and tang to the handle shall be brass, standard cutlery compression type. Head of rivets shall be not less than five sixteenths of an inch diameter and shall be flush with the handle. Rivets shall completely fill the holes in the tang and handle and shall be securely set.

3.4.1.3 Class B. The blade and tang for the class B food turner shall be formed from one piece of corrosion-resisting steel conforming to any type in the 300 series of ASTM A167, or any type in the 400 series of ASTM A176. The blade shall have a Rockwell hardness between C30 and C45 when tested in accordance with 4.5.2.

3.4.1.4 Finish. Handle and tang shall be finished to form a smooth continuous surface. Handle shall be finished in accordance with manufacturer's commercial practice. The blade for class A food turners shall have a standard number 7, high luster, polish finish. The blade for class B food turners shall have a commercial polished finish.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T12:10Z
Check the source to verify that this is the currentversion before use.

3.4.2 Type II, perforated blade (plastic handle). Type II food turners shall conform to figure 3. The plastic for the handle shall be of polypropylene plastic conforming to type I of L-P-394. The handle shall be molded to the tang or shank. Handles shall have a molded hole at the end of sufficient size to allow the turner to be hung from a hook. The plastic handle shall withstand a temperature of 190 F., plus or minus 5 F., without warping or loosening when tested in accordance with 4.5.1.

3.4.2.1 Blade and shank. The blade and shank shall be fabricated from corrosion-resisting steel conforming to any type in the 300 series of ASTM A167, or any type in the 400 series of ASTM A176. The tang shall be upset or pierced to prevent the handle from slipping off the tang after molding (see 4.5.4). The shank, in addition to being riveted as shown on figure 3, may be projection welded or spot welded to the blade. The rivets shall be 1/8-inch diameter oval head stainless steel. The blade shall have a series of drain holes or slots through the blade. The blade shall have a Rockwell hardness between C30 and C45 when tested in accordance with 4.5.2.

3.4.2.2 Finish. Plastic shall be smooth and all sharp fins shall be removed by filing or sanding. Handles shall have normal finish of molded plastic. Blades shall have a commercial polished finish.

3.5 Identification marking. The food turners shall be marked with the manufacturer's name, trade name, or trademark of such character as to be identified with the said manufacturer. Marking shall be applied in accordance with MIL-STD-130.

3.6 Workmanship. The finished food turners shall be clean and free from cracks, sharp edges (except cutting edge of class A), burrs, nicks, rust, and pits.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. When a preproduction sample is required, it shall be examined for defects in table I and for compliance with dimensions specified, and tested as specified in 4.5.1, 4.5.2, 4.5.3, and 4.5.4, as applicable. Failure to pass any test shall be cause for rejection of the preproduction sample. The presence of any defect listed in table I or any dimension not within specified requirements shall be cause for rejection of the preproduction sample.

4.3 Inspection. Sampling for inspection and acceptance shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End item inspection. The lot shall consist of all food turners of one type and class offered for inspection at one time. The sample unit shall be one completely fabricated food turner.

4.3.2.1 Visual examination. Inspection shall be made of food turners for the defects listed in table I. The inspection level shall be S-3 with an acceptable quality level (AQL) of 2.5 expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect
Finish	Finish not as specified
Construction and workmanship	Not in accordance with specified design requirements
	Cracks, sharp edges (except class A), burrs, nicks, rust, pits
Type I	Handles not plastic
	Handle and tang not flush
	Handle not one or two piece
	Hole in handle missing
	Rivets not as specified
	One or more rivets missing
	One edge of class A blade not sharpened

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defect
Construction and workmanship (con.)	
Type II	Handle not plastic Hole in handle missing Slots in blade missing
Identification marking	Missing, incomplete, incorrect, illegible, or not as specified

4.3.2.2 Dimensional inspection. An inspection shall be made to determine compliance with dimensions specified. Any noncompliance shall be considered a defect. The inspection level shall be S-2 with an AQL of 6.5 expressed in terms of defects per hundred units.

4.3.2.3 Testing of the end item. The end item shall be tested as specified in 4.5.1, 4.5.2, 4.5.3, and 4.5.4, as applicable. The inspection level shall be S-2 with an AQL of 2.5 expressed in terms of defects per hundred units.

4.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings (exterior and interior container)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Component missing, damaged, or otherwise defective
Contents	Number per container is more or less than required

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.4.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.4.2 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be as indicated in table III. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE III. Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement
Palletization	Not as specified Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

4.5 Tests.

4.5.1 Heat resistance. Food turners shall be suspended in an air oven maintained at a temperature of 190 F., plus or minus 5 F. for a period of 5 hours. The food turners shall be removed and checked for compliance with 3.4.1.1 or 3.4.2 as applicable. Any noncompliance shall constitute failure of this test.

4.5.2 Hardness. Food turners shall be tested in accordance with ASTM E18 for compliance with blade hardness requirements of 3.4.1.2, 3.4.1.3, and 3.4.2.1, as appicable. Any noncompliance shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.5.3 Flexibility. The entire handle of the type I, class A food turner shall be secured between the jaws of a vise with the end of the blade in a vertical postion. The blade of the food turner shall be moved through an arc of 60 degrees each side of the vertical plane, a total of 120 degrees. The test shall be repeated with the blade secured between the jaws of the vise, 1-1/2 inches up from the tip, and the end of the handle moved through the arcs specified above. During and after the tests the food turner shall be examined to determine compliance with 3.4.1.2. Any noncompliance shall constitute failure of this test.

4.5.4 Handle test. Type II turners shall be tested to determine the molded handle is securely fastened to the tang. The tang shall be held in a vise or clamp and a pull force of 25 pounds shall be applied to the molded handle parallel to the tang to determine conformance to 3.4.2.1.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Twelve turners of one type and class shall be packaged in a snug fitting box conforming to PPP-B-566, PPP-B-676 or PPP-B-636. Prior to packaging each turner shall be completely wrapped with tissue paper conforming to UU-P-553. Each box shall be closed in accordance with the appendix of the applicable box specification.

5.1.2 Level C. The turners shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Ninety-six turners of one type and class packaged as specified in 5.1, shall be packed in a snug fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Ninety-six turners of one type and class packaged as specified in 5.1 shall be packed in a snug fitting fiberboard shipping container conforming to style RSC, type CF, variety SW or type SF, class domestic of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall be a V3c, V3s, or V4s fiberboard box, fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C. Turners, packaged as specified in 5.1, shall be packaged in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Palletization (Military requirements). Unless otherwise specified (see 6.2), turners packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the patterns of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.4.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Food turners are intended to be used in kitchens, dining halls, and galleys for turning food such as pancakes, eggs, steak, meat, potato patties, and bacon. Turners may also be used for serving.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and class required (see 1.2).
(c) First article (see 3.1, 4.2 and 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.


(d) Selection of the applicable level of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing case (see 5.2.2.1).
(f) When palletization is not required (see 5.3).


6.4 Supersession data. This specification includes the requirements of MIL-F-21662A and is identified herein as type I, class A. The type III food turner covered by RR-F-00575A(GSA-FSS) has been deleted herein and is covered in MIL-U-10815.

6.5 First article. The item covered by this specification requires first article test and approval under the appropriate provisions of paragraph 7-104.55 of the Armed Services Procurement Regulations. The first article should be a preproduction sample. The first article should consist of one unit. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examination, test and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

NOTE: ------- DOTTED LINES SHOW ALTERNATE METHOD OF CONSTRUCTION.

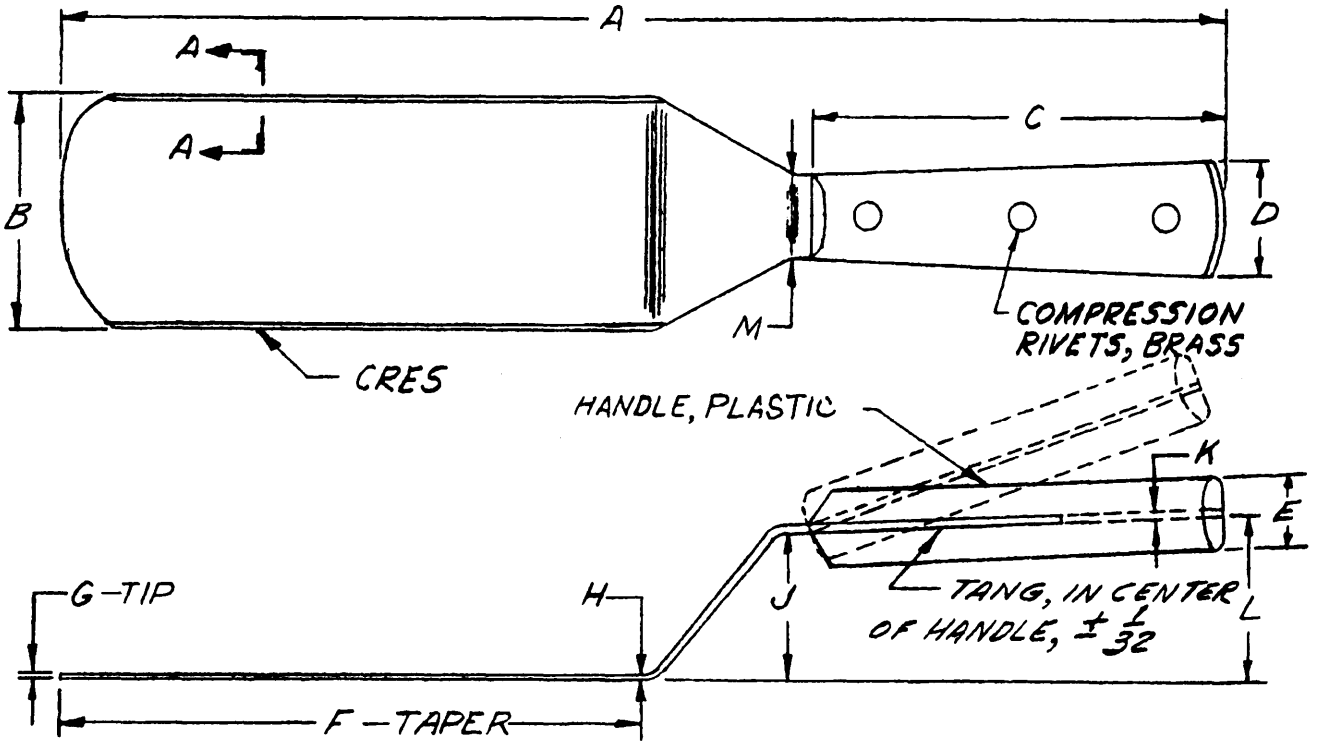




SECTION A-A

DIMENSIONS IN INCHES																							
A		B		C		D		E		F		G		H		J		K		L		M	
MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
14	15	2 3/4	3 1/4	4 13/16	5 3/4	1 1/16	1 3/8	5/8	15/16	7	8	.030	.040	.050	.060	1 5/16	1 7/16	.060	.078	3	3 3/4	15/16	1 1/8

FIG. 1. FOOD TURNER

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the current version before use.

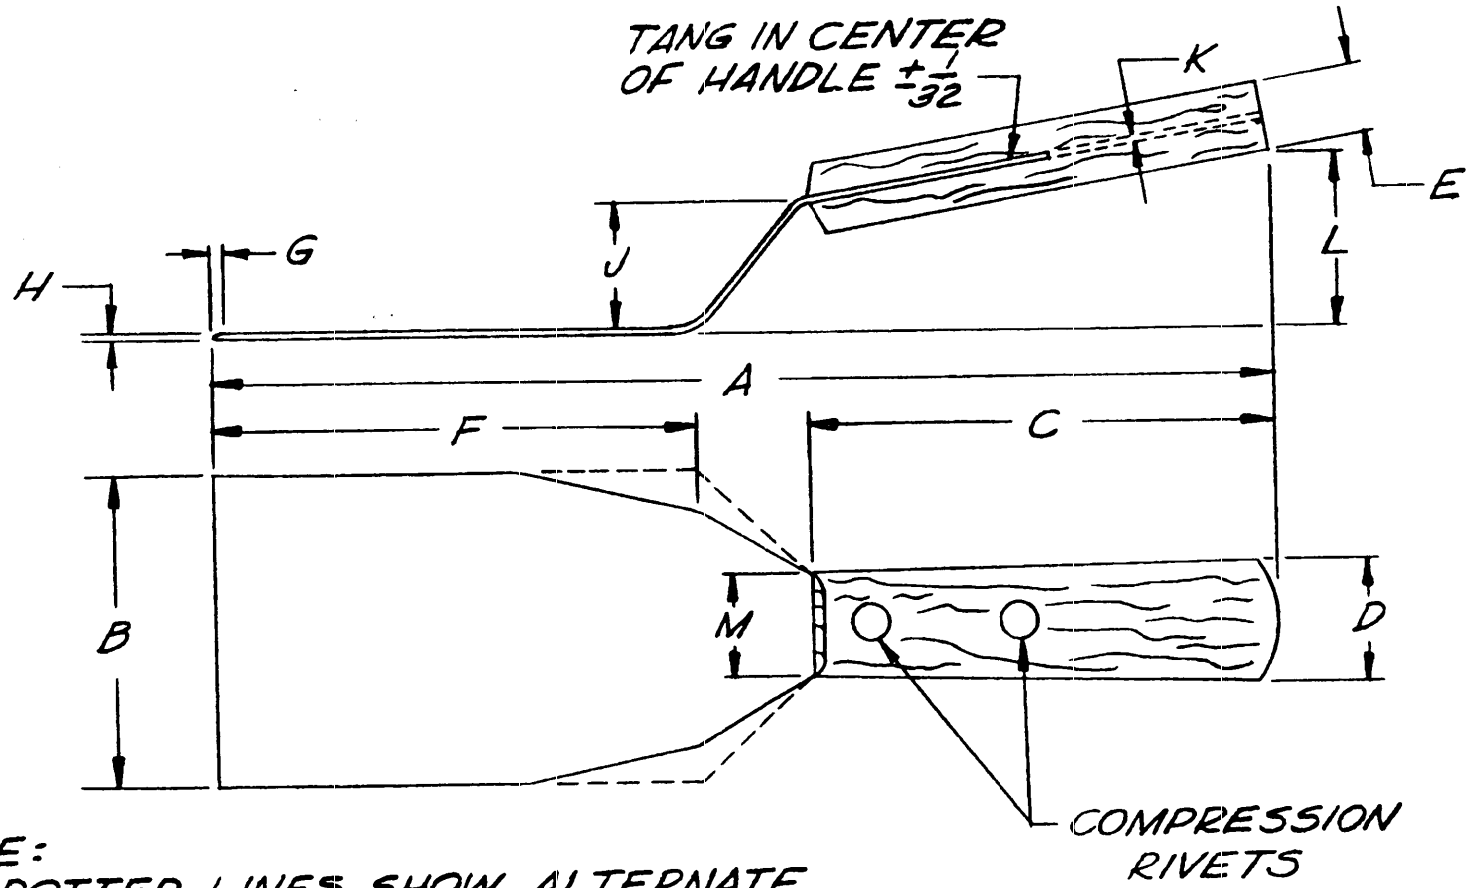


NOTE:
DOTTED LINES SHOW ALTERNATE METHOD OF CONSTRUCTION

DIMENSIONS IN INCHES																							
A		B		C		D		E		F		G		H		J		K		L		M	
MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
10	11	2 15/16	3 1/4	4 1/4	5	1 1/16	1 1/4	5/8	3/4	4 5/8	4 7/8	3/32	5/32	.060	.075	7/8	1 5/16	.060	.075	1 5/8	2 1/4	15/16	1 3/32

FIG. 2 FOOD TURNER, TYPE I, CLASS B

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:10Z
Check the source to verify that this is the current version before use.

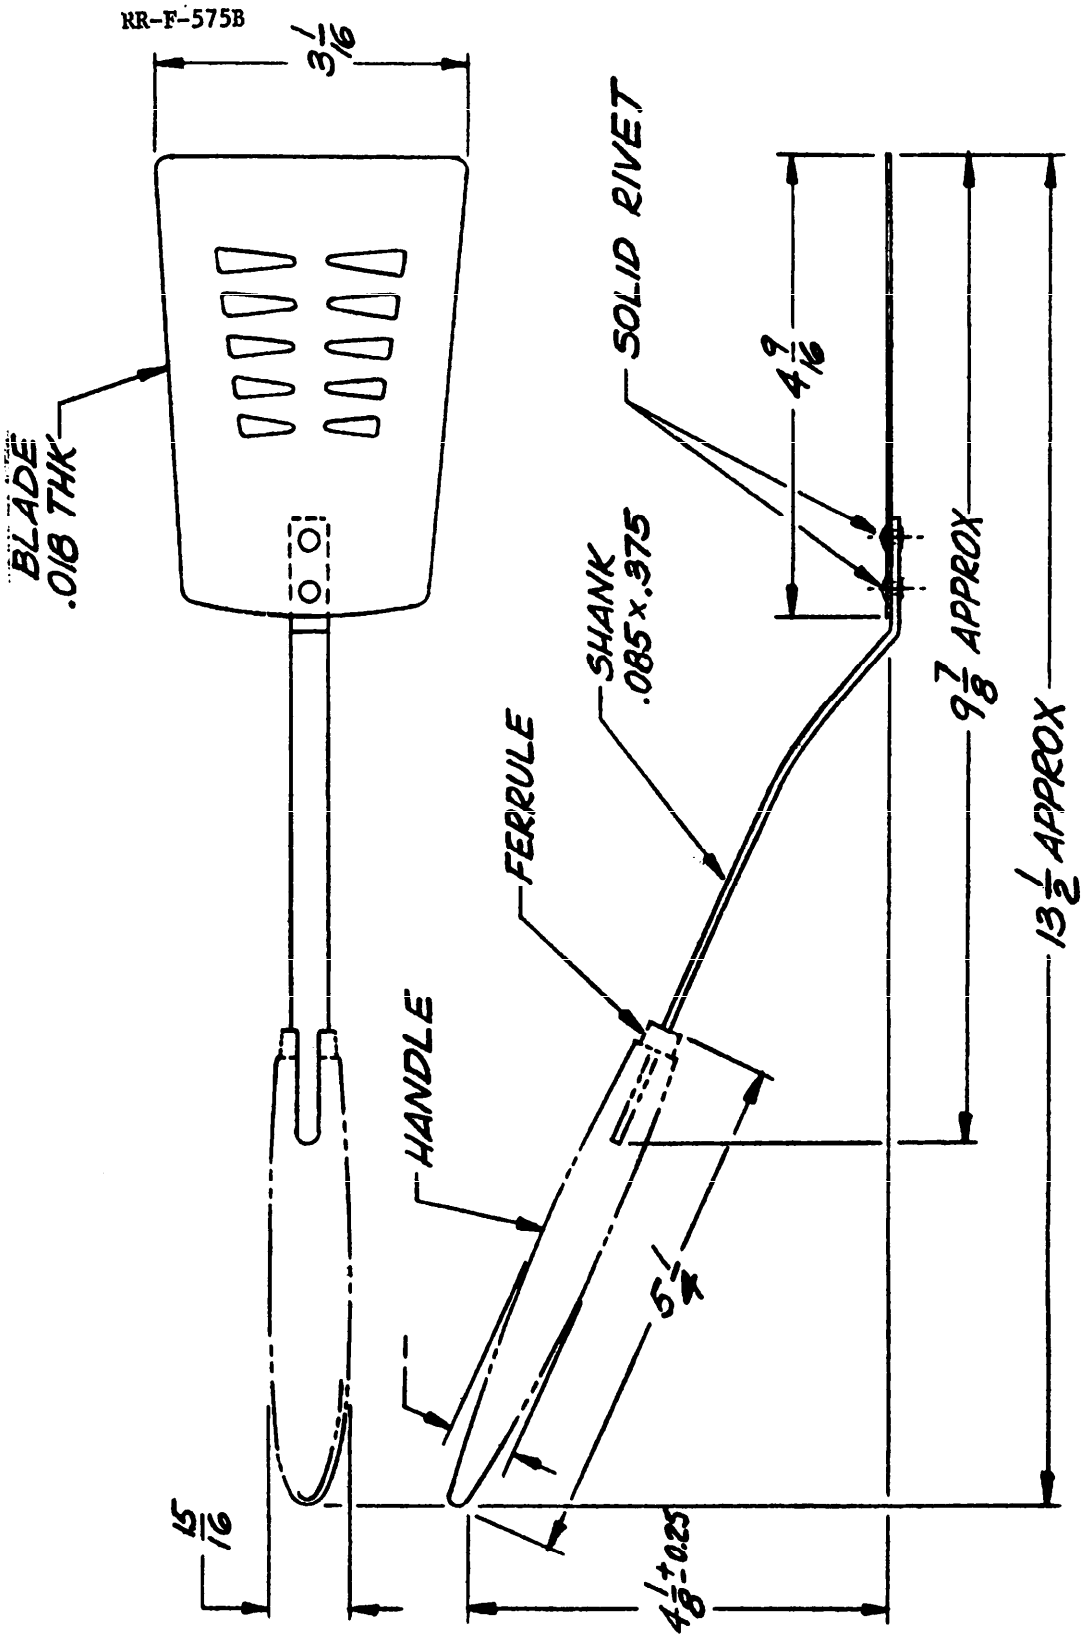

NOTE: UNLESS OTHERWISE SPECIFIED TOLERANCES ARE-FRACTIONS ± 1/16 -DECIMALS ± .005

FIG. 3 FOOD TURNER, TYPE II

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MC

User activity:

Navy - MS

Preparing activity:

Army - GL

CIVIL AGENCY INTEREST:

GSA-FSS
VA
HEW
JUS

Project No. 7330-0418

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION RR-F-575B Food Turners.

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the currentversion before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.