RR-F-800D
July 13, 1973
SUPERSEDING
Int. Fed. Spec. RR-F-00800C(GSA-FSS)
September 18, 1970

FEDERAL SPECIFICATION

FUNNEL, METAL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers metal funnels of the plain, shallow rim, deep rim, offset spout, and flexible-spout type.

1.2 Classification.

1.2.1 Types, classes, and styles. Metal funnels covered by this specification shall be of the following types, classes, and styles as specified (see 6.2).

Type I - Plain
Class A - For garage use
Style 1 - Without strainer

Class B - For general purpose use
Style 1 - Without strainer
Style 2 - With strainer

Class C - For hospital use
Style 1 - Without strainer

Class D - For home kitchen use
Style 1 - Without strainer

Type II - Shallow rim
Class B - For general purpose use
Style 1 - Without strainer

Type III - Deep rim
Class A - For garage use
Style 3 - With strainer

Type IV - Offset spout

Class A - For garage use
Style 2 - With strainer

Type V - Flexible spout
Class A - For garage use
Style 2 - With strainer

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

PPP-B-585 - Boxes; Wood, Wirebound.
PPP-B-591 - Boxes; Fiberboard, Wood-Cleated.
PPP-B-601 - Boxes; Wood, Cleated-Plywood.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

PPP-B-621 - Boxes; Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Shipping Fiberboard.

Federal Standards:

Fed. Std. No. 102 - Preservation, Packaging, And Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies.)

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from *Business Service Centers at the General Services Administration Regional Offices in Boston*, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from the established distribution points in their agencies.)

Military Specification:

MIL-L-10547 - Liners; Case, Waterproof.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)'

National Classification Board:

National Motor Freight Classification.

(Application for copies shall be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W. Washington, DC 20036.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are for the convenience of identification and are not intended to preclude the purchase of funnels otherwise conforming to the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.2 Material. Material shall be of the quality ordinarily used in commercial practice for the manufacture of high-quality funnels. The materials shall be free from defects which might affect their serviceability.

3.3 Identification marking. All funnels shall be marked in a plain manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily identified. Printed labels applied to the funnel will be acceptable.

3.4 Construction. The funnels covered by this specification shall consist essentially of a body and spout. The top edge of the funnels shall be strengthened by rolling, folding, rolling over wire, or any other suitable means provided the funnels meet the requirements of the top-edge test specified in 4.4.2.

3.5 Seams. Seams may be any suitable type provided they meet the requirements of the water-tightness test specified in 4.4.1, and provided the seams are as strong as the metal in the body of the funnel.

3.6 Welding, brazing, or soldering. Welding, brazing, or soldering shall be performed in accordance with the best commercial practice.

3.7 Air vent(s). When specified (see 6.2), air vent(s) shall be provided on the funnels of the following types and classes: Type I, classes A, B, and D; type II, class B; type III, class A; type IV, class A. The air vents shall consist of one or more grooves, flutes, beads corrugations, or similar means of allowing the air to escape from the container being filled.

3.8 Provision for hanging funnels. When specified (see 6.2), a suitable means for hanging the funnel shall be provided. Hinged wire loops, lugs or brackets with holes, or similar means for hanging the funnel are acceptable provided they are of approximately the same type of material as will be acceptable for hanging the funnels provided the capacity-test requirements of 4.4.1 can be met for: Type I, classes A, B, and D; type II, class B; type III, class A; type IV, class A; and type V, class A. The body or rim shall be provided with a bead around the edge of the hole for hanging.

3.9 Finish. All plated or coated surfaces except the flexible spout or type V funnels shall be applied after fabrication of the funnels. Plated or coated surfaces shall be free from unplated or uncoated spots, blisters, or other defects which might affect the serviceability of the funnels. Vitreous enamelware shall consist of a basic coat of cobalt-bearing vitreous enamel, and not less than two additional coats of white vitreous enamel. Entire surfaces (inner and outer) of enamelware shall be coated. All natural finished funnels shall be free from scratches, torn metal, or other defects which might affect their serviceability.

3.9.1 Galvanizing. Galvanizing shall be performed by the hot-dip process. The minimum thickness of the coating shall be 0.002 inch, except that the flexible spout of type V funnels shall be electro-deposited to 0.00010-inch-minimum thickness.

3.9.2 Copper plating. Copper plating shall be done by the electroplating process. The minimum thickness of the coating shall be 0.0005 inch.

3.10 Type I, plain funnels. Type I funnels shall be of plain design, shall be similar to figure 1, and shall conform to table I.

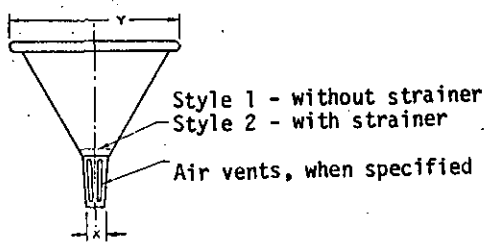


FIGURE 1. Type I, classes A, B, C, and D, style 1 and 2, plain funnels

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.10.1 Type I, class A funnels for garage use. Type I, class A funnels shall be of metal at least 0.020 inch thick. The metal and finish of the funnels shall be the following:

Steel, zinc-plated (galvanized).

3.10.1.1 Type I, class A, style 1, plain funnels for garage use. Type I, class A, style 1, funnels shall be furnished without strainers.

TABLE I. Type I, classes A, B, C, and D, styles 1 and 2, plain funnels

Nominal Capacity	"X" Inches	"Y" Inches	Class A	Class B	Class C	Class D
1/2 gill (2 oz.)	0.250 ±.063	2.500 ±.635	--- ---	--- ---	--- ---	* ---
1/2 pint (8 oz.)	0.312 ±.063	3.875 ±.625	---	---	*	---
1 pint (16 oz.)	0.437 ±.125	5.250 ±.750	---	*	*	*
1 quart	0.500 ±.125	7.000 ±.750	*	*	---	---
2 quart	0.625 ±.125	8.000 ±1.000	*	*	---	---
1 gallon	1.125 ±.250	9.000 ±1.000	--- ---	* ---	--- ---	--- ---
2 gallons	1.125 ±.250	12.000 ±1.000	--- ---	* ---	--- ---	--- ---

* Funnels covered by this specification.

3.10.2 Type I, class B, plain funnels for general purpose use. Type I, class B funnels shall be of metal at least 0.020 inch in thickness. The metal and finish of the funnels shall be one of the following as specified (see 6.2):

Steel, zinc-plated (galvanized).
Steel, copperplated.
Steel, tin-plated.
Iron, zinc-plated (galvanized).

3.10.2.1 Type I, class B, style 1, plain funnels for general purpose use. Type I, class B, style 1 funnels shall be furnished without strainers.

3.10.2.2 Type I, class B, style 2, plain funnels for general purpose use. Type I, class B, style 2 funnels shall be furnished with strainers. The strainer shall be either permanently attached or of the detachable type, as specified (see 6.2). The detachable strainer shall provide for easy removal, but it shall not loosen during normal use of the funnel. The fit between the strainer and the funnel shall be such as to prevent particles that are larger than the holes in the mesh from passing through the funnel. The strainer material shall be brass strainer cloth having 70 mesh per linear inch or 70 by 70 holes per square inch. 200 mesh per lineal inch or 200 by 200 holes per square inch will be acceptable for the 2 gallon size.

3.10.3 Type I, class C, plain funnels for hospital use. Type I, class C funnels shall be of metal at least 0.025 inch in thickness. The metal and finish of the funnels shall be either enameledware steel or corrosion resisting steel as specified (see 6.2). Funnels shall be smooth inside and outside to permit thorough cleaning. The funnel shall be provided with a handle similar in shape to a handle on a coffee cup. The handle shall be of such design as to permit easy cleaning of the funnel.

3.10.3.1 Type I, class C, style 1, plain funnels for hospital use. Type I, class C, style 1 funnels shall be furnished without strainers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.10.4.1 Type I, class D, style 1, plain funnels for home kitchen use. Type I, class D, style 1 funnels shall be furnished without strainers.

3.11 Type II, shallow-rim funnels. Type II shallow-rim funnels shall be similar to figure 2 and shall conform to table II.

3.11.1 Type II, class B, shallow-rim funnels for general purpose use. Type II, class B funnels shall be of steel at least 0.015 inch thick. The steel shall be tin plated.

3.11.2 Type II, class B, style 1 shallow-rim funnels for general purpose use. Type II, class B, style 1 funnels shall be furnished without strainers.

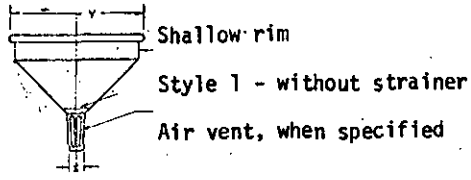


FIGURE 2. Type II, class B, style 1, shallow-rim funnels

TABLE II. Type II, class B, style 1, shallow rim funnel

Nominal Capacity	"X" Inches	"Y" Inches	Class B
1 pint (16 oz.)----------	0.437 ±.125	5.250 ±.750	*

* Funnel covered by this specification.

3.12 Type III, deep rim funnels. Type III, deep rim funnels shall be similar to figure 3 and conform to table III.

3.12.1 Type III, class A, deep rim funnels for garage use. Type III, class A funnels shall be of metal at least 0.020 inch thick. The metal and finish shall be aluminum, natural or polish finish.

3.12.2 Type III, class A, style 3, deep rim funnels for garage use. The 3 ounce size funnel shall be furnished with an all wool felt strainer assembly. The dimensions of the style 3 funnels shall conform to the requirements of table III and, in addition to conforming to table III, shall have an inside diameter capable of accepting the strainer assembly, by snug push fit, without deformation to either the strainer assembly or funnel bowl.

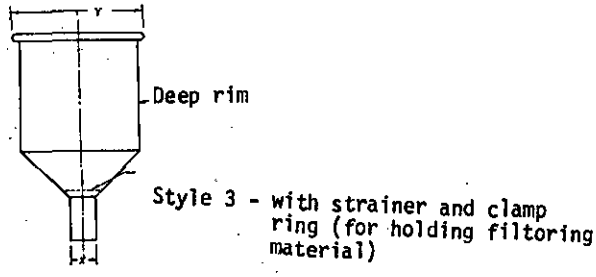


FIGURE 3. Type III, class A, style 3, deep-rim funnels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.12.2.1 Strainer assembly. The strainer assembly shall contain a wool felt strainer pad with a thickness of 0.040 inches minimum, 0.048 maximum. The outside diameter of the strainer assembly shall be such that it will fit snugly in the funnel wall, without deforming, resting on the top of the tapered portion of the funnel.

TABLE III. Type III, class A, style 3 deep rim funnels

Nominal Capacity	"X" Inches	"Y" Inches
3/4 gill (3 oz.)----------	0.355 max.	2.000 - 2.255

3.13 Type IV, offset spout. Type IV, offset spout funnels shall be similar to figure 4 and shall conform to table IV.

3.13.1 Type IV, class A offset spout funnels for garage use. Type IV, class A funnels for garage use shall be of metal at least 0.020 inch thick. The metal and finish of the funnels shall be steel, zinc-plated (galvanized).

3.13.1.1 Type IV, class A, style 2. Type IV, class A, style 2 funnels shall be furnished with a permanently attached strainer. The strainer material shall be brass strainer cloth. The brass strainer cloth shall be not less than 70 mesh (with 70x70 holes per square inch), nor more than 100 mesh (100x100 holes per square inch.) Intermediate meshes between 70 and 100 will be acceptable.

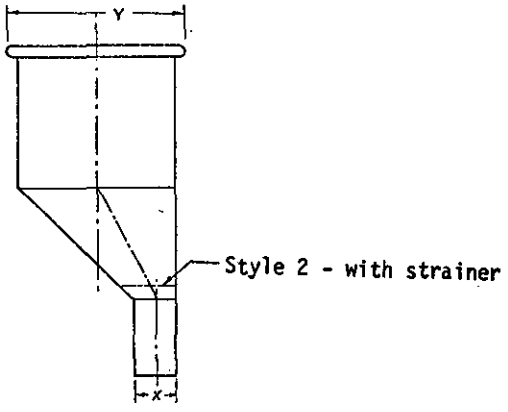


FIGURE 4. Type IV, class A, style 2, offset spout funnels.

TABLE IV. Type IV, class A, style 2, offset spout funnels

Nominal Capacity	"X" +.250	"Y" +1.000
Gallons	Inches	Inches
1----------	1.125	8.000

3.14 Type V, flexible spout. Type V, flexible spout funnels shall be similar to figure 5 and shall conform to table V. The flexible spout shall be flexible metal tubing capable of withstanding the water tightness test specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.1.4.1 Type V, class A flexible spout funnels for garage use. Type V, class A funnels for garage use shall be of metal at least 0.020 inch thick. The metal and finish of the funnels shall be steel, zinc-plated (galvanized).

3.14.1.1 Type V, class A, style 2. Type V, class A, style 2 funnels shall be furnished with a removeable strainer. The strainer material shall be brass strainer cloth. The brass strainer cloth shall be not less than 70 mesh (with 70x70 holes per square inch) nor more than 100 mesh (100x100 holes per square inch). Intermediate meshes between 70 and 100 will be acceptable.

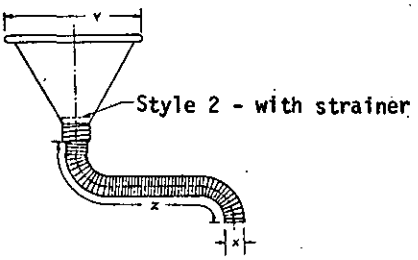


FIGURE 5. Type V, class A, style 2, flexible-spout funnels.

TABLE V. Type V, class A, style 2, flexible spout funnels

Nominal Capacity	"X"	"Y"	"Z"
	Inches	Inches	Inches
1 quart----------	1.000 ±.125	7.000 ±.750	8.000 ±1.000

3.15 Minimum capacity. The minimum capacity of types I through V funnels shall be the nominal capacity as shown in tables I through V minus 10 percent for funnels having a nominal capacity up to and including one pint, and minus 30 percent for funnels having a nominal capacity of one quart and larger.

3.16 Workmanship. Workmanship shall be of a good quality ordinarily used in commercial practice.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

4.2.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requriements of referenced subsidiary specifications and standards to the events specified or, if none, in accordance with this specification.

4.2.2 End item inspection.

4.2.2.1 Visual examination. Examination of the end item shall be in accordance with the classification of defects and acceptable quality levels (AQL's) set forth in table VI and 4.2.2.3. The lot size shall be expressed in units of funnels of each type, class and style for the purpose of determining the sample size in accordance with MIL-STD-105. A lot shall be all funnels of the same type, class and style offered for delivery at one time. The unit of product for this examination shall be one funnel of each type, class and style.

4.2.2.2 Dimensional examination. Inspection will be made of funnels to determine compliance with dimensions and capacity of funnels specified. Any dimensions or capacity not within the specified tolerances shall be classified as a defect.

4.2.2.3 Inspection levels and AQL's. The acceptable quality levels (AQL's), expressed in defects per 100 units, and inspection levels shall be as follows:

Examination	Inspection Level	AQL	
		Major	Minor
Visual	II	2.5	4.0
Dimensional	S-2	4.0	---
End Item Testing	S-2	4.0	---

4.2.2.4 Testing of the end item. Testing shall be performed on a sample end item in accordance with table VII. The inspection level shall be S-2 of MIL-STD-105. The acceptable quality level (AQL) shall be 4.0 defects per 100 units. All characteristics are applicable to individual unit requirements.

4.3 Examination of preparation for delivery. An examination will be made to insure that packaging, packing and marking as required by section 5 of this specification are complied with. Defects will be scored in accordance with table VIII. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 with an AQL of 4.0 defects per hundred units.

TABLE VI. Classification of defects

Examine	Defect	Major	Minor
Finish:			
(a) Coated or copper plating (when applicable).	Spot, blister, peeled, or chipped.....	X	
	Not adherent, flaking, incomplete coverage or bare spots.....	X	
	Not smooth, uniform, or is discolored...		X
	Dirt, grease, or other foreign matter embedded in finish.....		X
	Exposed base metal on inside or outside area of funnel.....	X	
(b) Natural or polished finish (copper or aluminum, as applicable).	Copper funnels not natural or polished..		X
	Aluminum funnels not bright or polished finish.....		X
	Scratches, or other defects affecting appearance.....		X
	Not smooth, uniform, or is discolored...		X
(c) Porcelain, enamelware (when applicable).	Ground coat visible through finish coat of inner and outer surfaces.....		X
	Color of vitreous enamel not white.....	X	
	Chip, star, or pin mark affecting appearance.....		X
	Blister, crack, crazing, burn off exposing bare metal, chipping, scaling or flaking.....	X	
	Fish scale; tearing, curling, or crawling of finish coat.....		X
	Exposed base metal on any surfaces.....	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of defects (con.)

Examine	Defect	Major	Minor
Construction and workmanship (general)	Not design specified.....	X	
	Sharp edge, burr, or projection which may cause injury.....	X	
	Any component omitted, or not as specified (when applicable).....	X	
	Strainer and clamping ring omitted (as required).....	X	
	Handle omitted or not attached as specified (if required).....	X	
	Provisions for hanging funnel omitted, or not as specified.....	X	
	Top edges not strengthened as specified	X	
	Kink, bend, wrinkles in metal affecting appearance.....		X
Clamp ring (as applicable).	Design, shape, or material not as specified.....	X	
	Does not hold filtering material securely in place.....	X	
Air vent (as applicable).	Omitted where specified.....	X	
	Design or material not as specified...		X
	Does not permit air to escape from container being filled.....	X	
Strainer (as specified).	Missing or material not as specified..	X	
	Not permanently attached (when applicable).....		X
	Detachable strainer not removable or is too loose.....		X
	Does not fit as specified.....		X
Welding, brazing or soldering	Missing or seams not closed with specified material.....	X	
	Burn through, fractured, cracked, incomplete or scale not removed.....	X	
	Undercut, weld flash, spatter, not smooth, buckled, or distortion at seam.....	X	
Identification marking	Missing, illegible, incomplete, or not as specified.....		X

TABLE VII.

Characteristic	Requirement paragraph	Test procedure
Capacity and watertightness.....	3.15	4.4.1
Top edge test.....	4.42 and table IX.	4.4.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.


TABLE VIII. Classification of defects

Examine	Defects
Marking (exterior and interior container).	Incorrect; illegible; of improper size, location, sequence, or method of application, or omitted.
Materials.	Any non-conforming component; component missing, damaged, or otherwise defective affecting serviceability.
Workmanship.	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling; bulging or distortion of containers.
Contents (exterior and interior container).	Number per container is more or less than required.
Weight (exterior and interior container).	Gross/net weight exceeds requirements.
Preservation.	Preservation improperly applied or missing; strapping, sealing, and cushioning inadequate, improper, or missing; closures improperly affixed, components improperly secured.

4.4 Tests.

4.4.1 Capacity and watertightness test. The funnels shall be tested for minimum capacity by covering the end of the spout and pouring the "minimum capacity" amount of water into the funnel as specified in 3.15. The water shall not leak through any part or connection of the funnel as specified in 3.5.

4.4.2 Top-edge test. The top edge of the funnel should be load-tested in the following manner. Place the funnel on a platform scale and apply (by hand) a load according to class as shown in table IX and figure 7. The funnel shall not take a permanent set, crack in the seams, nor show any other defect, including leakage, which might affect the serviceability of the funnel.



NOTE: If funnels are seamed, place seam at approximately 90 degrees from the loaded position when testing.

FIGURE 7. Top-edge test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

TABLE IX. Top edge test

Class	Applied load Pounds
A	30
B	25
C	20
D	15

5. PREPARATION FOR DELIVERY

5.1 Packaging. *Packing shall be level A, B, or C as specified (see 6.2).*

5.1.1 Level A.

5.1.1.1 Funnels. Funnels, types I and II, classes A, B, C, and D, style 1; type III, class A, style 3; and type IV, class A, style 2 shall be nested and packaged 5 of the same type, class, style, and size in a box conforming to PPP-B-636, class domestic. Funnels, type I, class B, style 2 shall be packaged without nesting, five in a box conforming to PPP-B-636, class domestic. Shredded news print or shredded paper may be used as a cushioning material to prevent movement of funnels, or their parts within the package. Two type V funnels shall be alternated funnel to flexible spout and unit packaged in a box conforming to PPP-B-636, class domestic. The boxes shall be closed in accordance with the appendix of PPP-B-636. All class C and D funnels shall be individually wrapped with white tissue prior to packaging.

5.1.1.2 Strainers. Prior to closure of the packages, detachable strainers (one for each funnel in the respective package) shall be wrapped together in kraft paper and placed in the end nested funnel or the top of the uppermost non-nested funnel and cushioned with shredded wax paper as specified in 5.1.1.1, to prevent movement while in transit.

5.1.2 Level B. Funnels and strainers shall be packaged as specified in 5.1.1.

5.1.3 Level C. Funnels and strainers shall be packaged in accordance with the supplier's commercial practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Funnels of one type, class, style, and size only, packaged as specified in 5.1, shall be packed on end in quantities as specified in table X, in a box conforming to PPP-B-585, class 3, type 2 load; PPP-B-591, class II; PPP-B-601, overseas type, style 2 or 4; or PPP-B-621, class 2. Each shipping container shall be provided with a sealed case liner conforming to MIL-L-10547, type I or II, grade B or C, class 2. Each shipping container shall be closed and strapped in accordance with the appendix of the applicable container specification.

5.2.2 Level B. *Funnels shall be packed as specified in* 5.2.1 except the boxes shall be domestic grade and PPP-B-636, class domestic may be used.

5.2.3 Level C. Funnels, packaged as specified in 5.1, shall be packed in containers to assure carrier acceptance and safe delivery at destination in compliance with National Motor Freight classification or Uniform Freight Classification.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129 or Fed. Std. No. 123, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

TABLE X. Units per package and container

Capacity	Funnels per intermediate package	Intermediate packages per shipping container	Total quantity funnels per shipping container
1/2 gill (2 oz.) (type I)	5	20	100
3/4 gill (3 oz.) (type III)	5	20	100
1/2 pint (8 oz.) (type I)	5	20	100
1 pint (16 oz.) (type I, II)	5	20	100
1 quart (32 oz.) (type I)	5	20	100
1 quart (type V)	2	50	100
2 quart (types I)	5	12	60
1 gallon (types I, and IV)	5	9	45
2 gallon (type I)	5	4	20

6. NOTES

6.1 Intended use. The funnels covered by this specification are intended to be used for pouring or straining liquids in garages, hospitals, homes, warehouses, and other establishments.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and style of funnel required (see 1.2.1).
(c) Capacity of funnels required (see table I through V).
(d) Air vents, if required (see 3.7).
(e) Means of hanging funnel, if required (see 3.8).
(f) Metal and finish required for funnels (see 3.10.2 and 3.10.3).
(g) Attached or detachable strainers, when ordering type I, class B, style 2 funnels (see 3.10.2.2).
(h) Applicable levels of packaging and packing required (see 5.1 and 5.2).

Preparing activity:

GSA-FSS

Civil Agency Coordinating Activities:

USDA-AFS

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

RR-F-800D
NOTICE-1
January 4, 1974

FEDERAL SPECIFICATION

FUNNEL, METAL

This notice was approved by the Commissioner, Federal Supply Service, General Services Administration.

One page 1, in the upper right corner, immediately below "SUPERSEDING", delete "Int. Fed. Spec. RR-F-00800C (GSA-FSS) September 18, 1970" and substitute the following:

Int. Fed. Spec. RR-F-00800C (GSA-FSS)
September 18, 1970 and
Fed. Spec. RR-F-800B
December 3, 1962

U. S. GOVERNMENT PRINTING OFFICE : 1974 O - 546-581/2495

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.