INTERIM FEDERAL SPECIFICATION

HOLDER, CARD-LABEL AND INSERT

(NEW AND REFURBISHED OFFICE BUILDING IDENTIFICATION)

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers "C" shaped aluminum extrusions and plastic inserts to be used for room number, room number and use, and occupant identification in new and refurbished office buildings.

1.2 Classification.

1.2.1 Styles and sizes. Extrusions and plastic inserts shall be of the following styles and sizes, as specified (see 6.2).

Style I Extrusion - Silver anodized finished.

Size 1 - 1 x 3 inches.
Size 3 - 1 x 8 inches.

Style I Insert - White w/black core.

Size 1 - 1 x 3 x 1/16 inches.
Size 2 - 1 x 5 x 1/16 inches.
Size 3 - 1 x 8 x 1/16 inches.

Style II Extrusion - Gold anodized finished.

Size 1 - 1 x 3 inches.
Size 3 - 1 x 8 inches.

Style II Insert - Walnut grain w/white core.

Size 1 - 1 x 3 x 1/16 inches.
Size 2 - 1 x 5 x 1/16 inches.
Size 3 - 1 x 8 x 1/16 inches.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposal, form part of this specification to the extent specified herein:

Federal Specifications:

L-P-387 - Plastic Sheet, Laminated, Thermosetting (For Designation Plates).
PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Box, Fiberboard.
PPP-B-665 - Boxes, Paperboard, Metal Stayed (Including Stay Material).
PPP-B-676 - Boxes, Set-Up.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 595 - Colors.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12
Check the source to verify that this is the current version before use.

National Classification Board:

National Motor Freight Classification.

(Application for copies shall be addressed to the National Classification Board, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies shall be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

(Activities outside the Federal Government may obtain copies of Federal Specification, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), before production is commenced, the supplier shall submit a preproduction sample to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.2 Standard product. The extrusions and plastic inserts delivered under this specification shall be the manufacturer's current commercial product which meets the requirements of this specification.

3.3 Materials. Materials not definitely specified shall be of a quality normally used for the purpose in the best commercial practice.

3.3.1 Aluminum. Aluminum used for the extrusions shall be suitably tempered 6000 series alloy.

3.3.2 Plastic (insert). Plastic shall be opaque, laminated type NDP material as specified in L-P-387 (see 3.4.2.1 and 3.4.2.2).

3.4 Construction.

3.4.1 Extrusions. Extrusions shall be anodizing grade, C shape, extruded from the aluminum specified in 3.3.1. The extrusions shall meet the dimensional requirements specified in figure 1 and table I. They shall be free from defects that affect their appearance, durability, and serviceability. At the option of the contractor, the extrusion shall either be cut to the sizes specified in table I (see 6.2) before or after the anodic coating, dye coating, and sealing process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

The cut ends shall be square, free of tool marks, burrs, and all the outer edges and corners shall have 0.015 inch radius maximum. The cut pieces shall be tested for flatness and straightness as specified in 4.4.2.1 and any bow, warp and twist greater than 0.005 inch affecting either width or length shall constitute a defect.

TABLE I. Extrusion lengths (finished)

Style	Size	Length (inches)	Tolerance (inches)
I (Silver)	1	3	+ .015 - .000
I (Silver)	3	8	+ .015 - .000
II (Gold)	1	3	+ .015 - .000
II (Gold)	3	8	+ .015 - .000

3.4.1.1 Coating preparation. The extrusions shall be cleaned free of all foreign substances, oxides, soils, and interfering films in accordance with the manufacturer's standard cleaning procedures. After cleaning they shall have chemically clean and water break free surfaces. Prior to anodic coating the extrusions shall be chemically or electro-chemically brightened to produce suitable bright surfaces for the subsequent anodic and color coats. After brightening the surfaces shall be treated in a suitable bath to remove any characteristic surface smut and other matter that would adversely affect the subsequent coatings.

3.4.1.2 Anodic coating. The extrusions shall be treated electrolytically in a bath containing either chromic or sulphuric acid to produce a uniform anodic coating on the surfaces. The applied anodic coating shall be continuous, smooth, adherent, uniform in appearance, and free of surface blemishes and powdery areas.

3.4.1.3 Color coating. The extrusions prior to the sealing process shall be dyed a gold or silver color as specified (see 6.2) with a suitable coloring material. The color material used shall not be damaging to the anodic coating. The color of the extrusions shall match the applicable color standard furnished by the Contracting Officer, when compared visually with each other (see 6.3). NOTE: A shade variation not readily discernible from a distance of 20 feet by a person with normal or corrected 20-20 vision is permissable.

3 4.2 Insert (plastic) The insert shall be made from the material specified in 3.3.2. The sizes specified (see 6.2) by the procuring activity shall meet the dimensional requirements specified in table II and shall be flat, straight and polished; any bow, warp or twist greater than 0.005 inch affecting either width or length shall constitute a defect when tested as specified in 4.4.2.2. End edges of the plastic inserts shall have a 45 $\pm$ 10° chamfer 0.030 inch wide maximum.

3.4.2.1 Style I, sizes 1, 2, and 3. Style I, sizes 1, 2, and 3 shall have a black center core laminated on both sides with a white outer sheet. The white of the outer sheet shall match standard color chip 27875 of Federal Standard No. 595.

3.4.2.2 Style II, sizes 1, 2, and 3. Style II, sizes 1, 2, and 3 shall have white center core laminated on both sides with a polished dark walnut grain outer sheet. The color and graining of the walnut grain outer sheet shall visually match the standard color sample furnished by the contracting officer, when compared visually with each other (see 6.3). The inserts when cut to size shall be cut so that the grain of the walnut finish is parallel with the length of the insert. A shade variation not readily discernible from a distance of 20 feet by a person with normal or corrected 20-20 vision is permissable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

TABLE II. Insert dimensions (finished)

Style	Size	Length	Tolerance	Width 1/	Tolerance	Thickness	Tolerance
I	1	3 inches	± 0.010	1 inch	+ 0.000 - 0.005	0.0625 inch	+ 0.005 - 0.005
I	2	5 inches	± 0.010	1 inch	+ 0.000 - 0.005	0.0625 inch	+ 0.005 - 0.005
I	3	8 inches	± 0.010	1 inch	+ 0.000 - 0.005	0.0625 inch	+ 0.005 - 0.005
II	1	3 inches	± 0.010	1 inch	+ 0.000 - 0.005	0.0625 inch	+ 0.005 - 0.005
II	2	5 inches	± 0.010	1 inch	+ 0.000 - 0.005	0.0625 inch	+ 0.005 - 0.005
II	3	8 inches	± 0.010	1 inch	+ 0.000 - 0.005	0.0625 inch	+ 0.005 - 0.005

1/ Width shall be parallel along entire length within 0.005 inch.

3.5 Workmanship. All extrusions and inserts shall be free of nicked, rough, or sharp edges. The anodic and dye coating or the extrusions shall be continuous, smooth, uniform in appearance and shall be free from powdery areas, loose films, discontinuities such as breaks and scratches, or other damage. The inserts shall be free from blisters, cracks, scratches, dents, etc., and the edges shall be smooth and present a neat appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required it shall be examined for the defects in table III, specified dimensions, and tested as specified in 4.4.1.

4.3 Inspection. Sampling for inspection shall be made in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End item inspection. The lot shall consist of all extrusions or inserts of one style and size offered for inspection at one time. The sample unit shall be one completely fabricated extrusions or insert.

4.3.2.1 Visual examination. Examination shall be made of the end item for the defects in table III. The inspection level shall be level II with an AQL of 4.0 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

TABLE III. Visual examination

Examine	Defect
Finish	Color of extrusions or inserts not as specified. Color of extrusions or inserts are not visually compatible with the applicable color sample.
Construction and Workmanship	
Extrusions	Dye coating not continuous, smooth, uniform in appearance; not free from powdery areas, stains, discontinuities such as surface breaks and scratches, or nicked, rough, or sharp edges.
Inserts	Edges not smooth and do not present a neat appearance. Surfaces not free from blisters, cracks, scratches, dents, etc. Core material not free of voids and breakouts along edges. Walnut grain not parallel with length.

4.3.2.2 Dimensional examination. Inspection shall be made of the end item for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

4.3.2.3 Testing of the end item. The end item shall be tested as specified in 4.4.1 and 4.4.2. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging and packing, are in accordance with section 5 of this specification. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for delivery at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units. Defects shall be scored as specified in table IV.

TABLE IV. Examination of preparation for delivery

Examination	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Contents	Number per container is more or less than specified.

4.3.3.1 Examination of shipping container. When shipping containers are required to be in accordance with PPP-B-636 examination for defects in closure shall be in accordance with the appendix of that specification.

4.4 Tests.

4.4.1 Dimensions.

4.4.1.1 Extrusions. The extrusions shall be tested for the dimensions specified in figure 1 and table I for compliance with 3.4.1. The dimensions shall be measured with suitable inspection gauges and measuring instruments. The failure to meet one or more dimensional requirements shall constitute a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12:25
Check the source to verify that this is the current version before use.

4.4.1.2 Inserts. The inserts shall be tested for the dimensions specified in table II for compliance with 3.4.2.1 and 3.4.2.2. The dimensions shall be measured with suitable inspection measuring instruments. The failure to meet one or more dimensional requirement shall constitute a defect.

4.4.2 Flatness and straightness. The extrusions and inserts shall be tested for flatness and straightness as specified in 4.4.2.1 and 4.4.2.2. For the purpose of these tests flatness means any bow (concave or convex), warp, or twist, or combination that affects the width. Straightness means any bow (concave or convex), warp, or twist, or combination that affects the length.

4.4.2.1 Extrusions. Extrusions which meet the requirements of 4.4.1.1 shall be tested for flatness and straightness for compliance with 3.4.1. The flat surface of the extrusion shall be placed on a surface plate and tested for evidence of bow, warp, or twist. Bow, warp, or twist shall be checked with a suitably mounted dial gauge having an accuracy of 0.001 inches or better or other equally accurate inspection instrument.

4.4.2.2 Inserts. Inserts which meet the requirements of 4.4.1.2 shall be tested for flatness and straightness for compliance with 3.4.2.2. Either of the inserts flat surface shall be placed on a surface plate and tested for bow, warp, or twist. Bow, warp, or twist shall be checked with a suitably mounted dial gauge having an accuracy of 0.001 inches or better or other equally accurate inspection instrument.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. Twelve holders and inserts, of one description, shall be packaged in a close-fitting box conforming to PPP-B-566, PPP-B-665, or PPP-B-676, type style and grade optional.

5.1.1.1 Intermediate packaging. Twelve boxes (144 holders and inserts), shall be intermediate packaged in a close-fitting box conforming to PPP-B-636, class weather resistant. The box shall be waterproofed in accordance with the appendix to the box specification.

5.1.2 Level B. The holders and inserts shall be packaged as specified in 5.1.1.

5.1.2.1 Intermediate packaging. Twelve boxes of holders and inserts, shall be intermediate packaged as specified in 5.1.1.1, except that the box shall be class domestic and waterproofing will not be required.

5.1.3 Level C. The holders shall be packaged in accordance with the suppliers commercial practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. The holders and inserts, packaged as specified in 5.1.1.1, shall be packed in a close-fitting box conforming to PPP-B-636, class weather resistant. The box shall be waterproofed in accordance with the appendix to the box specification.

5.2.2 Level B. Twelve intermediate packages of holders and inserts shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. Closure shall be in accordance with the appendix to the box specification.

5.2.3 Level C. The holders and inserts, packaged as specified in 5.1, shall be packed to insure carrier acceptance and safe delivery at destination at lowest rates, in containers complying with the Uniform Freight Classification Rules or National Freight Classification Rules, as applicable.

5.3 Marking. In addition to markings required by the contract or order, the interior and shipping containers shall be marked in accordance with Fed. Std. No. 123 or MIL-STD-129.

6. NOTES

6.1 Intended use. The extrusions and inserts covered by this specification are for identifying the room number, room number and use, and occupant identification in new and refurbished office buildings, managed by General Services Administration, Public Buildings Service.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

6.1.1 Style I extrusions (silver anodized) and Style I inserts (white w/black core) are for use in all office buildings, except as noted in 6.1.2.


6.1.2 Style II extrusions (gold anodized) and Style II inserts (walnut grain w/white core) are for use in court spaces and other specially furnished areas.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:


(a) Title, number, and date of this specification.
(b) Type and size of extrusion and insert required (see 1.2.1).
(c) Preproduction sample - when a preproduction sample is required (see 3.1).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Standard color sample. Information pertaining to the standard color samples may be obtained from the office issuing the solicitation for offers.

FRONT VIEW

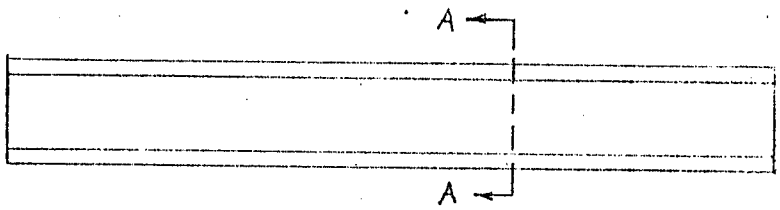

DIMENSIONS AS SHOWN IN TABLE I

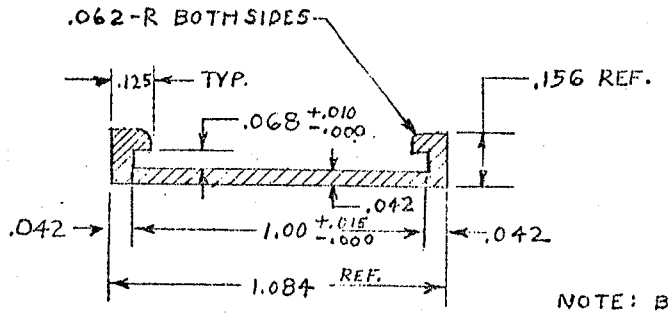

VIEW A-A - EXPANDED

NOTE: BREAK OUTSIDE CORNERS .015 MAX. ALL INCH DIM.

TOLERANCE EXCEPT AS NOTED	
.000 TO .125 = ± .007	.501 TO 1.000 = ± .015
.125 TO .500 = ± .010	1.001 TO 2.000 = ± .0175

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, fold, staple, and mail.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

RR-H-001417(GSA-FSS) Holder, Card-Label-and Insert (New and Refurbished Office Building Identification)

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*


11. NAME AND TITLE OF SUBMITTER	12. DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

FOLD

GENERAL SERVICES ADMINISTRATION

OFFICIAL BUSINESS



POSTAGE & FEES PAID
GENERAL SERVICES ADMINISTRATION

General Services Administration
Federal Supply Service (FMSD)
Washington, D.C. 20406

FOLD

GSA FORM FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.