RR-M-1075A
November 16, 1972
SUPERSEDING
Fed. Spec. RR-M-1075 (See 6.3)
March 18, 1966

FEDERAL SPECIFICATION

MOPPING OUTFITS, FLOOR

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers floor mopping outfits consisting of various combinations of wringers and buckets.

1.2 Classification.

1.2.1 Types, classes, and sets. Mopping outfits covered by this specification shall be of the following types, classes, and sets, as specified (see 6.2). Sizes of wringers and buckets contained in sets are expressed as minimum capacities or dimensions, as applicable.

Type I - Pressure-plate squeeze-type mopping outfits.
Class 1 - Horizontal pressure.
Set A - Size 1 wringer (7-1/2" x 6" x 5") and size 1 bucket (16-quart) with casters.
Set B - Size 2 wringer (7" x 7-1/2" x 5-3/4") and size 3 bucket (26-quart) with casters.
Set C - Size 3 wringer (7-1/2" x 8" x 6-1/2") and size 4 bucket (35-quart) with casters.

Class 2 - Combination horizontal and downward pressure.
Set B - Size 2 wringer (7" x 7-1/2" x 5-3/4") and size 3 bucket (26-quart) with casters.
Set C - Size 4 wringer (8-1/2" x 9" x 6-3/4") and size 4 bucket (35-quart) with casters.

Type II - Gear and rack mopping outfits.
Set A - Size 1 wringer (7-1/8" x 3-1/2" x 4-5/8") and size 1 bucket (16-quart) with casters.
Set B - Size 2 wringer (7-7/8" x 5-3/8" x 5") and size 3 bucket (26-quart) with casters.
Set C - Size 3 wringer (8-7/8" x 5-1/4" x 6-1/8") and size 4 bucket (35-quart) with casters.
Set CC - Size 3 wringer (8-7/8" x 5-1/4" x 6-1/8") and two size 4 buckets (35-quarts each) with silencers, mounted on truck.

Type III - Roller-type mopping outfits.
Class 1 - Bucket and wringer integral (without casters).
Set A - Wringer and size 0 bucket (14-quart).
Set B - Wringer and size 1 bucket (16-quart).

Class 2 - Wringer and slotted framework (with casters).
Set C - Wringer and size 2 bucket (20-quart).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards of the issues in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

T-M-561 - Mop, Wet, Cotton.
RR-B-800 - Bucket, Mop, Metal.
RR-P-35 - Pails, Utility, Metal (Zinc Coated).
RR-W-670 - Wringer, Mop.
PPP-B-636 - Box, Fiberboard.
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple Wall.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil agencies).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:11Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, Government Printing Office, Washington, DC.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers or the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-123 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specification procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM) Standards:

D 2240-68 - Identification Hardness of Rubber and Plastics.

(Applications for copies should be addressed to the American Society for testing and materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

Commercial Standards:

CS 35-61 - Hardwood Plywood.

(Copies of Commercial Standards, which are Department of Commerce publications, may be obtained upon application accompanied by money order, coupon, or cash to the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.)

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Bid sample. When specified, bid samples of mopping outfits of each type, class, and set required (see 1.2.1) shall be submitted for examination and testing. The bid sample shall be representative of the wringer outfit the supplier proposes to furnish (see 4.2).

3.2 Components of outfits.

3.2.1 Type I - Pressure-plate-squeeze mopping outfits. Each class 1 - horizontal-pressure or class 2 - combination horizontal-and downward-pressure outfit, as specified (see 1.2.1), shall consist of a wringer and a single bucket. The class 1 outfit shall be similar to figure 1, and the class 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

outfit shall be similar to figure 2. Wringers shall conform to type I, class 1 or 2, as specified, of RR-W-670. Buckets shall conform to class 2 (without spider chassis and casters), shape A (oval with tapering sides) in RR-B-800.

3.2.2 Type II - Gear and rack mopping outfits. Each outfit as specified (see 1.2.1), shall consist of one wringer and a single bucket with casters (see figure 3), with the exception of set CC which shall consist of a truck, two buckets, and a wringer (see figure 4). Wringers shall conform to type II in RR-W-670. Single buckets shall conform to class 1 (with spider chassis and nonmarking casters), shape A (oval with tapering sides), of RR-B-800. The truck and two buckets (set CC) shall conform to type II, class 3 (with silencers on bucket and truck), shape A (oval with tapering sides) in RR-B-800.

3.2.3 Type III - Roller-type wringer mopping outfits.

3.2.3.1 Class 1 - Roller-type wringer mounted on bucket without casters. Each outfit, as specified (see 1.2.1), shall consist of a roller-type wringer securely attached to a single bucket. The outfit shall be similar to figure 5. Wringers shall be as specified herein. Buckets in set A outfits shall be in conformance with the requirements for 14-quart buckets in RR-P-35. Buckets in set B outfits shall be in conformance with the requirements for 16-quart buckets, shape D in RR-B-800. Buckets in set C outfits shall be in conformance with the requirements for 20-quart buckets (size 2), shape D (round with tapering sides), in RR-B-800.

3.2.3.2 Class 2 - Roller-type wringer mounted on slotted framework with casters. Each outfit, as specified (see 1.2.1) shall consist of a roller wringer mounted on a slotted framework with casters and a single bucket. The outfit shall be similar to figure 6. The wringer and framework shall be as specified herein. The bucket shall be size 2 (20 quart), class 2 (without spider chassis and casters), shape D (round with tapering sides) in RR-B-800.

3.3 Materials in type III roller-type wringer outfits.

3.3.1 Corrosion resisting metal. Material designated herein as corrosion resisting metal shall be steel or malleable iron electrogalvanized, electroplated, or finished with a baked-on or air-dried enamel coating.

3.3.2 Wood. Wood for rollers shall be maple, ash, cherry, birch, pecan, hackberry, or other medium or high-density hardwood, as classified in Commercial Standard CS-35-61.

3.3.3 Rubber. Rubber for rollers shall be natural rubber, synthetic rubber, or a combination of natural and synthetic rubber.

3.4 Construction of type III roller wringers.

3.4.1 Class 1 - Integral roller-type wringer and bucket. The specified roller wringer shall be securely attached to the specified bucket (see 1.2.1) by means of a rounded edge steel bracket as shown in figure 1. The thickness of the metal in the bucket shall be not less than U. S. Steel Gage No. 14 (0.075 inch minimum thickness). The corrosion resisting metal framework shall be not less than 0.1875 inch thick. The rollers shall be centered on their bearings and shall be positioned so that they will not reduce the capacity of the bucket and so that water wrung from mops will drain into the bucket. The rollers shall be made of corrosion resisting metal (3.3.1), wood (3.3.2), or rubber (3.3.3) at the option of the manufacturer. The length of the rollers shall be not less than 11 inches and the diameter not less than 1-7/8 inch. The diameter shall be uniform and surfaces smooth so that the rollers will come together evenly over the entire length. The bucket and framework shall rest evenly on a level surface and the weight shall be distributed so that the outfit will not tip over when in use or when not in use. The foot lever which is part of the framework, shall be constructed so that application of pressure to the lever will cause the rollers to come together to squeeze the mop, and release of pressure will cause them to return automatically to their original open position permitting easy removal of the mop. Wringers shall be equipped with a mop guard to prevent loose ends of mop strands from entwining around roller shafts, axles, or other components.

3.4.1.1 Unless otherwise specified, crank-handle and pull-through designs are equally acceptable.

3.4.2 Class 2 - Roller wringer with slotted framework and casters. The wringer rollers shall be mounted on corrosion resisting metal framework (see 3.3.1) constructed to hold a single bucket of specified size (see figure 6). The rollers shall be located so that water wrung from mops will drain into the bucket. The framework shall be equipped with four nonmarking rubber-tired casters. The two rear casters shall be of the nonswiveling type and shall be at least 2 inches in diameter. The two front casters shall be of the swiveling type and shall be at least 1-5/8 inches in diameter. The rollers shall be made of corrosion resisting metal (see 3.3.2) and shall be not less than 11 inches

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:11Z
Check the source to verify that this is the current version before use.

long and not less than 1-7/8 inches in diameter. The diameter of the rollers shall be uniform and surfaces smooth so that they will come together evenly over the entire length. To minimize wear the roller shafts shall operate on bearing surfaces provided by bushings. Wringers shall be designed with means for guarding the mop so that strands will not catch in or entwine around roller shafts, axles, or other components. The rear roller shall be supported by adjustable arms arising from the treadle and guided through slots in the framework so that when pressure is applied to the foot pedal the rollers will come together to squeeze the mop and when pressure is released rollers will automatically return to their original open position permitting easy removal of the mop. A corrosion resisting metal bail shall be conveniently located so that the outfit can be lifted and carried. The wringer shall be crank handle operated.

3.4.2.1 Unless otherwise specified, one roller shall be corrugated or perforated.

3.5 Resistance of type III outfits to deformation. When tested under a load of 250 ± 5 pounds as specified in 4.4.2.1, wringer components shall not separate, loosen, break, or permanently deform in any way that will impair their serviceability or durability.

3.6 Caster test for type III, class 2 mopping outfits. When tested as specified in 4.4.2.2, the bucket, chassis, and casters of roller type outfits shall show no readily apparent visual signs of permanent deformation, tire marks, lack of swiveling ability, or other defects that will impair the serviceability of the outfit.

3.7 Marking. At least one of the components of each outfit shall be marked with the name of the manufacturer or trademark easily identifiable with the manufacturer.

3.8 Workmanship. Wringer outfits shall be free from dirt, from sharp edges that might snag mop yarns or injure the operator, and from other defects that might affect serviceability or durability. Normal factory lubrication of gears, bushings, and other points of friction shall not be considered as dirt. When rivets are used they shall be neatly set or welded. All welds shall be complete and smooth, with no evidence of burned through areas, porosity, cracks, or molten metal spatter.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the examination and testing set forth in the specification where such are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Bid samples. Bid samples submitted in accordance with 3.1 shall be examined for visual defects in table I and for dimensional defects as specified in table II and shall be tested by the applicable procedures specified in 4.4.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Inspection of components and materials. In accordance with 4.1, the supplier is responsible for insuring that components and materials used were manufactured, examined, and tested in accordance with the specified requirements of referenced subsidiary specifications and standards or, if none, in accordance with this specification.

4.3.2 End item examination and testing.

4.3.2.1 Lot. For the purpose of examination and testing of mopping outfits, a lot shall consist of all outfits of one type, class, and set, as applicable (see 1.2.1) offered for delivery at one time.

4.3.2.2 Visual examination. Mopping outfits shall be examined for visual defects in accordance with table I. The inspection level shall be II and the acceptable quality level (AQL) 4.0 defects per 100 units. The sample unit shall be one complete outfit. If the number of defects in the sample exceeds the acceptance number specified in MIL-STD-105, the entire lot of outfits shall be considered defective.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:11Z
Check the source to verify that this is the currentversion before use.

TABLE I. Visual examination of mopping outfits

Examination	Defects
Type I - Pressure-plate squeeze type outfits	See RR-W-670 and RR-B-800, shape A.
Type II - Gear and rack outfits	See RR-W-670 and RR-B-800, shape A.
Type III - Roller-type mopping outfits:	
Class 1 and 2:	
Classification (1.2.1)	Type, class, and set not as specified.
Materials (3.2)	Not as specified.
Design and construction:	
Buckets:	
Set A (with 14-quart bucket)	See RR-P-35.
Set B (with 16-quart bucket)	See RR-B-800, shape D.
Set C (with 20-quart bucket)	See RR-B-800, shape D.
Wringer rollers	Not centered on bearings.
	Surfaces do not come together evenly over entire length.
Mop guard	Missing.
Stability of outfit	Weight improperly distributed causing failure of outfit to remain in an upright position.
Operation	Rollers do not close when pressure is applied to foot pedal and automatically return to original position when pressure is released.
Workmanship	Burrs, slivers, rough or sharp edges or dents in metal parts. Dirt. Components not properly positioned. Rivets when used not neatly set or welded. Welds not complete and smooth. Evidence of burned through areas, porosity, cracks, or molten spatter. Other defects that may affect durability or serviceability.
Type III, class 2 only:	
Design and construction	Perforated or corrugated roller not supported by arms guided through slots in framework.
	One roller not perforated or corrugated (see 3.4.2.1).
	Not two swiveling and two nonswiveling rubber-tired casters as specified (see 3.4.2).

4.3.2.3 Dimensional examination of mopping outfits. Mopping outfits shall be examined for dimensional defects specified in table II. The sample unit shall be one complete outfit. The inspection level shall be S-4 and the acceptable quality level (AQL) 4.0 expressed in terms of percent defective. If any sample unit (outfit) fails to meet any dimensional requirement for which it is examined, it shall be considered defective. If the number of defective outfits in the sample exceeds the acceptance number specified in MIL-STD-105, the entire lot of mopping outfits shall be considered as having failed to meet the requirements of the specification.

TABLE II. List of dimensional defects in mopping outfits

Examination	Defects
Type I - Pressure-plate squeeze-type outfits:	
Wringers	See RR-W-670.
Buckets	See RR-B-800, shape A.
Type II - Gear and rack outfits:	
Wringers	See RR-W-670.
Buckets or buckets and truck, as applicable	See RR-B-800, shape A.
Type III - Roller-type outfits:	
Buckets:	
Set A (with 14-quart bucket)	See RR-P-35.
Set B (with 16-quart bucket)	See RR-B-800, shape D.
Set C (with 20-quart bucket)	See RR-B-800, shape D.
Wringers:	
Rollers	Length less than 11 inches.
	Diameter less than 1-7/8 inches (see 3.4.2).
Framework	Thickness less than 0.1875 inch a/ (see 3.4.1).
Bracket (class 1)	Thickness less than 0.075 inch a/ (see 3.4.1).

a. Three measurements shall be made at representative locations on the sample unit. If any measurement fails to meet the requirement for minimum thickness, the sample unit shall be considered defective.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:11Z
Check the source to verify that this is the current version before use.

4.3.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 are complied with. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot shall be the number of shipping containers offered for delivery at one time. The inspection level shall be S-2 and the AQL shall be 4.0 expressed in terms of defects per hundred units.

TABLE III. Examination of preparation for delivery

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strappings, or tape banding, and inadequate stapling. Bulging or distortion of containers.
Weight	Net weight exceeds the requirements of the applicable box specification.

4.3.2.5 Testing. Mopping outfits shall be tested as specified in 4.4. The inspection level shall be S-4 and the acceptable quality level (AQL) shall be 4.0 percent defective. The sample unit shall be one complete outfit. If any sample unit fails to meet any requirement for which tests are made, it shall be considered defective. If the number of defective sample units in the sample exceeds the acceptance number specified in MIL-STD-105, the entire lot of mopping outfits shall be considered as having failed to meet the requirements of the specification.

4.4 Tests.

4.4.1 Type I - Pressure-plate-squeeze and type II - Gear-and-rack mopping outfits.

4.4.1.1 Wringers. Wringers in types I and II mopping outfits shall be tested for conformance with the requirements for types I and II wringers, respectively, in RR-W-670 by the applicable methods specified therein (see 3.2.1 and 3.2.2).

4.4.1.2 Buckets with casters. Buckets with casters in types I and II mopping outfits shall be tested for conformance with the requirements for type I, class 1 in RR-B-800 as specified therein (see 3.2.1 and 3.2.2).

4.4.1.3 Buckets and truck combinations. Buckets and truck combination in type II, set CC shall be tested for conformance with the requirements for type II, class 3 in RR-B-800 as specified therein (see 3.2.2).

4.4.2 Type III - Roller-type mopping outfits.

4.4.2.1 Resistance to deformation. Roller-type mopping outfits shall be tested for resistance to deformation as follows: Apply a load of 250 pounds to the treadle for 5 to 10 seconds, remove the load, and examine the wringer for conformance with 3.5.

4.4.2.2 Caster test. Roller-type outfits with casters (type III, class 2) shall be tested under the same applicable conditions as buckets and bucket and truck combinations in RR-B-800 for conformance with 3.6.

4.4.2.3 Buckets without casters. Fourteen-quart buckets in type III, class 1, set A, outfits shall be tested as specified in RR-P-35 (see 3.2.3.1) for conformance with the applicable requirements therein. Sixteen-quart buckets in type III, class 1, set B outfits (see 3.2.3.1) shall be tested as specified in RR-B-800 for conformance with the applicable requirements therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly. Simple disassembly, which requires no special tools for assembly, shall be effected prior to packaging.

5.1.1.2 Packaging. Each mopping outfit, disassembled as specified in 5.1.1, shall be packaged in the most compact manner in a close-fitting box conforming to PPP-B-636, class domestic. The contents shall be immobilized and cushioned in a manner as to prevent movement or damage while in transit. Each box shall be closed in accordance with the appendix of the box specification (see 6.3).

5.1.2 Level C. Mopping outfits shall be packaged in accordance with the manufacturer's standard practice providing that this will insure protection for the outfit during shipment and provides for safe delivery to its destination.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Mopping outfits of one type, class, and set only, packaged as specified in 5.1 shall be individually packed in close-fitting boxes conforming to PPP-B-636, class weather resistant or to PPP-B-640, class 2. Each shipping container shall be closed, water-proof sealed and reinforced in accordance with the appendix of the applicable container specification. The weight of contents of the shipping containers shall be subject to the limitations of the applicable box specification.

5.2.2 Level B. Mopping outfits of one type, class, and set only, packaged as specified in 5.1 shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. Closure shall be in accordance with the appendix to the applicable container specification. The weight of contents of each shipping container shall be subject to the limitations of the applicable box specification.

5.2.3 Level C. Mopping outfits, packaged as specified in 5.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination in compliance with the National Motor Freight Classification rules and the Uniform Freight Classification rules.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, all marking shall be in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, all marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Floor mopping outfits covered by this specification are intended for use in cleaning small areas where the use of larger cleaning equipment would not be practical.

6.1.1 Ordering data. Purchasers should exercise any options offered herein (see 3.4.1.1 and 3.4.2.1) and procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type, class, and set, as applicable.
(c) Selection of applicable levels of packaging and packing required (see 5.1 and 5.2).
(d) Marking required (see 5.3).

6.2 For maximum performance and serviceability, it is recommended that the following combinations of mopping outfits and mops be used.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:11Z
Check the source to verify that this is the current version before use.

Mopping Outfits	Mop sizes [a]
Type II:	
Class 1:	
Set A	12-16 ounce
Set B	16-20 ounce
Sets C and CC	24-32 ounce
Class 2:	
Set A	12-16 ounce
Set B	16-24 ounce
Set C	24-32 ounce
Type III:	
Class 1:	
Set A	12-16 ounce
Set B	16-20 ounce
Class 2:	
Set C	24-32 ounce

a. Cotton mops described in T-M-561 or equivalent.

6.3 The following is a cross reference between mopping outfits in RR-M-1075 and those in RR-M-1075A.

RR-M-1075	RR-M-1075A
Type I:	Type III:
Class 1:	Class 1:
Size 0	Set A
Size 1	Set B
Class 2:	Class 2:
Size 2	Set C
Type II:	Type II:
Class 1:	Classes 1 and 2
Set A, size A-1	Set A (class 1 only)
Set A, size A-3	Deleted
Set B, size B-1	Deleted
Set B, size B-3	Set B
Set C, size C-3	Deleted
Set C, size C-4	Set C
Class 2:	Type II:
Set A, size A-1	Set A
Set A, size A-3	Deleted
Set B, size B-3	Set B
Set B, size B-1	Deleted
Set C, size C-4	Set C
Set CC, size CC-4	Set CC

Preparing Activity:
GSA
FSS

Coordinating Activities:
GSA
PBO
FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:11Z
Check the source to verify that this is the currentversion before use.

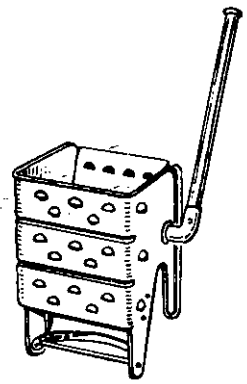


FIGURE 2. Type I, class 2 outfit. Combination horizontal and downward pressure wringer. Oval bucket mounted on spider chassis with casters as shown in figure 1.

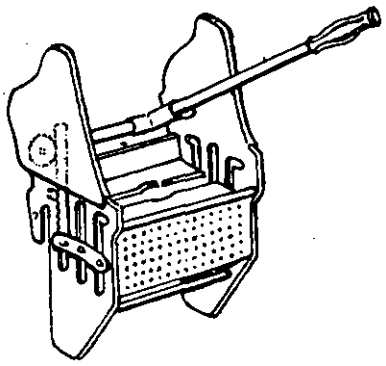


FIGURE 3. Type II outfit. Gear and rack wringer. Oval bucket mounted on spider chassis with casters as shown in figure 1.

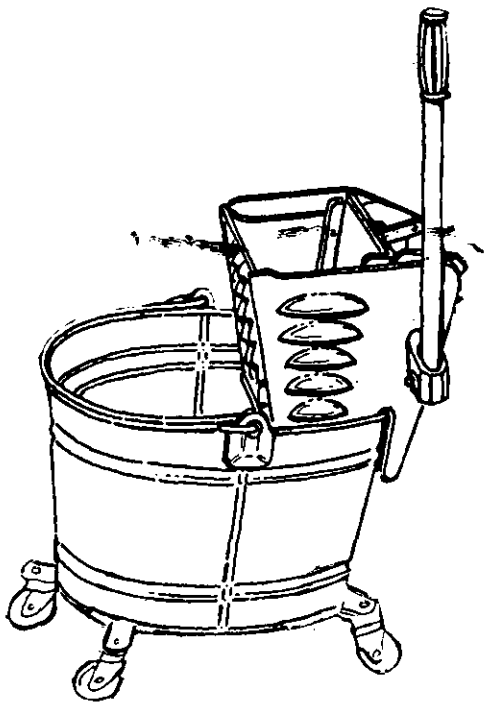


FIGURE 1. Type I, class 1 outfit. Horizontal-pressure squeeze-type wringer on oval bucket mounted on spider chassis with casters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

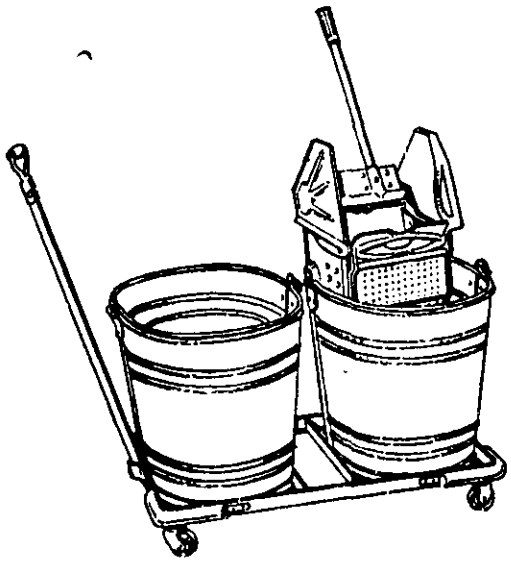


FIGURE 4. Type II, set CC. Gear and rack wringer and two oval buckets mounted on truck.

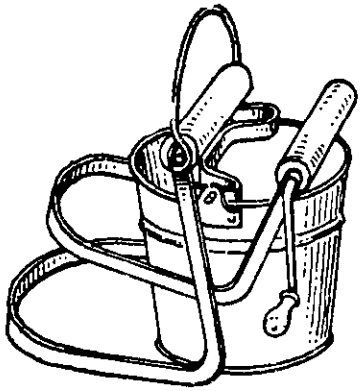


FIGURE 5. Type I, class 1 outfit. Integral roller-type wringer and bucket (without casters). (Crank-handle design shown above; pull-through design is equally acceptable.)

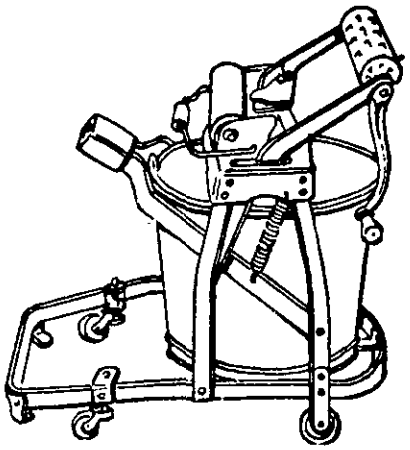


FIGURE 6. Type I, class 2 outfit. Roller-type wringer supported by slotted framework with casters, and single bucket.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:11Z
Check the source to verify that this is the current version before use.