RR-S-626b
APRIL 18, 1960
SUPERSEDING
Int. Fed. Spec. RR–S–00626a (GSA–FSS)
September 10, 1959
(See 6.4)

FEDERAL SPECIFICATION

SPRAYER, INSECTICIDE, MANUALLY CARRIED, (HAND-OPERATED)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—This specification covers hand-operated, manually carried, liquid insecticide sprayers that are generally used to exterminate flies and other insects. The sprayers may also be used for spraying hospitals, livestock barns, and other buildings with deoderants, disinfectancts, germicides, and similar liquid solutions.

1.1.1 *Federal specification coverage.*—This specification does not cover all types, classes, and sizes of insecticide sprayers, but only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types, classes and sizes.*—The hand-operated, liquid insecticide sprayers shall be of the following types, classes, and size numbers as specified (see 6.2):

Type I.—Continuous-acting spray.

Class 1.—Coated metal insecticide container (fig. 1).

Size 1.—1 fluid pint (min. capacity).
Size 2.—1 fluid quart (min. capacity).
Size 3.—2 fluid quarts (min. capacity).
Size 4.—2⅔ fluid quarts (min. capacity).

Class 2.—Glass jar insecticide container (fig. 2).

Size 1.—1 fluid pint (min capacity).
Size 2.—1 fluid quart (min. capacity).

Class 3.—Noncorrosive metal insecticide container (fig. 3).

Size 1.—1 fluid pint (min capacity).
Size 2.—1 fluid quart (min. capacity).
Size 3.—2 fluid quarts (min. capacity).

Type II.—Single-acting spray.

Class 1.—Coated metal insecticide container (fig. 4).

Size 1.—1 fluid pint (min capacity).
Size 2.—1 fluid quart (min. capacity).

Class 2.—Glass jar insecticide container (fig. 5).

Size 1.—1 fluid pint (min capacity).
Size 2.—1 fluid quart (min. capacity).

Type III.—Controlled-acting spray.

Class 1.—Coated metal insecticide container (fig. 6).

Size 2.—1 fluid quart (min. capacity).
Size 4.—2⅔ fluid quarts (min. capacity).

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards.—The following specifications and standards of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

issues in effect on date of invitation for bids form a part of this specification.

Federal Specifications:

QQ–I–716—Iron and Steel; Sheet, Zinc Coated (Galvanized).
QQ–T–181—Terne Plates (for Manufacturing Purposes).
QQ–T–425—Tinplate (Hot Dip and Electrolytic).
QQ–W–461—Wire, Steel, Carbon, Round, Bare and Coated.
PPP–B–591—Boxes, Fiberboard, Wood-Cleated.
PPP–B–621—Boxes, Wood, Nailed and Lock-Corner.
PPP–B–636—Box, Fiberboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

JAN–P–100—Packaging and Packing for Overseas Shipment—General Specification.
MIL–P–116—Preservation; Methods of.
MIL–L–10547 — Liners, Case, Waterproof.
MIL–B–10377—Box, Wood, Cleated, Veneer, Paper Overlaid.

Military Standards:

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes.
MIL–STD–129 — Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations.—The illustrations herein are for the convenience of identification and are not intended to preclude the purchase of hand sprayers which are otherwise in accordance with the requirements of this specification.

3.2 Materials.—The materials used in the construction of the insecticide sprayers shall be as specified herein. Materials not definitely specified shall be of a quality normally used for the purpose in good commercial practice. In order to prevent deterioration due to corrosion, all parts, units, and fittings that are exposed to the insecticide liquid shall be of corrosion-resisting material approved by the activity concerned or of a material treated in a manner to be adequately resistant to corrosion. Materials shall be free from defects and imperfections which might affect the serviceability of the finished product.

3.2.1 *Sheet metal.*—Sheet metal shall have a thickness of not less than 0.012 inch before coating for corrosion resistance.

3.2.1.1 *Tinplate.*—When tinplate is hereinafter specified for types I and II sprayers, the tinplate shall be in accordance with Federal Specification QQ–T–425, type I, grade 3, class A2, finish optional. When tinplate is hereinafter specified for type III sprayers, the tinplate shall be in accordance with type I, grade 4, class 50, finish optional, and of the box weight specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.2.1.2 *Zinc plate.*—When zinc plate is hereinafter specified, the zinc plating shall be in accordance with Federal Specification QQ–I–716, class D1.

3.2.1.3 *Lead plate.* — When lead plate or terneplate is hereinafter specified, the plating shall be in accordance with Federal Specification QQ–T–181, commercial type, coating weight 8-pound, grade B.

3.2.2 *Glass.*—The glass used in fabrication of class 2 sprayers shall be commercial fruit-jar glass. The glass may be either clear or colored, at the option of the contractor. The glass shall be transparent to the extent that the insecticide will be readily visible to the naked eye.

3.3 **Design.**—The sprayers shall be so designed as to rest on their supporting surfaces without capsizing when either in the full or empty condition.

3.4 **Construction.** — Construction shall be free from characteristics or defects which might render the sprayers unsuitable or inefficient for the purpose intended. Each sprayer shall include a liquid insecticide container secured to the end of a hand-operated plunger pump arranged in such a manner as to produce and direct a finely and equally divided circular, external spray, of viscous liquids having the consistency of kerosene and oil-base insecticides when tested as specified in 4.4.3. The sprayer shall be capable of being efficiently operated at any angle or in any position in which it might be held in actual service. The sprayers shall not leak, drip, or syphon.

3.4.1 *Liquid container.*—The liquid insecticide container shall be attached to the pump assembly either by screw threads or by permanent fabrication. The means of attachment shall provide a leakproof connection. A gasket shall be provided for the screw-thread type connection.

3.4.2 *Pump.*—Pump bodies shall be cylindrical in shape and fabricated from metal as hereinafter specified. Pump bodies shall be either of seamless or seamed tubing. Seams shall be folded (lock) type and airtight when tested as specified in 4.4.1. For civilian agencies, each pump shall have an easily removable, and efficient operating pump-plunger assembly consisting of a metal plunger rod not less than $\frac{3}{16}$ inch in diameter, of sufficient rigidity so as not to bend during its manipulation; a neat-fitting and securely fastened plunger cup of oil-treated leather or other suitable material; a cylinder cap, plunger-rod guide of hardwood or other suitable material; and a handle of wood, metal, or other suitable material. For military agencies, each pump shall have an easily removable and efficient operating pump-plunger assembly consisting of a metal plunger rod of hard galvanized wire not less than 0.192 inch in diameter conforming to Federal Specification QQ–W–461, round, Steel Number 1045, finish 4, class 2 of sufficient rigidity so as not to bend during its manipulation; a neat-fitting and securely fastened plunger cup of oil-treated leather or other suitable material; a cylinder cap, plunger-rod guide of hardwood fastened to the pump body by two oppositely located $\frac{5}{16}$-inch round-head screws; a plunger-rod handle of hardwood, $\frac{3}{4}$-inch in diameter and $2\frac{1}{2}$ inches long. Unless otherwise specified (see 6.2), the pump cylinder for sizes 2, 3, and 4 shall be expanded to $1\frac{5}{8}$ inches in diameter for $1\frac{1}{2}$ inches of the compression stroke.

3.5 **Type I, continuous-acting spray.**—Type I sprayers shall produce a continuous, uniform, and finely atomized circular spray during both the compression and retracting strokes of the pump plunger rod.

3.5.1 *Class 1.* — Type I, class 1 sprayers shall be furnished with a coated metal insecticide container (see figure 1). Unless otherwise specified, the insecticide container for sizes 1, 2, and 3, shall be either of tinplate or zinc-plated steel (see 6.2). Seams shall be double-folded (lock) type and liquid-tight when tested as specified in 4.4.2. Each container shall be provided with a threaded filler

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

opening having a liquid-tight cap with a durable gasket. For Military procurement, the threaded filler opening shall be not less than ⅞ inch in diameter.

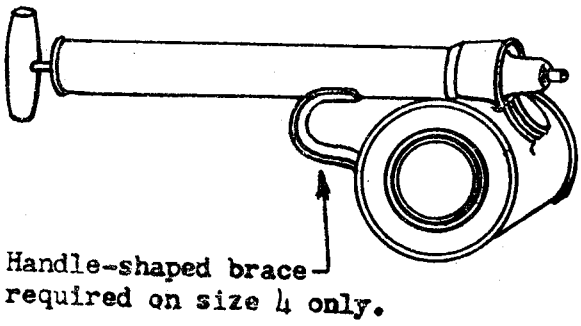


FIGURE 1.—Type I, class 1, continuous-acting spray with coated metal insecticide container.

3.5.1.1 *Size 1.*—The type I, class 1, size 1 sprayer shall have an insecticide container of not less than one-pint (28.875 cubic inches) capacity. The threaded filler opening shall be not less than ⅝-inch inside diameter.

3.5.1.2 *Size 2.*—The type I, class 1, size 2 sprayer shall have an insecticide container of not less than one-quart (57.750 cubic inches) capacity. The threaded filler opening shall be not less than ¾-inch inside diameter. When specified, the size 2 sprayer shall be equipped with a spray control valve (see 6.2). The spray control valve shall permit starting and stopping of the continuous spray, and retention of the unspent air pressure.

3.5.1.3 *Size 3.*—The type I, class 1, size 3 sprayer shall have an insecticide container of not less than two-quart (115.500 cubic inches) capacity. The threaded filler opening shall be not less than ¾-inch inside diameter.

3.5.1.4 *Size 4.*—The type I, class 1, size 4 sprayer shall have an insecticide container of not less than 2⅔-quart (153.960 cubic inches) capacity. The threaded filler opening shall be not less than ⅞-inch inside diameter. A metal brace shall be attached to the sprayer between the insecticide container and the pump assembly. The brace shall afford a comfortable handhold. Unless otherwise specified, the coating on the size 4 insecticide container shall be zinc plate (galvanized) (see 6.2).

3.5.2 *Class 2.*—Type I, class 2 continuous-acting sprayers shall be furnished with a removable glass insecticide container (see figure 2). The glass insecticide container shall be threaded the same as commercial fruit jars. The threaded connector on the pump body shall be threaded the same as commercial fruit-jar covers. The threaded connector, feed tube, and nozzle shall be of noncorrosive metal. The sprayer shall be provided with a sealing gasket. The gasket shall be resistant to light petroleum distillates.

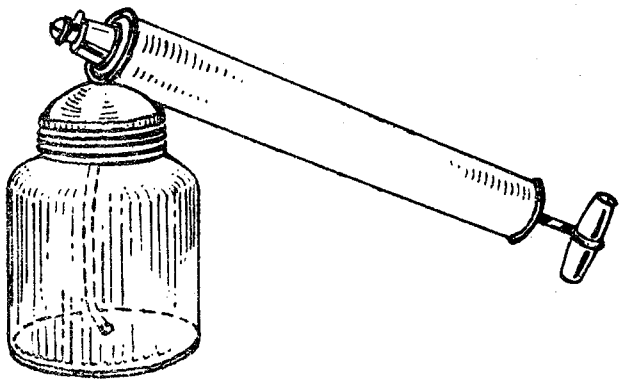


FIGURE 2.—Type I, class 2, continuous-acting spray with glass insecticide container.

3.5.2.1 *Size 1.*—Type I, class 2, size 1 continuous-acting sprayer shall have an insecticide container of not less than one-pint (28.875 cubic inches) capacity.

3.5.2.2 *Size 2.*—Type I, class 2, size 2 continuous-acting sprayer shall have an insecticide container of not less than one-quart (57.750 cubic inches) capacity.

3.5.3 *Class 3.*—Type I, class 3 continuous-acting sprayer shall be furnished with a noncorrosive metal insecticide container (see figure 3). The container and connector shall be threaded. For military agencies, the threads on the connector shall provide for assembly with glass commercial fruit jars.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

Unless otherwise specified, the noncorrosive metal insecticide container shall be either of brass or corrosion-resistant steel (see 6.2). The pump body and feed tube and nozzle shall be of a noncorrosive metal. The sprayer shall be provided with a sealing gasket. The gasket shall be resistant to light petroleum distillates.

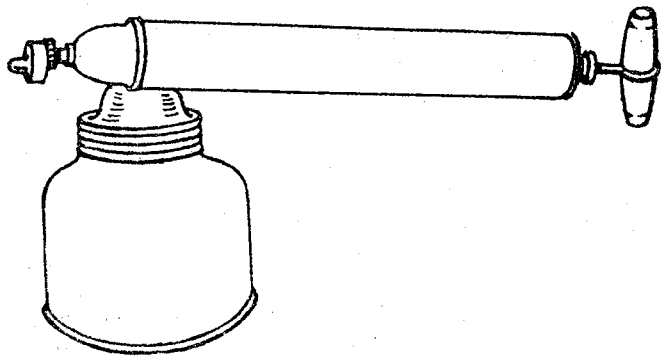


FIGURE 3.—Type I, class 3, continuous-acting spray with noncorrosive metal insecticide container.

3.5.3.1 *Size 1.*—The type I, class 3, size 1 continuous-acting sprayer shall have an insecticide container of not less than one pint (28.875 cubic inches) capacity. Either the top of the can shall afford a threaded filler opening or a separate threaded filler opening with cap shall be provided. The threaded filler opening shall be not less than 5/8-inch inside diameter.

3.5.3.2 *Size 2.*—The type I, class 3, size 2 continuous-acting sprayer shall have an insecticide container of not less than one quart (57.750 cubic inches) capacity. Either the top of the can shall afford a threaded filler opening or a separate threaded filler opening with cap and gasket shall be provided. The threaded filler opening shall be not less than 3/4-inch inside diameter.

3.5.3.3 *Size 3.*—The type I, class 3, size 3 continuous-acting sprayer shall have an insecticide container of not less than two quarts (115.500 cubic inches) capacity. Either the top of the can shall afford a threaded filler opening or a separate threaded filler opening with cap and gasket shall be provided. The threaded filler opening shall be not less than 3/4-inch inside diameter.

3.6 Type II, single-acting spray.—Type II sprayers shall produce a finely atomized circular spray during the compression stroke of the pump plunger rod. More than one nozzle or tube for spraying may be furnished provided the sprays merge into one finely atomized spray after discharge from the sprayer.

3.6.1 *Class 1.* — Type II, class 1, single-acting spray shall have a coated metal insecticide sprayer (see figure 4). Unless otherwise specified, the coating shall be either tinplate or zinc plate (galvanized) (see 6.2). The liquid feed nozzle(s) or tube(s) shall be fabricated from corrosion-resisting metal or tinplate and so located and supported that in normal usage it cannot be accidentally displaced from its operating position or damaged. The pump cylinder shall be made either of corrosion-resisting metal or tinplate. Each container shall be provided with a threaded filler opening having a liquid-tight cap with a durable gasket.

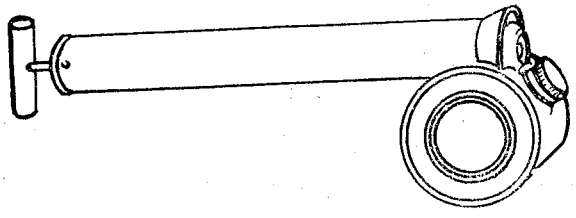


FIGURE 4. — Type II, class 1, single-acting spray with plated metal insecticide container.

✓ **3.6.1.1** *Size 1.*—Type II, class 1, size 1 single-acting spray shall have an insecticide container of not less than one pint (28.875 cubic inches) capacity. The threaded filler opening shall be not less than 5/8-inch inside diameter.

3.6.1.2 *Size 2.*—Type II, class 1, size 2 single-acting spray shall have an insecticide container of not less than one quarter (57.750 cubic inches) capacity. The threaded filler opening shall be not less than 3/4-inch inside diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.6.2 *Class 2.* — Type II, class 2, single-acting sprayers shall be equipped with a removable glass insecticide container (see figure 5). The glass insecticide container shall be threaded the same as a commercial fruit jar. The threaded connector on the pump assembly shall be threaded the same as a commercial fruit jar cover. The threaded connector on the pump assembly and the feed nozzle(s) or tube(s) shall be fabricated from corrosion-resisting metal. Unless otherwise specified, the pump cylinder shall be made of any of the following: Tinplate, zinc-coated (galvanized) steel sheet, or corrosion-resisting metal (see 6.2). The sprayer shall be provided with a sealing gasket. The gasket shall be resistant to light petroleum distillates.

3.6.2.1 *Size 1.* — Type II, class 2, size 1 single-acting sprayer shall have an insecticide container of not less than one-pint (28.875 cubic inches) capacity.

3.6.2.2 *Size 2.* — Type II, class 2, size 2 single-acting sprayer shall have an insecticide container of not less than one-quart (57.750 cubic inches) capacity.

3.7 Type III controlled-acting spray.—Type III sprayers shall produce a continuous, uniform, and finely atomized conical spray. The sprayer shall be provided with a spray control valve that shall permit starting and stopping of the continuous spray, and retention of the unspent air pressure. The sprayer shall be of the compression type whereby the operator can build up a pressure inside the insecticide container by use of a hand-operated pump.

3.7.1 *Class 1.*—Type III, class 1, controlled-acting sprayer shall be provided with a coated metal insecticide container.

3.7.1.1 *Size 2.*—Type III, class 1, size 2 controlled acting sprayer (see figure 6) shall have an insecticide container of not less than one-quart (57.750 cubic inches) capacity, approximately 4¼ inches in diameter and 4½ inches long. The sprayer shall be provided with a metal brace from the insecticide container to a midpoint on the length of the pump body. The brace shall afford a comfortable handhold. The discharge rate of the sprayer shall be not less than one fluid ounce per 18 full compression strokes. The conical spray shall have a cone angle of 20 degrees, plus or minus 4 degrees.

3.7.1.1.1 *Insecticide container.* — The insecticide container shall be of 135 pounds base box electrolytic tinplate as specified in 3.2.1.1. Seams shall be double-folded (lock) type and soldered. At point of attachment of the pump body, the container suitably perforated to permit the pump body to be imbedded 1/16 inch into the container. Each container shall be provided with a threaded filler opening of not less than 7/8 inch in diameter having a liquid-tight cap with a durable gasket.

3.7.1.1.2 *Pump.*—The pump body shall be of 107 pounds per base box electrolytic tinplate as specified in 3.2.1.1.

3.7.1.1.3 *Discharge assembly.* — The discharge assembly shall consist of a nozzle body, a nozzle, and a liquid discharge tube. The nozzle body shall be of brass and shall be

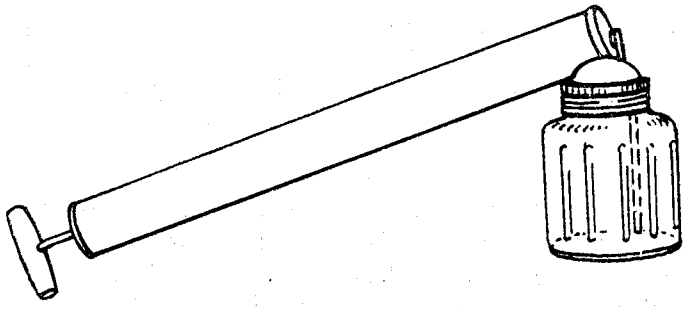


FIGURE 5.—Type II, class 2, single-acting spray with glass insecticide container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

soldered to the discharge end of the air-pump body. The nozzle shall be of brass, and it shall be provided with a spray control valve, with removable lever, which can be conveniently operated with thumb or finger. The sprayer control valve shall be so designed to permit it to be locked in either the open or closed positions. A hydrocarbon fuel resistant "O" ring gasket shall be provided as shown in figure 6. The diameter of the nozzle orifice shall be 0.031 inch. The liquid discharge tube shall be ⅛ inch seamless copper or brass tubing. The spring in the nozzle shall be of phosphor-bronze and it shall be securely fastened to the liquid tube. The components of the discharge assembly shall be easily removed for cleaning.

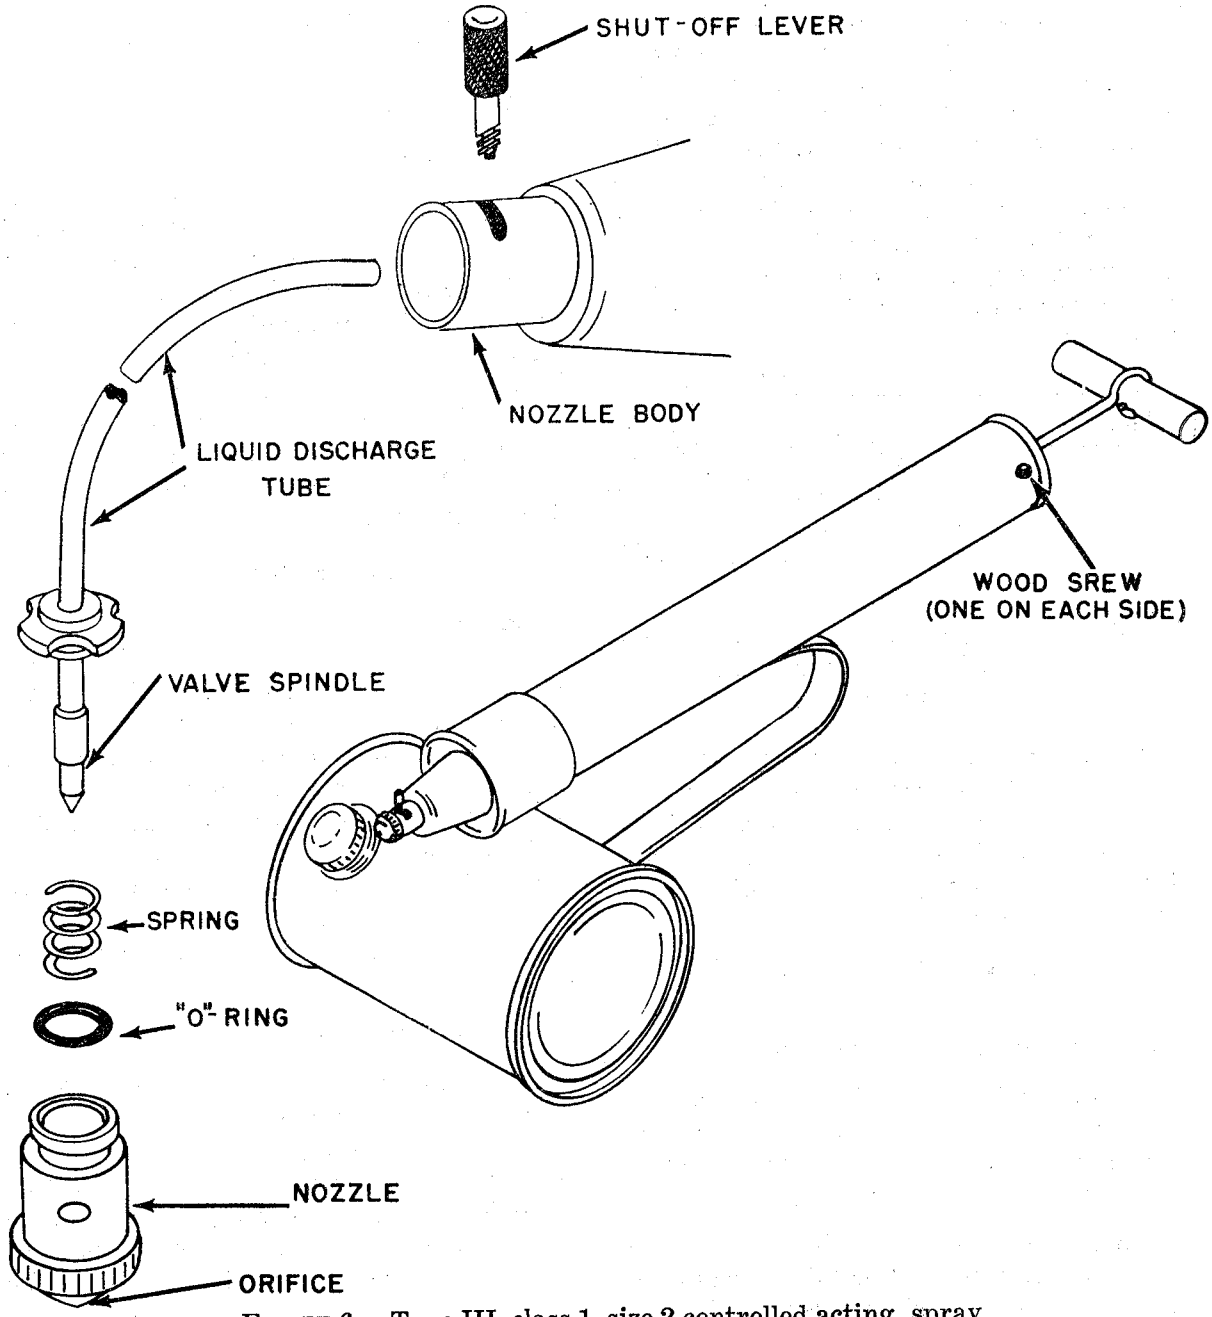


FIGURE 6.—Type III, class 1, size 2 controlled-acting spray with coated metal insecticide container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.7.1.2 *Size 4.*—Type III, class 1, size 4 controlled-acting sprayer (see figure 7) shall have an insecticide container of not less than 2⅔-quart (153.960 cubic inches) capacity. The threaded filler opening shall be not less than ⅞-inch inside diameter. The sprayer shall be provided with a metal brace between the insecticide container and the pump assembly. The brace shall afford a comfortable handhold. The control valve and feed tube shall be of a noncorrosive metal. Unless otherwise specified, the pump body shall be tin plate, lead plate (terne), or zinc plate (galvanized) steel sheet (see 6.2). Unless otherwise specified, the coating on the insecticide container shall be either zinc plate (galvanzied) or lead plate (terneplate) (see 6.2). The sprayer shall also provide a means whereby a coarse spray for residual spraying can be produced.

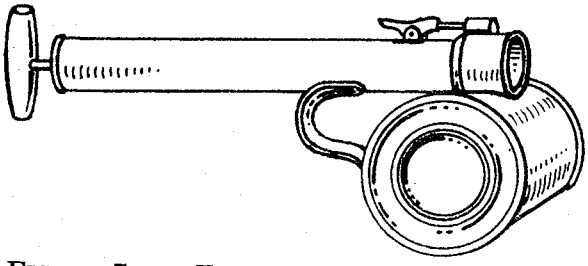


FIGURE 7. — Type III, class 1, controlled-acting spray with coated metal insecticide container.

3.8 **Workmanship.**—The sprayers shall be free from defects resulting from inferior workmanship. Burrs and sharp edges shall be removed. Wood handles shall be free from slivers and sharp edges which might injure the operator's hand.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling for lot acceptance.

4.1.1 *Inspection lot.*—All sprayers of the same type, class, and size presented at one time shall be considered a lot for purposes of acceptance, inspection, and tests.

4.1.2 *Sampling for inspection.*—A random sample of sprayers shall be taken from each inspection lot of material offered for Government inspection of visual and dimensional characteristics with lot acceptance based on sampling procedures outlined in Military Standard MIL–STD–105 at an AQL (Acceptable Quality Level) of 1.5 percent defective.

4.1.3 *Sampling for tests.* — Sampling for tests shall be in accordance with the appendix to Military Standard MIL–STD–105, using an AQL (Acceptance Quality Level) of 1.5 percent defective.

4.2 Examination.

4.2.1 *Visual and dimensional inspection.*— Each of the sample sprayers taken in accordance with 4.1.2, shall be visually and dimensionally inspected by the Government inspector to verify compliance with the requirements of this specification. Any sprayer in the sample containing one or more visual or dimensional defects shall be rejected, and if the number of defective sprayers in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.3 Lot acceptance tests.

4.3.1 *Testing of sample sprayers for lot acceptance.* — Each of the sample sprayers taken in accordance with 4.1.3 shall be tested in accordance with 4.4 to verify compliance with the requirements of this specification. Any sample sprayer which does not meet the requirements for any of these characteristics shall be rejected, and if the number of nonconforming sprayers in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.4 Test procedures.

4.4.1 *Tightness of pump seams and joints.* —The nozzles of the sample sprayers shall be sealed and the sprayers immersed in water. During this test there shall be no indication of air leakage at the pump seams and there shall be no rapid loss of air past the plunger valve during the compression stroke of the sprayer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

4.4.2 *Tightness of liquid container seams.*—The sample sprayer containers shall be filled with kerosene and allowed to stand for 4 hours and examined for leakage. There shall be no indication of leakage at the container seams.

4.4.3 *Spray pattern, nozzle drip, and syphon.*—Spray patterns as required in 3.4 shall be determined by spraying an oil-base liquid insecticide or a clear grade of kerosene. Type I sprayers shall produce a continuous spray during both the compression and retracting strokes of the pump operation rod. Type II sprayers shall produce a spray during the compression stroke of the pump operating rod. Following the spray test, determination shall be made of the spray pattern, discharge rate, particle size and that the sprayers do not drip or syphon at the nozzle tip.

5. PREPARATION FOR DELIVERY

(Civil agencies.—Federal Standard No. 102 should be referred to for definitions and applications of the various levels of packaging protection for supplies and equipment.)

5.1 Packaging.

5.1.1 *Level A.*—Sprayers shall be packaged by method III in accordance with Military Specification MIL–P–116.

5.1.2 *Level C.*—The sprayers shall be packaged in accordance with the manufacturer's commercial practice.

5.2 Packing.

5.2.1 *Level A.* — The sprayers shall be packed in overseas-type cleated-plywood, overseas-class nailed wood, overseas-type wood cleated fiberboard, or overseas cleated veneer boxes conforming to Federal Specification PPP–B–601, (styles, types and classes of plywood optional); Federal Specification PPP–B–621 (style optional), Federal Specification PPP–B–591 (style optional), Federal Specification PPP–B–636 (overseas type), or Military Specification MIL–B–10377 (style optional), respectively. Contents of boxes shall be cushioned, blocked, and braced in accordance with Military Specification JAN–P–100. Boxes shall be lined with waterproof caseliners conforming to Military Specification MIL–L–10547, sealed in accordance with the appendix thereto. Caseliners for boxes conforming to Federal Specification PPP–B–636 may be omitted, provided all corners and joints of the box are waterproof, sealed with tape in accordance with the appendix to the fiberboard box specification. The gross weight of wood and wood-cleated boxes shall not exceed approximately 200 pounds; gross weight of fiberboard boxes shall not exceed approximately 70 pounds.

5.2.2 *Level B.* — The sprayers shall be packed in domestic-type cleated-plywood, domestic-class nailed wood, domestic-type wood-cleated fiberboard, corrugated fiberboard, or solid fiberboard, or domestic-type wood-cleated veneer boxes, conforming to Federal Specification PPP–B–601 (style, type and class of plywood optional), Federal Specification PPP–B–621 (style optional), Federal Specification PPP–B–636 (style optional), or Military Specification MIL–B–10377 (style optional), respectively. Contents of boxes shall be cushioned, blocked or braced to prevent movement within the boxes. The gross weight of wood and wood-cleated boxes shall not exceed approximately 200 pounds. Fiberboard boxes shall be subject to the weight limitations of the applicable fiberboard box specification.

5.2.3 *Level C.* — The sprayers shall be packed in a manner which will insure arrival at destination in satisfactory condition and which will be acceptable to the carrier at lowest rates. The packing shall be in accordance with rules or regulations of carriers as applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Military purchases.*—Interior packages and shipping containers shall be marked in accordance with Military Standard MIL–STD–129.

5.3.2 *Civil agency purchases.*—In addition to any marking specified in the procurement documents, interior packages and shipping

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

containers shall be marked in accordance with Federal Standard No. 123.

6. NOTES

6.1 Intended use.—The sprayers covered by this specification are hand-operated, manually carried, liquid insecticide sprayers that are generally used to exterminate flies and other insects. The sprayers may also be used for spraying hospitals, livestock barns, and other buildings with deoderants, disinfectants, germicides, and similar liquid solutions. The type III, class 1, size 2 sprayers, are generally used by the Military agencies, and contain their specific requirements.

6.2 Ordering data.—Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type, class, and size number required (see 1.2.1).

(*c*) For Military purchases, if an expanded pump body is required, so state (see 3.4.2).

(*d*) If a specific kind of plating is required on the insecticide container for type I, class 1, sizes 1, 2, and 3 sprayers, state the kind of plating (see 3.5.1).

(*e*) If a spray control valve is required on type I, class 1, size 2 (1 quart) sprayer, so state (see 3.5.1.2).

(*f*) If other than zinc plate (galvanized) coating is required on type I, class 1, size 4 insecticide containers, state the kind of coating (see 3.5.1.4).

(*g*) If a specific kind of corrosion-resisting metal is required for type I, class 3 sprayers, state the kind of material (see 3.5.3).

(*h*) If a specific kind of plating is required on the insecticide containers for type II, class 1 sprayers, state the kind of plating (see 3.6.1).

(*i*) If a specific kind of plating or metal is required for the pump body of type II, class 2 sprayers, state the kind of plating (see 3.6.2).

(*j*) If a specific kind of plating is required for type III, class 1, size 4 pump body, state the kind of plating (see 3.7.1.1).

(*k*) If a specific kind of plating is required for type III, class 1, size 4 insecticide containers, state the kind of plating (see 3.7.1).

(*l*) State whether the commodities shall be afforded packaging in accordance with level A, or C (see 5.1.1, and 5.1.2).

(*m*) State whether the commodities shall be afforded packing in accordance with level A, B, or C (see 5.2.1, 5.2.2 and 5.2.3).

6.3 Illustrations.—The illustrations herein are for the convenience of identification and are not intended to preclude the purchase of sprayers which are otherwise in accordance with the requirements of this specification.

6.4 Superseding data.—The requirements for type II, 1-quart capacity sprayer covered by this specification supersedes Navy Department Specification 41S44. The requirements for type I, class 1, size 2 covered by this specification cover the requirements in Military Specification MIL–S–12119 (QMC).

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded, by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTEREST:
Army—EQ
Navy—Y S CG MC
Air Force.

Copies of this specification may be purchased for 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.