RR-W-1101A
October 31, 1972
SUPERSEDING
Int. Fed. Spec. RR-W-001101(GSA-FSS)
December 12, 1966

FEDERAL SPECIFICATION

WASTE RECEPTACLE, SWINGING DOORS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE. This specification covers one type and size metal receptacle for towels and waste.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-636 - Box, Fiberboard.
PPP-B-001088 - Bag, Cotton, Drill.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials.

3.1.1 Steel. Carbon steel sheets, strips or shapes used in the fabrication of items covered by this specification shall be either hot or cold rolled, commercial quality.

3.1.2 Spring wire. Wire shall be not less than 0.041 inch (18 gage) corrosion-resisting music wire.

3.1.3 Brass. Copper-zinc parts shall be of sufficient strength for rigidity and of sufficient hardness for wear.

3.1.4 Cotton drill cloth. Drill cloth used in the fabrication of the liners shall be white and shall not weigh less than 7.5 ounces per square yard.

3.2 Design and construction.

3.2.1 Illustrations. The illustrations shown herein are for the convenience of identification and are not intended to preclude the purchases of receptacles which are otherwise in accordance with the requirements of this specification.

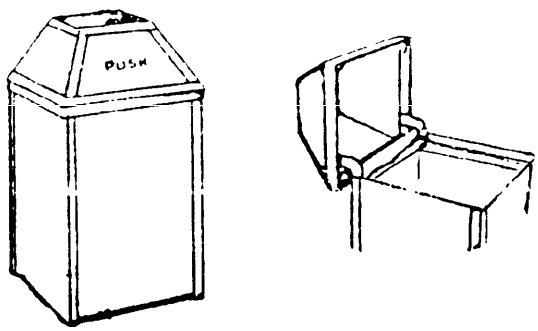


Figure 1. Swinging door waste receptacle

3.2.2 Body. The body shall be fabricated from 0.0299 inch (22 gage) ± .004 inch carbon steel. The sides shall be either welded to the legs or formed of one piece and welded at the seam, at the option of the manufacturer. The enclosure formed shall be 18 ± 3/8 inch square. The bottom or base shall be welded to the sides and legs not less than 1 inch from the floor. All seams and edges shall be smooth and free from burrs to prevent injury to persons or clothing. Four hooks for suspending acotton cloth liner, shall be attached to the inside of the receptacle and shall be spaced to accomodate the grommets specified in the liner described in 3.2.5.

3.2.3 Legs. Legs shall be formed of not less than 0.0478 ± .005 (18 gage) carbon sheet steel, into an equal leg 90° angle shape, 1-1/4 inch minimum in width. The legs shall extend the full length of the body of the receptacle forming the corners or if a one-piece body is provided, separate legs may be used. When full length legs are used, the legs shall be 26 ± 1/2 inches long. When separate legs are used, the minimum length of the legs shall be 3 inches. Feet shall be formed by turning under and inward each side of the legs, a minimum of 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.2.4 Top. The top shall be fabricated from 0.0299 ± .004 inch (22 gage) carbon steel into a hood, shaped similar to a trapezoid. The top of the hood shall be flat or slighty gabled, at the manufacturer's option, and shall be 9 ± 1/2 inches square. The overall height of the top shall be 9-3/4 ± 1/2 inches. The top shall be attached to the receptacle body by two (2) heavy duty stop-type steel hinges, 0.105 inch minimum thickness, that will allow the top to be swung back a minimum of 90° for easy removal of the cotton cloth liner. All edges and seams shall be finished smooth and free from burrs to prevent injury to persons or clothing.

3.2.4.1 Top edge. When the legs do not extend the full length of the receptacle, the top edge shall be either rolled with not less than a 1/4 inch rolled bead or shall be reinforced by welding an angle formed of not less than 0.043 inch (18 gage) thick carbon steel sheet with 1/2 x 7/8 ± 1/16 inch angle iron the full length of the perimeter of the top edge. The 1/2 inch angle iron the full length of the perimeter of the top edge. The 1/2 inch angle iron shall extend inward of the receptacle and the 7/8 inch angle iron shall extend downward along the outside of the receptacle. When the legs do not extend the full length of the receptacle the rolled edge shall have reinforcing wire not less than 0.0286 inch (22 gage) in diameter inside the roll around the four corners and shall extend not less than 3 inches along each adjacent side, except the reinforcing wire shall extend not less then 1 inch through the rolled bead at the welded seam.

3.2.4.2 Door opening. Two openings shall be provided in the top to accomodate swinging doors and the openings shall be not less than 7 inches or more than 8-3/8 inches in height and shall be not less than 12-3/4 inches or more than 15-1/2 inches in width.

3.2.4.3 Doors. Doors shall be of not less than 0.0299 ± .004 inch (22 gage) carbon steel sheet and shall be hinged at the top by a piano or butter-fly type of hinge at the option of the manufacturer. The doors shall be designed to swing inward independent of each other and shall be constructed to return to the completely closed position by either spring or gravity action at the manufacturers option. The word "PUSH" shall be embossed in each door in letters 1 inch minimum in height. Two rubber bumpers shall be securely attached to the bottom of each door, four rubber bumpers total.




FIG. 2

3.2.4.4 Hooks. Hooks shall be formed from either 0.083 inch thick (13 gage) minimum carbon sheet steel and shall be not less than 5/16 inch wide minimum (see fig. 2) or from 3/16 inch round carbon steel stock or .075 inch hard drawn wire stock. Two hooks shall be welded, riveted or secured with threaded fasterners to both the back side and front side of the receptacle, four hooks total. Swivel hooks shall be permitted. The hooks shall be spaced 15 ± 1/4 inches apart, center to center. The bottom of the hooks shall be located 22 ± 1 inches from the bottom of the receptacle and shall be capable of accommodating a cloth bag conforming to PPP-B-001088.

3.2.5 Liner. The liner shall be 16 inches square at the top and bottom and shall be 22-1/2 ± 1/2 inches in height and fabricated in accordance with PPP-B-001088. The bag shall be hemmed a minimum of 1-3/8 inch at the top. There shall be a grommet assembly securely attached to the bag through the hem at each corner of the bag. The gromments shall be spaced 15 ± 1/4 inches apart, center to center (see 3.2.2). The gromments shall be 1/2 inch ID minimum allowing easy removal and reattachment of the liner to the receptacle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

3.3 Finish.

3.3.1 Protective coating. Receptacle shall have a gloss enamel finish, inside and outside, colors green or white as specified (see 6.2).

3.3.2 Enamel. All enameled surfaces shall be free from runs and unevenly coated areas. When tested in accordance with 4.4.2, the enamel shall not chip or flake. Base metal exposure shall be limited to the sharp line left by the knife blade.

3.4 Workmanship. The receptacles shall not have any sharp edges which might cut or snag. Rivets, when used, shall be tightly set. Bolts, screws and nuts, when used, shall be of the standard American National Form and shall be installed with an adequate means for preventing loss of proper tightness. Doors shall swing and return freely and smoothly.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling.

4.2.1 Lot. Unless otherwise specified (see 6.2), a lot shall consist of all waste receptacles submitted for inspection at the same time.

4.2.2 Visual examination of end item. Sampling for this examination shall be according to level S-3 in MIL-STD-105. The Acceptable Quality Levels (AQL's) for defects listed in table I shall be 2.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.2.3 Sampling for tests. Sampling for tests shall be in accordance with level S-2 in MIL-STD-105. The AQL for tests shall be 6.5 on the basis of percent defective.

4.3 Examination.

4.3.1 End item. Receptacles selected in accordance with 4.2.2 shall be examined for defects listed in table I.

TABLE I. Classification of defects, end item

Defects	Major	Minor
Dimensions of receptacle not as specified.	X	
Sags, runs, laps, blisters, orange peel in enamel finish.	X	
Sharp or burred edges which might case injury.	X	
Doors do not operate freely and smoothly.	X	
One weld or fastener missing.		X
More than one weld or fastener missing.	X	
Component bent, dented, malformed or otherwise damaged or mispositioned.		X
Color not as specified.		X
Dimensions of liner not as specified.	X	
Grommets in liner out of position.	X	
Hole, cut or tear in liner.		X
Hooks out of position or missing.	X	
Damage or defects affecting function or serviceability.	X	
Damage or defects not affecting function or serviceability.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

4.3.2 Inspection of preparation for delivery. An inspection shall be made to determine that the packing and marking requirements comply with section 5 of this specification. Defects shall be scored in accordance with table II. For examination of contents the sample unit shall be one shipping container fully prepared for delivery selected just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closures listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

TABLE II. Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible, improper size, location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of container.

4.4 Tests.

4.4.1 General. Receptacles selected in accordance with 4.2.3 shall be tested for compliance with the requirements of this specification.

4.4.2 Enamel ashesion. Draw the point of a sharp knife across the enamel finish penetrating to the base metal over any portion of the inside or outside surface to determine compliance with 3.3.2.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A. Each waste receptacle shall be packed in an upright position in a close-fitting box conforming to PPP-B-636, class weather-resistant. The box shall be fitted with interior corner posts of fiberboard conforming to PPP-F-320, type CF, class domestic, variety DW, grade 200, extending the full depth of the box. The liner shall be attached to the inside of the receptacle. The box shall be closed and reinforced in accordance with the appendix to PPP-B-636.

5.1.2 Level B. Each waste receptacle shall be packed in an upright position in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be fitted with interior corner posts of fiberboard conforming to PPP-F-320, type CF, class domestic, variety DW, grade 200, extending the full depth of the box. The liner shall be attached to the inside of the receptacle. The box shall be closed in accordance with Method II of the appendix to PPP-B-636.

5.1.3 Level C. Each waste receptacle shall be packed for shipment in a manner which will insure acceptance by common carrier and safe delivery at distination. Containers shall conform to the requirements of the National Motor Freight Classification rules or Uniform Freight Classification rules, as applicable.

5.2 Marking. Marking shall be in accordance with 5.2.1 or 5.2.2.

5.2.1 Civil agencies. In addition to the markings required by 5.2.3, and any special markings required by the contract or order, (see 6.2) marking shall be in accordance with Fed. Std. No. 123.

5.2.2 Military agencies. In addition to the markings required by 5.2.3, and any special markings required by the contract or order, (see 6.2) marking shall be in accordance with MIL-STD-129.

5.2.3 Special marking. Each box shall be prominently marked on two opposite sides with arrows pointing towards the top of the box, and adjacent lettering which stated "THIS SIDE UP" and "HANDLE WITH CARE".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Waste receptacles covered by this specification are intended for collection towels and waste prior to bulk disposal.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and data of this specification.
(b) Color (see 3.3.1).
(c) Size of lot, if different from 4.2.1.
(d) Level of packing required (see 5.1).
(e) Special marking required (see 5.2.1 and 5.2.2).

Military Interests:

Army - GL
Navy - YD
Air Force - 84

Preparing activity:

GSA-FSS

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:11Z
Check the source to verify that this is the current version before use.